



# 电子元器件系列 (中国.厦门)

*www.rf-china.com* F-Micom co.,Ltd

厦门电话:0592-5713956

**EMail:sales@rf-china.com**

**Tel:0086-592-5713956 Fax:0592-5201617**

# Application matrix

Application area	Telecommunication	Electronic Data Processing (EDP)	Sound and Vision	Lighting
<b>Magnetic function</b>				
<b>Current transformers</b>	3C81, 3C90, 3E5, 3E6, 3E27 Toroids	3C81, 3C90, 3E5, 3E6, 3E27 Toroids	3C81, 3C90, 3E5, 3E6, 3E27 U, Toroids	
<b>Driver transformers</b>	3C81, 3C90, 3C94, 3E27 Toroids, E, ER, EP, EFD, RM/I, P/I	3C81, 3C90, 3C94, 3E27 Toroids, E, ER, EP, EFD, RM/I, P/I	3C81, 3C90, 3C94, 3E27 Toroids, E, ER, EP, EFD, RM/I, P/I	3C81, 3C90, 3C94, 3E27, 3F4 Toroids, E, ER, EP, EFD, RM/I, P/I
<b>EMI-suppression on PCB</b>	3B1, 3S1, 3S4, 4A15, 4B1, 4S2, 4S4, 4S7 BDW, BDS, CMS, IIC, MLS, WBS, WBC	3B1, 3S1, 3S4, 4A15, 4B1, 4S2, 4S4, 4S7 BDW, BDS, CMS, IIC, MLS, WBS, WBC	3B1, 3S1, 3S4, 4A15, 4B1, 4S2, 4S4, 4S7 BDW, BDS, CMS, IIC, MLS, WBS, WBC	
<b>EMI-suppression in power lines</b>	2P, 3B1, 3C90, 3S1, 3S3, 3S4, 4A15, 4B1, 4S2 BC, BDW, BDS, IIC, WBS, WBC, CMS, MHC, Toroids	2P, 3B1, 3C90, 3S1, 3S3, 3S4, 4A15, 4B1, 4S2 BC, BDW, BDS, IIC, WBS, WBC, CMS, MHC, Toroids	2P, 3B1, 3C90, 3S1, 3S3, 3S4, 4A15, 4B1, 4S2 BC, BDW, BDS, IIC, WBS, WBC, CMS, MHC, Toroids	2P, 3B1, 3C90, 3S1, 3S3, 3S4, 4A15, 4B1, 4S2 BC, BDW, BDS, IIC, WBS, WBC, CMS, MHC, Toroids
<b>EMI-suppression in mains filters</b>	2P, 3C11, 3E25, 3E26, 3E27, 3E5, 3E6, 3S4, 4A11, 4A15 Toroids (T, TC, TL, TN, TX), U cores (U)	2P, 3C11, 3E25, 3E26, 3E27, 3E5, 3E6, 3S4, 4A11, 4A15 Toroids (T, TC, TL, TN, TX), U cores (U)	2P, 3C11, 3E25, 3E26, 3E27, 3E5, 3E6, 3S4, 4A11, 4A15 Toroids (T, TC, TL, TN, TX), U cores (U)	2P, 3C11, 3E25, 3E26, 3E27, 3E5, 3E6, 3S4, 4A11, 4A15 Toroids (T, TC, TL, TN, TX), U cores (U)
<b>EMI-suppression on signal wires and cables</b>	4C65, 4B1, 3B1, 4A11, 4A15, 3C11, 3E25, 3E5, 3C90, 3S1, 3S4, 4S2 BD, MHC, TUB, Cable shields, Toroids (T, TC, TL, TN, TX)	4C65, 4B1, 3B1, 4A11, 4A15, 3C11, 3E25, 3E5, 3C90, 3S1, 3S4, 4S2 BD, MHC, TUB, Cable shields, Toroids (T, TC, TL, TN, TX)	4C65, 4B1, 3B1, 4A11, 4A15, 3C11, 3E25, 3E5, 3C90, 3S1, 3S4, 4S2 BD, MHC, TUB, Cable shields, Toroids (T, TC, TL, TN, TX)	
<b>EMI-absorbing powders and surfaces</b>	2S10, 4S10, 4S50, PFP10 Tiles (PLT), Granules, Powders	2S10, 4S10, 4S50, PFP10 Tiles (PLT), Granules, Powders		
<b>Filter inductors (signal)</b>	3D3, 3H3 RM, P, PT			
<b>Inductive delay lines</b>	3E27, 3E5, 3E6, 3E7, 3E8 Toroids	3E27, 3E5, 3E6, 3E7, 3E8 Toroids	3E27, 3E5, 3E6, 3E7, 3E8 Toroids	
<b>Line output transformers (LOT)</b>		3C15, 3C30, 3C34, 3C81 UR	3C15, 3C30, 3C34, 3C81 UR	
<b>Magnetic regulators</b>	3R1 Toroids	3R1 Toroids	3R1 Toroids	
<b>Power inductors</b>	3C81, 3C90, 3F3, 3F4, 3C91, 3C30, 2P, 3C94, 3F35 Toroids, U, E, ETD, Planar E, ER, PQ, RM/I, RM/ILP, P/I, PT, PTS	3C81, 3C90, 3F3, 3F4, 3C91, 3C30, 2P, 3C94, 3F35 Toroids, U, E, ETD, Planar E, ER, PQ, RM/I, RM/ILP, P/I, PT, PTS	3C81, 3C90, 3F3, 3C91, 3C30, 2P Toroids, U, E, ETD, Planar E, ER	3C81, 3C90, 3F3, 3F4, 3C91, 3C30, 2P, 3C94, 3F35 Toroids, U, E, ETD, Planar E, ER, PQ
<b>Power transformers</b>	3C81, 3C90, 3C91, 3F3, 3F4, 4F1, 3C94, 3C96, 3F35 E, EC, EFD, ETD, ER, Planar E, PQ, RM/I, RM/ILP, P/I, PT, PTS, Toroids	3C81, 3C90, 3C91, 3F3, 3F4, 4F1, 3C94, 3C96, 3F35 E, EC, EFD, ETD, ER, Planar E, PQ, RM/I, RM/ILP, P/I, PT, PTS, Toroids	3C81, 3C90, 3C91, 3F3, 3C94, 3C96 E, EC, EFD, ETD, ER, Planar E	3C81, 3C90, 3C91, 3F3, 3F4, 4F1, 3C94, 3C96, 3F35 E, EC, EFD, ETD, ER, Planar E
<b>Proximity switches</b>	3H1, 3D3, 3B7 PH			
<b>Tuning coils and antennas</b>	4E1, 4D2, 4C65, 4B1, 3B1, 3C90 ROD, TUB		4E1, 4D2, 4C65, 4B1, 3B1, 3C90 ROD, TUB	
<b>Wideband transformers</b>	3E1, 3E4, 3E5, 3E6, 3E7, 3E27, 3C11, 3E25, 3E55, 3E28 RM/I, P/I, E, ER, EFD, EP, Toroids, MHB	3E1, 3E4, 3E5, 3E6, 3E7, 3E27, 3C11, 3E25, 3E55, 3E28 RM/I, P/I, E, ER, EFD, EP, Toroids	3E1, 3E4, 3E5, 3E6, 3E7, 3E27, 3C11, 3E25, 3E55, 3E28 RM/I, P/I, E, ER, EFD, EP, Toroids	

# Application matrix

Domestic Appliances	Automotive Electronics	Measurement, Control, Scientific and Medical	Electric Tools	EMC services and Equipment
	3C81, 3C90, 3E5, 3E6, 3E27 U, Toroids	3C81, 3C90, 3E5, 3E6, 3E27, 4C65 U, Toroids		
3C81, 3C90, 3C94, 3E27 Toroids, E, ER, EP, EFD, RM/I, P/I	3C81, 3C90, 3C94, 3E27 Toroids, E, ER, EP, EFD, RM/I, P/I	3C81, 3C90, 3C94, 3E27 Toroids, E, ER, EP, EFD, RM/I, P/I	3C81, 3C90, 3C94, 3E27 Toroids, E, ER, EP, EFD, RM/I, P/I	
	3B1, 3S1, 3S4, 4A15, 4B1, 4S2, 4S4, 4S7 BDW, BDS, CMS, IIC, MLS, WBS, WBC	3B1, 3S1, 3S4, 4A15, 4B1, 4S2, 4S4, 4S7 BDW, BDS, CMS, IIC, MLS, WBS, WBC		3B1, 3S1, 3S4, 4A15, 4B1, 4S2, 4S4, 4S7 BDW, BDS, CMS, IIC, MLS, WBS, WBC
2P, 3B1, 3C90, 3S1, 3S3, 3S4, 4A15, 4B1, 4S2 BC, BDW, BDS, IIC, WBS, WBC, CMS, ROD, TUB, MHC, Toroids	2P, 3B1, 3C90, 3S1, 3S3, 3S4, 4A15, 4B1, 4S2 BC, BDW, BDS, IIC, WBS, WBC, CMS, ROD, TUB, MHC, Toroids	2P, 3B1, 3C90, 3S1, 3S3, 3S4, 4A15, 4B1, 4S2 BC, BDW, BDS, IIC, WBS, WBC, CMS, ROD, MHC, Toroids	2P, 3B1, 3C90, 3S1, 3S3, 3S4, 4A15, 4B1, 4S2 BC, BDW, BDS, IIC, WBS, WBC, CMS, ROD, TUB, MHC, Toroids	2P, 3B1, 3C90, 3S1, 3S3, 3S4, 4A15, 4B1, 4S2 BC, BDW, BDS, IIC, WBS, WBC, CMS, Toroids
2P, 3C11, 3E25, 3E26, 3E27, 3E5, 3E6, 3S4, 4A11, 4A15 Toroids (T, TC, TL, TN, TX), U cores (U)		2P, 3C11, 3E25, 3E26, 3E27, 3E5, 3E6, 3S4, 4A11, 4A15 Toroids (T, TC, TL, TN, TX), U cores (U)	2P, 3C11, 3E25, 3E26, 3E27, 3E5, 3E6, 3S4, 4A11, 4A15 Toroids (T, TC, TL, TN, TX), U cores (U)	2P, 3C11, 3E25, 3E26, 3E27, 3E5, 3E6, 3S4, 4A11, 4A15 Toroids (T, TC, TL, TN, TX), U cores (U)
	4C65, 4B1, 3B1, 4A11, 4A15, 3C11, 3E25, 3E5, 3C90, 3S1, 3S4, 4S2 BD, MHC, TUB, Cable shields, Toroids (T, TC, TL, TN, TX)	4C65, 4B1, 3B1, 4A11, 4A15, 3C11, 3E25, 3E5, 3C90, 3S1, 3S4, 4S2 BD, MHC, TUB, Cable shields, Toroids (T, TC, TL, TN, TX)		4C65, 4B1, 3B1, 4A11, 4A15, 3C11, 3E25, 3E5, 3C90, 3S1, 3S4, 4S2 BD, MHC, TUB, Cable shields, Toroids (T, TC, TL, TN, TX)
	2S10, 4S10, 3C90 Granules, Powders	2S10, 4S10, 4S50, PFP10 Tiles (PLT), Granules, Powders		2S10, 4S10, 4S50, PFP10 Tiles (PLT), Granules, Powders
		3D3, 3H3 RM, P, PT		
		3E27, 3E5, 3E6, 3E7, 3E8 Toroids		
		3C15, 3C30, 3C34, 3C81 UR		
3R1 Toroids				
3C81, 3C90, 3C91, 3C30, 2P Toroids, U, E, ETD, Planar E, ER, PQ	3C81, 3C90, 3F3, 3C91, 3C30, 2P, 3C94, 3F35 Toroids, U, E, ETD, Planar E, ER, PQ	3C81, 3C90, 3F3, 3F4, 3C91, 3C30, 2P, 3C94, 3F35 Toroids, U, E, ETD, Planar E, ER, PQ, RM/I, RM/ILP, P/I, PT, PTS		
3C81, 3C90, 3C91, 3C94, 3C96, 3F3 E, EC, EFD, ETD, ER, Planar E, PQ	3C81, 3C90, 3C91, 3F3, 3C94, 3C96, 3F35 E, EC, EFD, ETD, ER, Planar E, PQ, RM/I, RM/ILP, Toroids	3C81, 3C90, 3C91, 3F3, 3F4, 4F1, 3C94, 3C96, 3F35 E, EC, EFD, ETD, ER, Planar E, PQ, RM/I, RM/ILP, P/I, PT, PTS, Toroids		
		3D3 PH		
	4B1, 3B1, 3C90 ROD, TUB	4E1, 4D2, 4C65, 4B1, 3B1, 3C90 ROD, TUB		
	3E1, 3E4, 3E5, 3E6, 3E7, 3E27, 3C11, 3E25, 3E55, 3E28 RM/I, P/I, E, ER, EFD, EP, Toroids	3E1, 3E4, 3E5, 3E6, 3E7, 3E27, 3C11, 3E25, 3E55, 3E28 RM/I, P/I, E, ER, EFD, EP, Toroids		3E1, 3E4, 3E5, 3E6, 3E7, 3E27, 3C11, 3E25, 3E55, 3E28 RM/I, P/I, E, ER, EFD, EP, Toroids

# Materials and applications

property	test conditions				power transformers and power inductors													
	symbol	f (kHz)	$\hat{B}$ or H	T (°C)	unit	3C15	3C30	3C34 <sup>1)</sup>	3C81	3C90	3C91 <sup>1)</sup>	3C94	3C96 <sup>1)</sup>	3F3	3F4	3F35	4F1	3R1
$\mu_i (\pm 20\%)$		≤ 10	≤ 0.1mT	25		1800	2100	2100	2700	2300	3000	2300	2000	2000	900	1400	≈ 80	800
<b>B</b>		10	250A/m	100	mT	≥ 350	≥ 370	≥ 370	≈ 330	≥ 340	≥ 330	≥ 340	≥ 370	≥ 330	≥ 300	≥ 330	≥ 100	≥ 285
			3000A/m	25		≈ 500	≈ 500	≈ 500	≈ 450	≈ 450	≈ 450	≈ 450	≈ 500	≈ 450	≈ 450	≈ 500	≈ 350	≈ 450
<b>H<sub>c</sub></b>		10		25	A/m	≈ 15	≈ 15	≈ 15	≈ 15	≈ 15	≈ 15	≈ 15	≈ 15	≈ 15	≈ 60	≈ 40	≈ 150	≈ 40
<b>B<sub>r</sub></b>		10		25	mT	≈ 200	≈ 180	≈ 180	≈ 110	≈ 170	≈ 110	≈ 170	≈ 170	≈ 150	≈ 150	≈ 200	≈ 200	≈ 340
<b>P<sub>v</sub></b>		25	200 mT	100	kW/m <sup>3</sup>	≤ 140	≤ 80		≤ 185	≤ 80								
		100	100 mT			≤ 165	≤ 80	≤ 60		≤ 80	≈ 55 <sup>2)</sup>	≤ 60	≤ 45	≤ 80				
		100	200 mT				≈ 450	≤ 400		≈ 450	≈ 330 <sup>2)</sup>	≤ 400	≤ 330					
		200	100 mT				≈ 170											
		400	50 mT									≤ 170	≤ 140	≤ 150		≤ 80		
		500	50 mT													≤ 120		
		500	100 mT													≈ 800		
		1000	30 mT													≤ 200		
		3000	10 mT													≤ 320		≤ 200
		10000	5 mT															≤ 200
<b>T<sub>c</sub></b>				°C	≥ 190	≥ 240	≥ 240	≥ 210	≥ 220	≥ 220	≥ 220	≥ 240	≥ 200	≥ 220	≥ 240	≥ 260	≥ 230	
<b>ρ</b>		DC		Ω m	≈ 1	≈ 2	≈ 5	≈ 1	≈ 5	≈ 5	≈ 5	≈ 5	≈ 2	≈ 10	≈ 10	≈ 10 <sup>5</sup>	≈ 10 <sup>3</sup>	
<b>density</b>				kg/m <sup>3</sup>	≈ 4800	≈ 4800	≈ 4800	≈ 4800	≈ 4800	≈ 4800	≈ 4800	≈ 4800	≈ 4750	≈ 4700	≈ 4750	≈ 4600	≈ 4700	
<b>ferrite type</b>					MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	NiZn	MnZn	

Properties measured on sintered, unground ring cores of dimensions  $\varnothing 25 \times \varnothing 15 \times 10$  mm, which are not subjected to external stresses.

<sup>1)</sup> preliminary specification      <sup>2)</sup> at 60 °C

## Iron Powder Materials

property	test conditions				output chokes EMI-suppression					
	symbol	f (kHz)	$\hat{B}$ or H	T (°C)	unit	2P40	2P50	2P65	2P80	2P90
$\mu_i (\pm 10\%)$		≤ 10	≤ 0.1mT	25		40	50	65	80	90
<b>B</b>		10	25.10 <sup>3</sup> A/m	25	mT	900	1000	1150	1400	1600
<b>H<sub>c</sub></b>		10		25	A/m	2000	1800	1500	1200	900
<b>B<sub>r</sub></b>		10		25	mT	250	300	350	400	450
<b>T<sub>max</sub></b>					°C	140	140	140	140	140
<b>material</b>						Fe	Fe	Fe	Fe	Fe

Properties measured on sintered, unground ring cores of dimensions  $\varnothing 25 \times \varnothing 15 \times 10$  mm, which are not subjected to external stresses.

Products generally comply with the material specification. However deviations may occur due to shape, size and grinding operations etc. Specified product properties are given in the data sheets or product drawings.

## Power transformers/inductors

Power conversion is a major application area for modern ferrites. The introduction of Switched Mode Power Supplies (SMPS) has stimulated the development of a number of new ferrites and core shapes for power transformers, output chokes and input filters.

Power transformers and inductors generally operate under loss or saturation limited conditions. This requires special power ferrites with high saturation levels and low losses.

The power handling capability of a transformer is determined by circuit topology, frequency, core geometry and ferrite material, available winding area, and by other factors which depend on the specific application.

Each of the core types was developed for a specific application, therefore they all have advantages and drawbacks. The choice of a core type for a specific design depends on the design considerations and sometimes on the personal preference of the designer. The tables give information about availability of core/grade combinations and an overview of core types as a function of power throughput. This may be useful to the designer for an initial selection.

Ferrite choice	
frequency range	
< 100 kHz	3C81, 3C90, 3C91, 3C94, 3C96
< 400 kHz	3C94, 3C96
200-1000 kHz	3F4, 3F35
1-3 MHz	3F4, 4F1
> 3 MHz	4F1

## Output chokes

Output chokes have to operate with a DC load which causes a bias magnetic field. In a closed ferrite circuit this can easily lead to saturation. Power ferrites such as 3C90 or 3F35 start saturating at field strengths of about 50 A/m. Permeability drops sharply and the inductor loses its effectivity. There are two remedies against this effect:

- ◆ gapped ferrite cores
- ◆ a material with a low permeability and high saturation

The effect of an airgap in the circuit is that a much higher field strength is needed to saturate a core. For each operating condition an optimum airgap length can be found. In a design, the maximum output current (I) and the value of inductance (L) necessary to smooth the ripple current to the required level must be known. The product  $I^2L$  is a measure of the energy which is stored in the core during one half cycle.

Toroids made of compressed iron powder have a rather low permeability (max. 90) combined with a very high saturation level (up to 1500 mT). The permeability is low because the isolating coating on the iron particles acts as a so called distributed airgap. Therefore, 2P toroids can operate under bias fields of up to 2000 A/m.

Ferrite choice	
frequency range	
< 500 kHz	2P., 3C30, 3C90, 3C94
< 1 MHz	3C90, 3C94 3F35

## Magnetic regulators

Saturable inductors can be used to regulate several independent outputs of an SMPS by blocking the secondary of the transformer during variable lengths of time. The circuits required are both simple and economic and can easily be integrated. 3R1 ferrite material is a good alternative to amorphous metal, often used for these applications.

In technical performance 3R1 is comparable to amorphous metal, its price level is much lower. The squareness of the B-H loop would be spoiled by any airgap in the magnetic circuit, so a toroid or IIC without partial gap is the recommended shape.

Ferrite choice
3R1

## Line output transformers

Line output transformers (LOT) form a specific group of power transformers. They are used in TV sets and monitors to provide the voltage for the deflection coil and the high voltage for the picture tube. Traditionally the operating frequency is rather low (16 kHz) so a high throughput power density can only be achieved by means of a high flux density in the core. The high voltage output requires a special, resin potted winding. A large winding area is required and normally all windings are on one of the legs. A special U core type, with one round and one rectangular leg has become a standard for this application.

Switching frequency has recently increased to 32, 64 or 128 kHz for applications such as HDTV and special monitors.

For these applications, 3C30 and 3C34 with low losses up to 300 kHz in combination with high saturation levels are available.

Ferrite choice	
frequency range	
16 kHz	3C30
32 kHz	3C30
64 kHz	3C30, 3C34
128 kHz	3C34

# Materials and applications

Property	MnZn ferrite	NiZn ferrite	unit
Young's modulus	$(90 - 150) \times 10^3$	$(80 - 150) \times 10^3$	N/mm <sup>2</sup>
Compressive strength	200 – 600	200 – 700	N/mm <sup>2</sup>
Tensile strength	20 – 65	30 – 60	N/mm <sup>2</sup>
Vickers hardness	600 – 700	800 – 900	N/mm <sup>2</sup>
Coefficient of linear expansion	$(10 - 12) \times 10^{-6}$	$(7 - 8) \times 10^{-6}$	K <sup>-1</sup>
Specific heat	700 – 800	≈ 750	Jkg <sup>-1</sup> K <sup>-1</sup>
Thermal conductivity	$(3.5 - 5.0) \times 10^{-3}$	$(3.5 - 5.0) \times 10^{-3}$	Jmm <sup>-1</sup> s <sup>-1</sup> K <sup>-1</sup>

The above figures are the average values measured on a wide range of commercially available MnZn and NiZn materials

## Current transformers

A current transformer is used to measure or detect a current without making contact. A common example is a ring core with a winding around a current carrying wire. The magnetic field around the wire creates a flux in the ring core which leads to an output voltage directly proportional to the current in the winding.

In effect the wire acts as a one-turn primary for the current transformer. This principle is often used to measure currents in power converters, or to detect current in an earth-leak safety switch.

A split toroid or two U-core halves are used in applications such as oscilloscope measuring probes. The sensitivity of this type of transformer is largely controlled by the material permeability. So, depending on the current range, a high permeability grade is chosen. For AC the highest occurring frequency determines the choice of the material.

## Driver transformers

In many electronic circuits, small transformers are used to drive or trigger transistors, thyristors or MOSFETS. It is a convenient way to provide galvanic isolation and synchronisation or reversal of drive pulses.

Sometimes these transformers operate under low- signal conditions but in most cases they have to operate at high flux density. MOSFET gates have high capacitances and therefore require high currents to switch fast.

The choice of ferrite depends on these drive conditions and operating frequency. For low power the high permeability grades are suitable, more severe conditions require power materials.

Ferrite choice	
low - level drive	3H3, 3B7, 3E1, 3E27
high - level drive	3C81, 3C90, 3F35

Ferrite choice	
frequency range	
< 100 kHz	3E5, 3E6, 3E7
< 500 kHz	3E27
< 1 MHz	3B7, 3C81, 3C90, 3F35
< 10 MHz	4C65

Core shapes	
Ring cores	U cores

# Materials and applications

property	test conditions				filter inductors			wideband transformers									
	symbol	f (kHz)	$\hat{B}$ or H	T (°C)	unit	3D3	3H3	3B7	3E1	3E4	3E27	3E28	3E5	3E55	3E6 <sup>1)</sup>	3E7 <sup>1)</sup>	3E8 <sup>1)</sup>
$\mu_i$ ( $\pm 20\%$ )	< 10	< 0.1mT	25	-	750	2000	2300	3800	4700	6000	4000	10000	10000	12000	15000	18000	
$\tan \delta/\mu_i$	10												$\leq 10$	$\leq 10$	$\leq 10$	$\leq 10$	
	30					$\leq 1.6$						$\leq 25$	$\leq 30$	$\leq 30$	$\leq 30$	$\leq 30$	
	100					$\leq 2.5$	$\leq 5$	$\leq 20$	$\leq 20$	$\leq 15$	$\leq 5$	$\leq 75$					
	300					$\leq 10$		$\leq 150$	$\leq 150$								
	500																
	1000	< 0.1mT	25	( $\times 10^{-6}$ )	$\leq 30$		$\approx 120$										
	3000																
	10000																
$\eta_B$	10	1.5-3 mT	25	$10^{-3}T^{-1}$				$\leq 1.2$	$\leq 1$			$\leq 1$	$\leq 0.2$	$\leq 1$	$\leq 1$	$\leq 1$	
	100				$\leq 1.8$	$\leq 0.6$											
$\alpha_F$	< 10	< 0.1mT	5 to 25	$10^{-6}K^{-1}$		$0.7 \pm 0.3$											
			25 to 55		$0.7 \pm 0.3$												
			25 to 70		$1.5 \pm 1$	$0.7 \pm 0.3$	$0 \pm 0.6$										
$D_F$	10	< 0.1mT	25	$(\times 10^{-6})$	$\leq 12$	$\leq 3$	$\leq 3.5$	$\leq 5$	$\leq 5$								
	100																
<b>B</b>	10	250A/m	100	mT	$\approx 260$	$\approx 250$	$\approx 300$	$\approx 200$	$\approx 210$	$\approx 250$	$\approx 260$	$\approx 210$	$\approx 200^{2)}$	$\approx 210$	$\approx 210$	$\approx 150$	
		3000A/m	25		$\approx 400$	$\approx 400$	$\approx 450$	$\approx 400$	$\approx 400$	$\approx 400$	$\approx 400$	$\approx 380$	$\approx 380$	$\approx 380$	$\approx 380$	$\approx 380$	
<b>H<sub>c</sub></b>	10		25	A/m	$\approx 75$	$\approx 15$	$\approx 15$	$\approx 12$	$\approx 10$	$\approx 5$	$\approx 5$	$\approx 5$	$\approx 5$	$\approx 4$	$\approx 4$	$\approx 4$	
<b>B<sub>r</sub></b>	10		25	mT	$\approx 150$	$\approx 70$	$\approx 150$	$\approx 100$	$\approx 100$	$\approx 100$	$\approx 100$	$\approx 80$	$\approx 150$	$\approx 100$	$\approx 100$	$\approx 100$	
<b>T<sub>c</sub></b>			25	°C	$\geq 200$	$\geq 160$	$\geq 170$	$\geq 125$	$\geq 125$	$\geq 150$	$\geq 145$	$\geq 125$	$\geq 100$	$\geq 130$	$\geq 130$	$\geq 100$	
$\rho$	DC			$\Omega$ m	$\approx 2$	$\approx 2$	$\approx 1$	$\approx 1$	$\approx 1$	$\approx 0.5$	$\approx 1$	$\approx 0.5$	$\approx 0.1$	$\approx 0.1$	$\approx 0.1$	$\approx 0.1$	
<b>density</b>				kg/m <sup>3</sup>	$\approx 4700$	$\approx 4700$	$\approx 4800$	$\approx 4800$	$\approx 4800$	$\approx 4800$	$\approx 4800$	$\approx 4800$	$\approx 4900$	$\approx 5000$	$\approx 4900$	$\approx 4900$	$\approx 5000$
<b>ferrite type</b>					MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	

Properties measured on sintered, unground ring cores of dimensions  $\varnothing 25 \times \varnothing 15 \times 10$  mm which are not subjected to external stresses.

<sup>1)</sup> Measured on sintered, unground ring cores of dimensions  $\varnothing 14 \times \varnothing 9 \times 5$  mm which are not subjected to external stresses.

<sup>2)</sup> at 80°C

Products generally comply with the material specification. However deviations may occur due to shape, size and grinding operations etc. Specified product properties are given in the data sheets or product drawings.




# Bobbins & Accessories

Core Type	Pin Through-Hole (PTH)	Surface-Mount Device (SMD)	Specials
E (EF)	 <p>Sizes: E13, 16, 20, 30, 32, 42, 55, 65</p> <p>Clips and Clasps available for most products</p>	 <p>Sizes: E5.3, 6.3, 8.8, 13, 16</p> <p>Multi-section, Caps and Clips available</p>	 <p>Sizes: E16, 20</p> <p>High insulation two pieces male/female bobbins</p>
EFD	 <p>Sizes: EFD15, 20, 25, 30</p> <p>15 and 20 L-pin, low build height</p>	 <p>Sizes: EFD10, 12, 15, 20</p> <p>One piece pick and place metal Covers/Clasps, C-pin design</p>	
ETD	 <p>Sizes: ETD29, 34, 39, 44, 49, 54, 59</p> <p>Complete range in-moulded pins. Clips available</p>		 <p>Sizes: ETD34</p> <p>Two pieces male/female high insulation factor in-moulded pins</p>
EP	 <p>Sizes: EP6, 7, 10, 13, 17, 20</p> <p>All phenolic parts, both single Clips and Clasps/ Springs available</p>	 <p>Sizes: EP7, 10, 13</p> <p>Single Clips, C-pins phenolic version</p>	
ER		 <p>ER9.5, 11, 14.5</p> <p>Gullwing pin type in high performance thermoplastic. Clasps available</p>	
RM	 <p>Sizes: RM4, 5, 6, 7, 8, 10, 12, 14</p> <p>Clips available, both in-moulded and post-inserted pin versions</p>	 <p>Sizes: RM4, 5, 6</p> <p>Both phenolic and thermoplastic types, multi-section, low profile Clips available</p>	 <p>Sizes: RM4, 5, 6, 8, 10, 14</p> <p>In-moulded L-pin version for easy winding</p>
P + PQ	 <p>Sizes: P11, 14, 18, 22, 26, 30, 36, 42</p> <p>Multi-section, complete range of Bobbins, Tag-plates, Springs, Containers. High stability assembled product.</p>		 <p>Sizes: PQ20, 26, 32, 35</p> <p>L-pin post-inserted versions in high performance thermoplastic material</p>
Special Products		 <p>Sizes: T9</p> <p>Cover and Tagplate, C-pin version</p>	 <p>Custom Designs for all core types</p>
Special Products	 <p>Sizes: E16, 20</p> <p>High insulating and coupling factor. Robust design in phenolic material.</p>	 <p>Sizes: FRM 9,10,12,15</p> <p>C-pin version in high performance thermoplastic material.</p>	 <p>Sizes: E14, 18, 22</p> <p>Range of Clasps available</p>





# Integrated Inductive Components (IIC)

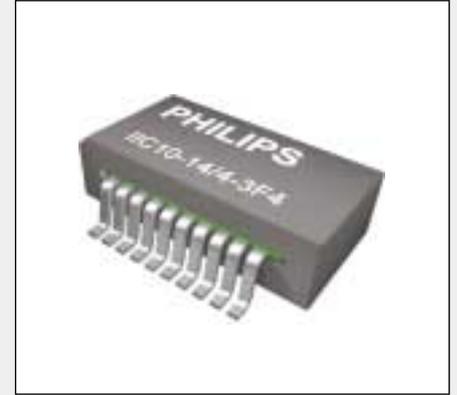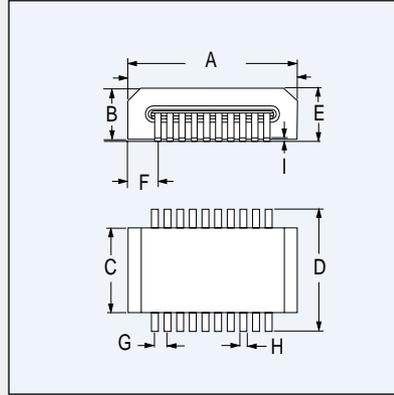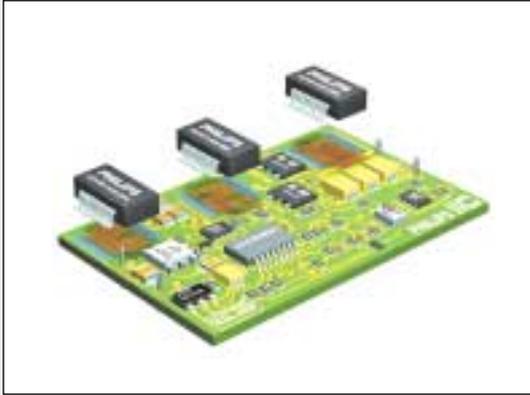


## IICs without partial airgap

Core type		IIC10-14/4 IIC10P-14/4
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	2.47
	eff. volume $V_e (\text{mm}^3)$	338
	eff. length $l_e (\text{mm})$	28.9
	eff. area $A_e (\text{mm}^2)$	11.7
	min. area $A_{\text{min}} (\text{mm}^2)$	11.7
	mass of core set (g)	≈ 1.85
dimensions (mm)	A	14.4 ± 0.2
	B	4 ± 0.08
	C	7.2 ± 0.15
	D	10.45 max
	E	4.38 max
	F	2.7 ± 0.2
	G	1.0
H	0.6 max	
I	0.3	



type number	$A_L$ (nH) at B 0.1 mT, f 10 kHz, T = 25°C	$A_L$ (nH) at B 0.1 mT, f 500 kHz, T = 25°C	$A_L$ (nH) at B 0.1 mT, f 1 MHz, T = 25°C	$ Z _{\text{typ}}$ (Ω) at 100 MHz for 1 turn, T = 25°C	E.T (V. μs) f = 100 kHz H = 800 A/m $I_{\text{reset}} = 70 \text{ mA}$ T = 100°C
IIC10-14/4-3E6	6000 ± 30%	-	-	-	-
IIC10-14/4-3F4	-	-	450 ± 25%	-	-
IIC10-14/4-3F35	-	700 ± 25%	-	-	-
IIC10-14/4-3R1	-	-	-	-	≥ 33
IIC10-14/4-3S4	-	-	-	≈ 35	-

## IICs with partial airgap

type number	L (μH) for 10 turns no bias current f = 100 kHz, T = 25°C	L (μH) for 10 turns no bias current f = 500 kHz, T = 25°C	L (μH) for 10 turns no bias current f = 1 MHz, T = 25°C	L (μH) for 10 turns with bias current 1A f = 100 kHz, T = 25°C	L (μH) for 10 turns with bias current 1A f = 500 kHz, T = 25°C	L (μH) for 10 turns with bias current 1A f = 1 MHz, T = 25°C
IIC10P-14/4-3C30	92 ± 25%	-	-	≥ 5	-	-
IIC10P-14/4-3F4	-	-	45 ± 25%	-	-	≥ 5
IIC10P-14/4-3F35	-	70 ± 25%	-	-	≥ 5	-

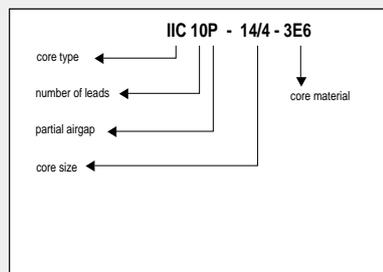

# Planar E cores

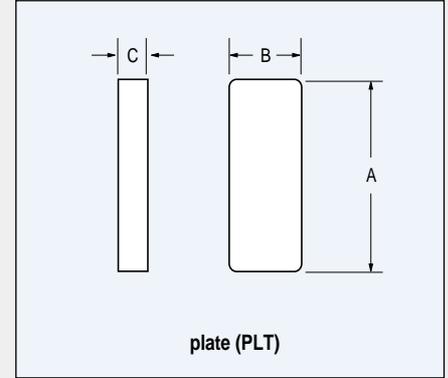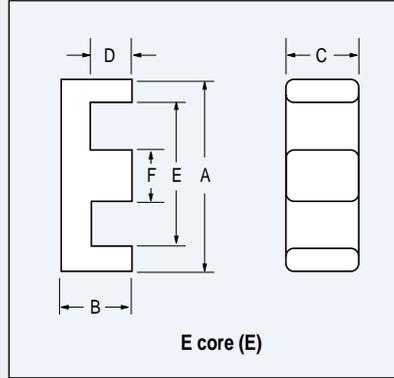

Planar magnetics offer an attractive alternative to conventional core shapes when a low profile of magnetic devices is required. Basically this is a construction method of inductive components whose windings are fabricated using printed circuit tracks or copper stampings separated by insulating sheets or constructed from multilayer circuit boards. These windings are placed in low profile ferrite EE- or E-PLT combinations. Planar devices can be constructed as stand alone components or 'integrated' into a multilayer mother board with slots for the ferrite E-core.

Principal advantages of planar magnetics are:

- ◆ Low profile construction
- ◆ Low leakage inductance
- ◆ Excellent repeatability of parasitic properties
- ◆ Ease of construction and assembly
- ◆ Cost effective
- ◆ Greater reliability
- ◆ Excellent thermal characteristics, easy to heatsink.


The Philips range of planar E cores are all made from press tooling. This gives the advantage of radiused corners and edges. It also means that clamp recesses can be incorporated.

Core type	dimensions (mm)						effective core parameters					
	A	B	C	D	E	F	core factor $\Sigma l/A$ (mm <sup>-1</sup> )	eff. volume $V_{e3}$ (mm <sup>3</sup> )	eff. length $l_e$ (mm)	eff. area $A_{e2}$ (mm <sup>2</sup> )	min. area $A_{min}$ (mm <sup>2</sup> )	mass of core half (g)
<b>E14/3.5/5</b> (E-E combination)	14 ± 0.3	3.5 ± 0.1	5 ± 0.1	2 ± 0.1	11 ± 0.25	3 ± 0.05	1.43	300	20.7	14.5	14.5	≈ 0.6
<b>PLT14/5/1.5</b> (E-PLT combination)	14 ± 0.3	5 ± 0.1	1.5 ± 0.05	-	-	-	1.16	240	16.7	14.5	14.5	≈ 0.5
<b>E18/4/10</b> (E-E combination)	18 ± 0.35	4 ± 0.1	10 ± 0.2	2 ± 0.1	14 ± 0.3	4 ± 0.1	0.616	960	24.3	39.5	39.5	≈ 2.4
<b>PLT18/10/2</b> (E-PLT combination)	18 ± 0.35	10 ± 0.2	2 ± 0.05	-	-	-	0.514	800	20.3	39.5	39.5	≈ 1.7
<b>E22/6/16</b> (E-E combination)	21.8 ± 0.4	5.7 ± 0.1	15.8 ± 0.3	3.2 ± 0.1	16.8 ± 0.4	5 ± 0.1	0.414	2550	32.5	78.5	78.5	≈ 6.5
<b>PLT22/16/2.5</b> (E-PLT combination)	21.8 ± 0.4	15.8 ± 0.3	2.5 ± 0.05	-	-	-	0.332	2040	26.1	78.5	78.5	≈ 4
<b>E32/6/20</b> (E-E combination)	31.75 ± 0.64	6.35 ± 0.13	20.32 ± 0.41	3.18 ± 0.13	24.9 min	6.35 ± 0.13	0.323	5380	41.7	129	129	13
<b>PLT32/20/3</b> (E-PLT combination)	31.75 ± 0.64	20.32 ± 0.41	3.18 ± 0.13	-	-	-	0.278	4560	35.9	129	129	10
<b>E38/8/25</b> (E-E combination)	38.1 ± 0.76	8.26 ± 0.13	25.4 ± 0.51	4.45 ± 0.13	30.23 min	7.62 ± 0.15	0.272	10200	52.6	194	194	≈ 25
<b>PLT38/25/4</b> (E-PLT combination)	38.1 ± 0.76	25.4 ± 0.51	3.81 ± 0.13	-	-	-	0.226	8460	43.7	194	194	≈ 18
<b>E43/10/28</b> (E-E combination)	43.2 ± 0.9	9.5 ± 0.13	27.9 ± 0.6	5.4 ± 0.13	34.7 min	8.1 ± 0.2	0.276	13900	61.7	225	225	≈ 35
<b>PLT43/28/4</b> (E-PLT combination)	43.2 ± 0.9	27.9 ± 0.6	4.1 ± 0.13	-	-	-	0.226	11500	50.8	225	225	≈ 24
<b>E58/11/38</b> (E-E combination)	58.4 ± 1.2	10.5 ± 0.13	38.1 ± 0.8	6.5 ± 0.13	50 min	8.1 ± 0.2	0.268	24600	81.2	305	305	≈ 62
<b>PLT58/38/4</b> (E-PLT combination)	58.4 ± 1.2	38.1 ± 0.8	4.1 ± 0.13	-	-	-	0.224	20800	68.3	305	305	≈ 44
<b>E64/10/50</b> (E-E combination)	63.8 ± 1.3	10.2 ± 0.13	50.3 ± 1	5.1 ± 0.13	53.6 ± 1.1	10.2 ± 0.2	0.156	40700	79.7	511	511	≈ 100
<b>PLT64/50/5</b> (E-PLT combination)	63.8 ± 1.3	50.3 ± 1	5.08 ± 0.13	-	-	-	0.136	35500	69.	511	511	≈ 78

# Planar E cores

Core type	E14/3.5/5	E18/4/10	E22/6/16	E32/6/20	E38/8/25	E43/10/28	E58/11/38	E64/10/50	
Matching plates	PLT14/5/1.5	PLT18/10/2	PLT22/16/2.5	PLT32/20/3	PLT38/25/4	PLT43/28/4	PLT58/38/4	PLT64/50/5	
core HALVES for use in combination with an ungapped E core or plate	3C90	A63 - E A63 - P A100 - E A100 - P A160 - E A160 - P 1280 / 1500	A100 - E A100 - P A160 - E A160 - P A250 - E A250 - P A315 - E A315 - P 3200 / 3680	A160 - E A160 - P A250 - E A250 - P A315 - E A315 - P A400 - E A400 - P A630 - E A630 - P 5150 / 6150	E160 - E A160 - P E250 - E A250 - P A315 - E A315 - P A400 - E A400 - P A630 - E A630 - P 6425 / 7350	E250 - E A250 - P E315 - E A315 - P E400 - E A400 - P A630 - E A630 - P A1000 - E A1000 - P 7940 / 9290	E250 - E A250 - P E315 - E A315 - P E400 - E A400 - P A630 - E A630 - P A1000 - E A1000 - P 8030 / 9250	E315 - E A315 - P E400 - E A400 - P E630 - E A630 - P A1000 - E A1000 - P A1600 - E A1600 - P 8480 / 9970	E630 - E A630 - P E1000 - E A1000 - P A1600 - E A1600 - P A2500 - E A2500 - P A3150 - E A3150 - P 14640/16540
	3C94 <b>des</b>	A63 - E A63 - P A100 - E A100 - P A160 - E A160 - P 1280 / 1500	A100 - E A100 - P A160 - E A160 - P A250 - E A250 - P A315 - E A315 - P 3200 / 3680	A160 - E A160 - P A250 - E A250 - P A315 - E A315 - P A400 - E A400 - P A630 - E A630 - P 5150 / 6150	E160 - E A160 - P E250 - E A250 - P A315 - E A315 - P A400 - E A400 - P A630 - E A630 - P 6425 / 7350				
	3C96 <b>prot</b>	1200 / 1350	2900 / 3250	4600 / 5450	6425 / 7350				
	3F3	A63 - E A63 - P A100 - E A100 - P A160 - E A160 - P 1100 / 1300	A100 - E A100 - P A160 - E A160 - P A250 - E A250 - P A315 - E A315 - P 2700 / 3100	A160 - E A160 - P A250 - E A250 - P A315 - E A315 - P A400 - E A400 - P A630 - E A630 - P 4300 / 5000	E160 - E A160 - P E250 - E A250 - P A315 - E A315 - P A400 - E A400 - P A630 - E A630 - P 5900 / 6780	E250 - E A250 - P E315 - E A315 - P E400 - E A400 - P A630 - E A630 - P A1000 - E A1000 - P 7250 / 8500	E250 - E A250 - P E315 - E A315 - P E400 - E A400 - P A630 - E A630 - P A1000 - E A1000 - P 7310 / 8700	E315 - E A315 - P E400 - E A400 - P E630 - E A630 - P A1000 - E A1000 - P A1600 - E A1600 - P 7710 / 9070	E630 - E A630 - P E1000 - E A1000 - P A1600 - E A1600 - P A2500 - E A2500 - P A3150 - E A3150 - P 13300/15050
	3F35 <b>prot</b>	900 / 1050	2200 / 2500	3500 / 4100					
	3F4 <b>des</b>	A63 - E A63 - P A100 - E A100 - P A160 - E A160 - P 650/780	A100 - E A100 - P A160 - E A160 - P A250 - E A250 - P A315 - E A315 - P 1550 / 1800	A160 - E A160 - P A250 - E A250 - P A315 - E A315 - P A400 - E A400 - P A630 - E A630 - P 2400 / 2900	E160 - E A160 - P E250 - E A250 - P A315 - E A315 - P A400 - E A400 - P A630 - E A630 - P 3200 / 3700	E250 - E A250 - P E315 - E A315 - P E400 - E A400 - P A630 - E A630 - P A1000 - E A1000 - P 3880 / 4600	E250 - E A250 - P E315 - E A315 - P E400 - E A400 - P A630 - E A630 - P A1000 - E A1000 - P 3870 / 4660	E315 - E A315 - P E400 - E A400 - P E630 - E A630 - P A1000 - E A1000 - P A1600 - E A1600 - P 4030 / 4780	E630 - E A630 - P E1000 - E A1000 - P A1600 - E A1600 - P A2500 - E A2500 - P A3150 - E A3150 - P 6960 / 7920
	high $\mu$ halves	3E6	5600/6400	13500/15500	22000/26000				




- E160 - E — gapped core half with symmetrical gap (E).  $A_L = 160$  nH measured in combination with an Equal-gapped E core half.
- A25 - E — gapped core half with asymmetrical gap (A).  $A_L = 25$  nH in combination with an ungapped E core half.
- A25 - P — gapped core half with asymmetrical gap (A).  $A_L = 25$  nH in combination with a plate.
- 1100/1300 — ungapped core half.  $A_L = 1100/1300$  nH measured in combination with an ungapped half / plate.

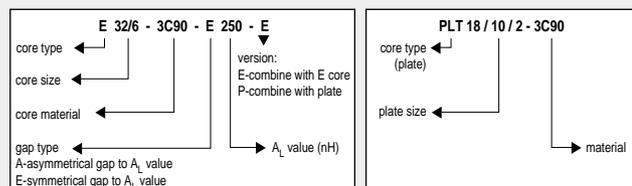

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance:  $\pm 3\%$   $\pm 5\%$   $\pm 8\%$   $\pm 10\%$   $\pm 25\%$   $+40\%$   $-30\%$

# Planar E cores with recess

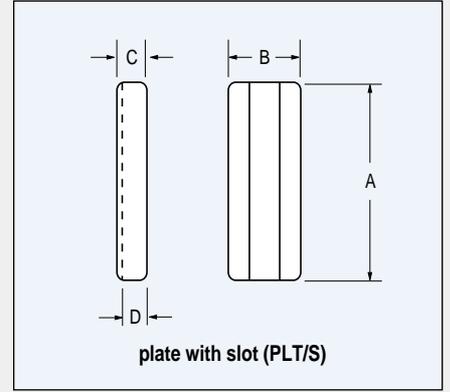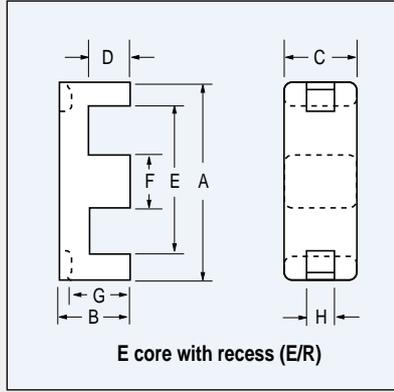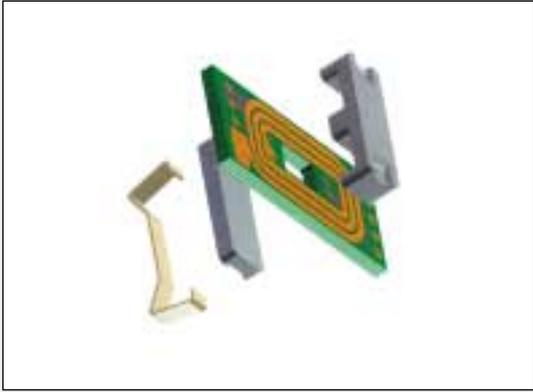

For those customers not in favor of glueing we developed a new range of planar E cores with matching plates and metal clamps. These cores can easily be mounted together with the PCB winding without the use of any glue. The E cores have recesses (E/R) to prevent the clamp from slipping off. The plates have slots (PLT/S) to limit any sideways movement during vibrations or shocks. This clamping method is only available for E-PLT-combinations, not for EE-combinations. It is particularly suitable for the cores in high permeability materials like 3E6. Any glue on the mating faces would potentially degrade the high  $A_L$  value of these core assemblies. Planar cores in high  $\mu$  material 3E6 are recommended for use in common mode input filters or in wideband transformers.

**Summary:**

- ◆ no glue necessary
- ◆ plate with slot to prevent sideways movement
- ◆ no  $A_L$  reduction of high permeability cores due to glue on the mating faces




Core type		E14/3.5/5/R	PLT14/5/1.5/S (E-PLT combination)	E18/4/10/R	PLT18/10/2/S (E-PLT combination)	E22/6/16/R	PLT22/16/2.5/S (E-PLT combination)
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	-	1.15	-	0.498	-	0.324
	eff. volume $V_e (\text{mm}^3)$	-	230	-	830	-	2100
	eff. length $l_e (\text{mm})$	-	16.4	-	20.3	-	26.1
	eff. area $A_e (\text{mm}^2)$	-	14.2	-	40.8	-	80.4
	min. area $A_{\min} (\text{mm}^2)$	-	10.9	-	35.9	-	72.6
	mass of core half (g)	≈ 0.6	≈ 0.5	≈ 2.4	≈ 1.7	≈ 6.5	≈ 4
dimensions (mm)	A	14 ± 0.3	14 ± 0.3	18 ± 0.35	18 ± 0.35	21.8 ± 0.4	21.8 ± 0.4
	B	3.5 ± 0.1	5 ± 0.1	4 ± 0.1	10 ± 0.2	5.7 ± 0.1	15.8 ± 0.3
	C	5 ± 0.1	1.8 ± 0.05	10 ± 0.2	2.4 ± 0.05	15.8 ± 0.3	2.9 ± 0.05
	D	2 ± 0.1	1.5 ± 0.1	2 ± 0.1	2 ± 0.1	3.2 ± 0.1	2.5 ± 0.1
	E	11 ± 0.25	-	14 ± 0.3	-	16.8 ± 0.4	-
	F	3 ± 0.05	-	4 ± 0.1	-	5 ± 0.1	-
	G	2.8 ± 0.15	-	3.3 ± 0.15	-	4.7 ± 0.15	-
	H	2.5 ± 0.2	-	2.5 ± 0.2	-	2.8 ± 0.2	-
mounting parts	CLM		■		■		■

# Planar E cores with recess

Core type	E14/3.5/5/R	E18/4/10/R	E22/6/16/R
-----------	-------------	------------	------------

Matching plates	PLT14/5/1.5/S	PLT18/10/2/S	PLT22/16/2.5/S
-----------------	---------------	--------------	----------------

core HALVES for use in combination with a plate	3C90	A63-P	A100-P	A160-P	
		A100-P	A160-P	A250-P	
		A160-P	A250-P	A315-P	
	3C94 <b>des</b>	1500	A315-P	A400-P	
			3680	A630-P	
				6150	
	3C96 <b>prot</b>	A63-P	A100-P	A160-P	
		A100-P	A160-P	A250-P	
		A160-P	A250-P	A315-P	
	3F3	1500	A315-P	A400-P	
			3680	A630-P	
				6150	
	3F35 <b>prot</b>	1350	3250	5450	
		3F4 <b>des</b>	A63-P	A100-P	A160-P
			A100-P	A160-P	A250-P
A160-P	A250-P		A315-P		
3E6	780	A315-P	A400-P		
		3100	A630-P		
			5000		
high $\mu$ core HALVES for use in combination with a plate	1050	2500	4100		
	6400	15500	26000		
			2900		

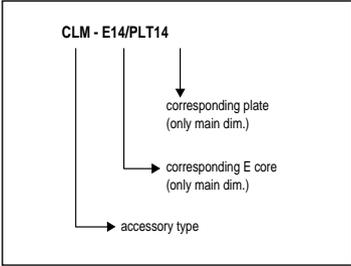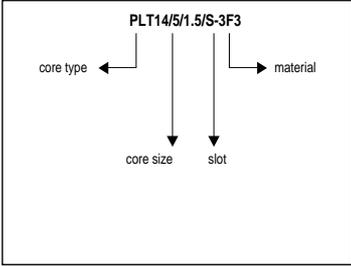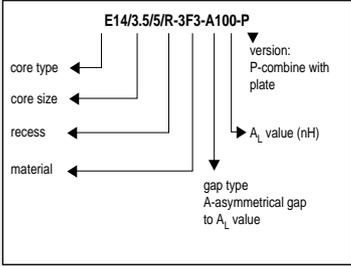

E/R = E core with recess




PLT/S = Plate with slot

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 3% ± 5% ± 8% ± 25% + 40%  
- 30%

A63-P — gapped core half with asymmetrical gap (A),  $A_L = 63$  nH measured in combination with a plate.  
 1280 — ungapped core half,  $A_L = 1280$  nH measured in combination with a plate.

# E cores

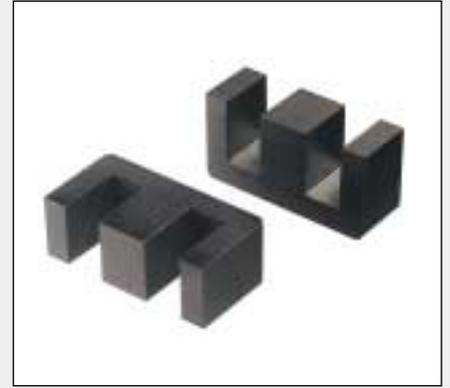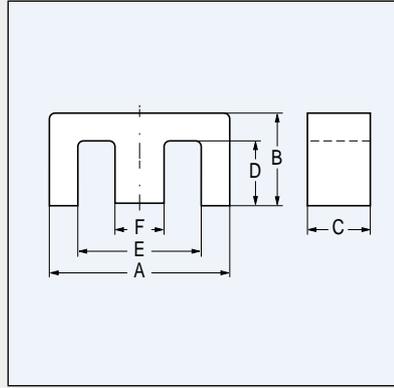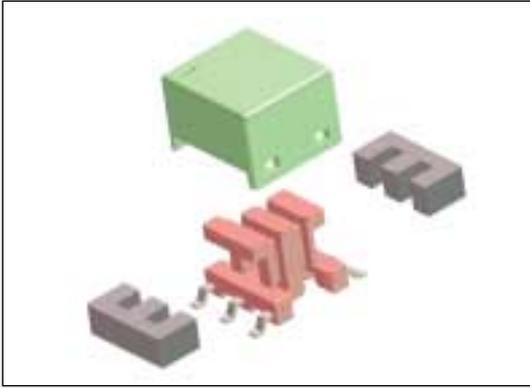




The shape of E core is derived from the classical iron sheet lamination cores. For the original E range in fact the dimensions of the existing lamination range were taken so that already commercially available coil formers and mounting hardware could be used. The former EF range has been optimized for the use of ferrite as a core material. Cross sections were rearranged resulting in a homogenous magnetic flux density in the core and more space for the windings. Main use is as power transformer or choke in SMPS. E cores have a simple shape and can therefore be produced more economically than more complicated cores.

A drawback is the rectangular cross-section of the centre pole which makes it more difficult to wind, especially with heavy wires. Also the structure of the core is rather open resulting in stray flux sometimes causing interference problems.

**Summary:**




- ◆ simple, economic shape
- ◆ square cross-section, not easy for heavy wires
- ◆ large effective ferrite area
- ◆ low magnetic self shielding

Core type (old core description)		E5.3/2.7/2	E6.3/2.9/2	E8.8/4.1/2	E13/6/3	E13/6/6 (814E250)	E13/7/4 (EF12.6)	E16/8/5 (EF16)	
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	4.70	3.67	3.13	2.74	1.37	2.39	1.87	
	eff. volume $V_e (\text{mm}^3)$	33.3	40.6	78	281	559	369	750	
	eff. length $l_e (\text{mm})$	12.5	12.2	15.6	27.8	27.7	29.7	37.6	
	eff. area $A_e (\text{mm}^2)$	2.66	3.3	5.0	10.1	20.2	12.4	20.1	
	min. area $A_{\text{min}} (\text{mm}^2)$	2.63	2.6	3.6	10.1	20.2	12.2	19.3	
	mass of core half (g)	≈ 0.08	≈ 0.12	≈ 0.25	≈ 0.7	≈ 1.4	≈ 0.9	≈ 2.0	
dimensions (mm)	A	5.25 ± 0.1	6.3 – 0.25	9 ± 0.4	12.7 ± 0.25	12.7 ± 0.25	12.6 + 0.5 / -0.4	16 + 0.7 / -0.5	
	B	2.65 ± 0.05	2.9 – 0.1	4.1 – 0.2	5.7 ± 0.13	5.7 ± 0.13	6.5 – 0.2	8.2 – 0.3	
	C	2.0 – 0.1	2.0 – 0.1	2.0 – 0.2	3.18 ± 0.13	6.4 ± 0.13	3.7 – 0.3	4.7 – 0.4	
	D	1.9 + 0.15	1.85 + 0.1	2.03 + 0.32	4.1 ± 0.13	4.1 ± 0.13	4.5 + 0.3	5.7 + 0.4	
	E	3.8 + 0.2	3.6 + 0.2	5.2 ± 0.13	9.5 ± 0.25	9.5 ± 0.25	8.9 + 0.6	11.3 + 0.6	
	F	1.4 – 0.1	1.4 – 0.1	1.9 ± 0.12	3.2 ± 0.13	3.2 ± 0.13	3.7 – 0.3	4.7 – 0.3	
coil formers	CP					1S			
	CPH						1S - 6P	1S - 6P	
	CPHS	1S - 4P		1S - 4P					
		1S - 6P		1S - 6P					
		2S - 4P		2S - 4P					
		2S - 6P		2S - 6P					
	CPV								
CSH							1S-9P		
CSHS						1S - 10P			
mounting parts	CLM	■							
	CLA								
	CLI	■							
	SPR								
	COV	■	■				■		

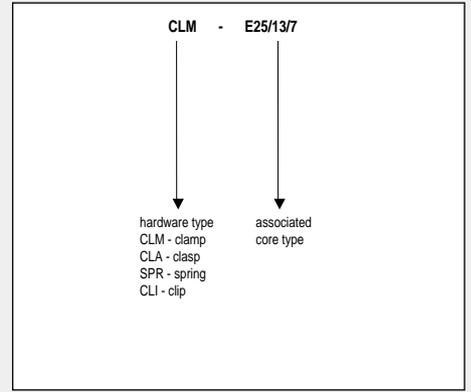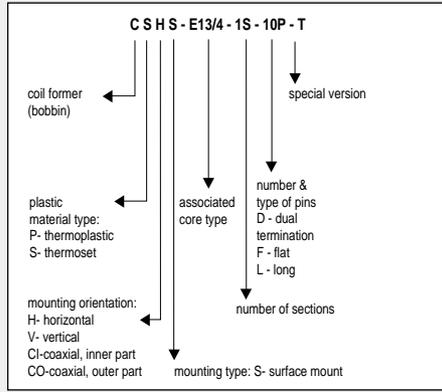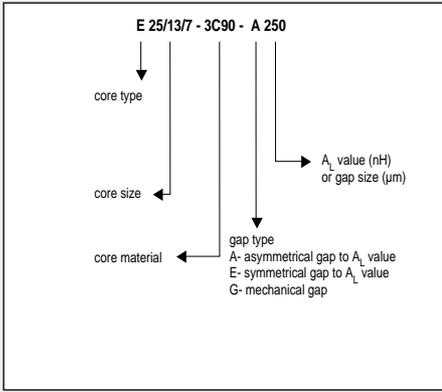




Core type (old core description)		E19/8/5 (813E187)	E19/8/9 (813E343)	E20/10/5	E20/10/6 (EF20)	E22/16/10	E25/10/6 (812E250)	E25/13/7 (EF25)	E25/13/11	E30/15/7
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	1.77	0.960	1.37	1.45	0.695	1.24	1.11	0.733	1.12
	eff. volume $V_e (\text{mm}^3)$	900	1650	1340	1490	5143	1930	2990	4500	4000
	eff. length $l_e (\text{mm})$	39.9	39.9	42.8	46.0	59.8	49.0	58.5	57.5	67.0
	eff. area $A_e (\text{mm}^2)$	22.6	41.3	31.2	32.0	86	39.5	52.0	78.4	60.0
	min. area $A_{\text{min}} (\text{mm}^2)$	22.1	41.1	25.2	32.0	80	37.0	52.0	78.4	49.0
	mass of core half (g)	≈ 2.3	≈ 4	≈ 4	≈ 3.7	≈ 14	≈ 4.8	≈ 8	≈ 11	≈ 11
dimensions (mm)	A	19.1 ± 0.4	19.05 ± 0.38	20.7-1.1	20+0.8/-0.6	22 ± 0.5	25.4 ± 0.6	25 + 0.8/-0.7	25 + 0.8/-0.7	30.8 – 1.4
	B	8.1 ± 0.13	8.05 ± 0.13	10 ± 0.2	10.2 – 0.4	15.75 ± 0.5	9.65 ± 0.2	12.8 – 0.5	12.8 – 0.5	15 ± 0.2
	C	4.7 ± 0.13	8.71 ± 0.13	5.3 – 0.4	5.9 – 0.5	10 ± 0.25	6.35 ± 0.25	7.5 – 0.5	11 – 0.5	7.3 – 0.5
	D	5.7 ± 0.13	5.69 ± 0.13	6.3 + 0.4	7 + 0.4	9.75 ± 0.25	6.4 min	8.7 + 0.5	8.7 + 0.5	9.7 + 0.5
	E	14.3 ± 0.3	14.33 ± 0.3	12.8 + 0.8	14.1 + 0.8	13 min	18.8 min	17.5 + 1.0	17.5 + 1.0	19.5 + 1.0
	F	4.7 ± 0.13	4.75 ± 0.13	5.2 – 0.4	5.9 – 0.4	8 ± 0.25	6.35 ± 0.25	7.5 ± 0.5	7.5 ± 0.5	7.2 - 0.5
coil formers	CP	1S	1S	1S			1S			1S
	CPH	1S - 8PD		1S - 8P	1S - 8P		1S - 10P	1S - 10P		
	CPCI				1S - 5P					
	CPCO				1S - 5P					
	CPHS									
	CPV			1S - 6P				1S - 6P		
	CSH			1S - 8P						1S - 10P
mounting parts	CLM						■			
	CLA			■						■
	CLI							■		
	SPR			■						■

# E cores

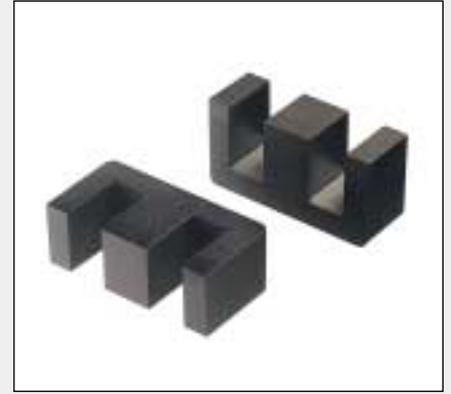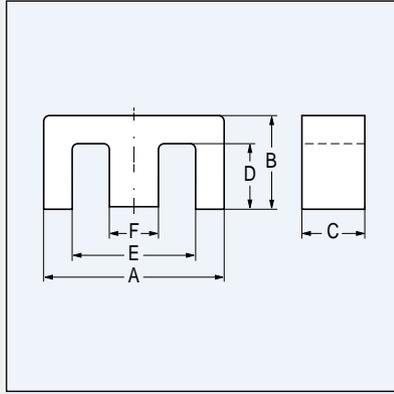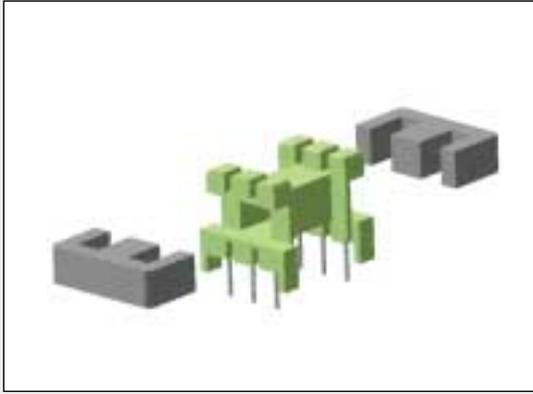

Core type (old core description)		E31/13/9	E32/16/9 (EF32)	E34/14/9 (E375)	E36/21/12	E41/17/12 (E21)	E42/21/15	E42/21/20	E42/33/20
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-4})$	0.740	0.894	0.850	0.762	0.517	0.548	0.417	0.614
	eff. volume $V_e(\text{mm}^3)$	5150	6180	5590	12160	11500	17300	22700	34200
	eff. length $l_e(\text{mm})$	61.9	74	69.3	96	77.0	97.0	97.0	145
	eff. area $A_e(\text{mm}^2)$	83.2	83	80.7	126	149	178	233	236
	min. area $A_{\min}(\text{mm}^2)$	83.2	83	80.7	121	142	175	233	234
	mass of core half (g)	≈ 13	≈ 16	≈ 14	≈ 31	≈ 30	≈ 44	≈ 56	≈ 82
dimensions (mm)	A	30.9 ± 0.5	32 + 0.9/-0.7	34.3 ± 0.6	36 ± 0.7	40.6 ± 0.65	43 - 1.7	43 - 1.7	42 + 1/- 0.7
	B	13.4 ± 0.15	16.4 - 0.4	14.1 ± 0.15	21.75 - 0.4	16.6 ± 0.2	21 ± 0.2	21 ± 0.2	32.8 - 0.4
	C	9.4 ± 0.3	9.5 - 0.7	9.3 ± 0.25	12 - 0.6	12.4 ± 0.3	15.2 - 0.6	20 - 0.8	20 - 0.8
	D	8.6 min	11.2 + 0.6	9.8 ± 0.13	15.75 + 0.6	10.4 min	14.8 + 0.6	14.8 + 0.6	26 + 1
	E	21.9 min	22.7 + 1.2	25.5 min	24.5 + 1.2	28.6 min	29.5 + 1.4	29.5 + 1.4	29.5 + 1.4
	F	9.4 ± 0.25	9.5 - 0.6	9.3 ± 0.2	10.2 - 0.5	12.45 ± 0.25	12.2 - 0.5	12.2 - 0.5	12.2 - 0.5
coil formers	CP			1S		1S	1S	1S	
	CPH		1S - 12P	1S - 12PD		1S - 12PD	1S-10PD-A 1S-10P	1S - 12PD	
	CPHS								
	CPV								
	CSH								
mounting parts	CLM								
	CLA						■		
	CLI								
	SPR						■		

# E cores

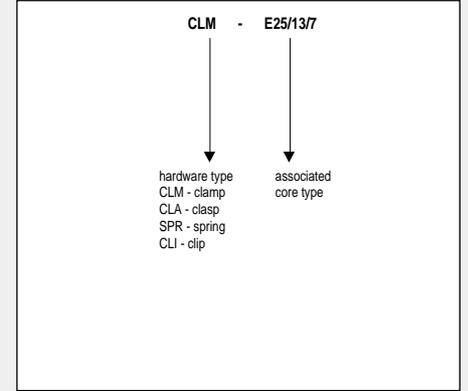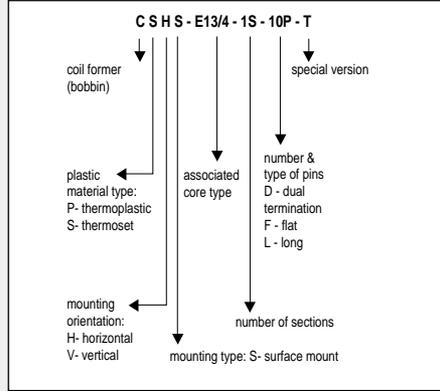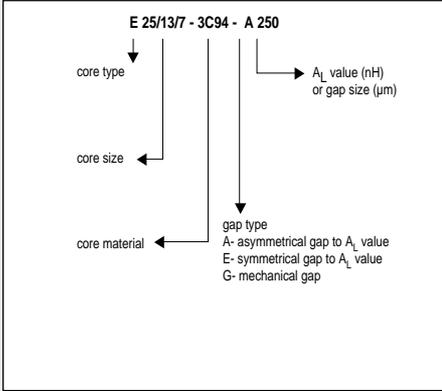

Core type (old core description)		E47/20/16	E50/27/15	E55/28/21	E55/28/25	E56/24/19 (E75)	E65/32/27	E71/33/32	E80/38/20
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	0.380	0.530	0.350	0.239	0.320	0.274	0.218	0.470
	eff. volume $V_e(\text{mm}^3)$	20800	26900	44000	52000	36000	79000	102000	72300
	eff. length $l_e(\text{mm})$	88.9	120	124	123	107	147	149	184
	eff. area $A_e(\text{mm}^2)$	234	225	353	420	337	540	683	392
	min. area $A_{\text{min}}(\text{mm}^2)$	226	213	345	411	337	530	676	392
	mass of core half (g)	≈ 53	≈ 68	≈ 108	≈ 130	≈ 90	≈ 205	≈ 260	≈ 180
dimensions (mm)	A	46.9 ± 0.8	50 ± 1	56.2 - 2.1	56.2 - 2.1	56.1 ± 1	65.0+1.5/-1.2	70.5 ± 1	80 ± 1.6
	B	19.6 ± 0.2	27.2 ± 0.2	27.5 ± 0.3	27.5 ± 0.3	23.6 ± 0.25	32.8 - 0.6	33.2 - 0.5	38.1 ± 0.3
	C	15.6 ± 0.25	14.6 ± 0.4	21.0 - 0.8	25 - 0.8	18.8 ± 0.25	27.4 - 0.8	32 - 0.8	19.8 ± 0.4
	D	12.1 min	18.6 ± 0.13	18.5 + 0.8	18.5 + 0.8	14.6 ± 0.13	22.2 + 0.8	21.9 + 0.7	28.2 ± 0.3
	E	32.4 ± 0.65	34.1 min	37.5 + 1.5	37.5 + 1.5	38.1 min	44.2 + 1.8	48 + 1.5	59.1 min
	F	15.6 ± 0.25	14.6 ± 0.4	17.2 - 0.5	17.2 - 0.5	18.8 ± 0.25	20 - 0.7	22 - 0.7	19.8 ± 0.4
coil formers	CP	1S		1S - A 1S		1S	1S		
	CPH	1S - 12PD		1S - 14P		1S - 12PD			
	CPHS								
	CPV								
	CSH								
mounting parts	CLM								
	CLA			■			■		
	CLI								
	SPR			■			■		

# E cores

Core type (old core description)		E5.3/2.7/2	E6.3/2.9/2	E8.8/4.1/2	E13/6/3	E13/6/6 (814E250)	E13/7/4 (EF12.6)	E16/8/5 (EF16)	E19/8/5 (813E187)	E19/8/9 (813E343)
core HALVES for general purpose transformers and power applications	3C81					A63 A100 A160 A250 A315 1950			E63 E100 A160 A250 A315 1500	E63 E100 A160 A250 A315 2740
	3C90				A63 A100 A160 A250 A315 730	A63 A100 A160 A250 A315 1470	A63 A100 A160 A250 A315 800	A63 A100 A160 A250 A315 1100	E63 E100 A160 A250 A315 1170	E63 E100 A160 A250 A315 2150
	3C94	300 <b>des</b>	400 <b>des</b>	530 <b>prot</b>		1470	800	1100	1170	2150
	3C96	275 <b>prot</b>	380 <b>prot</b>	480 <b>prot</b>		1250 <b>prot</b>	700 <b>prot</b>	980 <b>prot</b>	995 <b>prot</b>	1830 <b>prot</b>
	3F3	265	360	460 <b>prot</b>		A63 A100 A160 A250 A315 1250 <b>des</b>	A63 A100 A160 A250 A315 700	A63 A100 A160 A250 A315 980	E63 E100 A160 A250 A315 995 <b>des</b>	E63 E100 A160 A250 A315 1830 <b>des</b>
	3F35	225 <b>prot</b>	300 <b>prot</b>	380 <b>prot</b>		1000 <b>prot</b>	560 <b>prot</b>	760 <b>prot</b>	810 <b>prot</b>	1490 <b>prot</b>
	3F4	165 <b>des</b>	225 <b>des</b>	280 <b>prot</b>						
	3C11									
	3E1		700 <b>sup</b>					1200	1800	
	3E25					2600 <b>sup</b>	1500 <b>sup</b>	2200 <b>sup</b>	2300 <b>sup</b>	4250 <b>sup</b>
3E26										
3E27				1300	2600	1500	2200	2300	4250	
3E5	1400	1700								
3E6	1600	2100	2500 <b>prot</b>							

- E63 — gapped core half with symmetrical gap (E).  $A_L = 63$  nH measured in combination with an Equal-gapped core half.
- A315 — gapped core half with asymmetrical gap (A).  $A_L = 315$  nH measured in combination with a non-gapped core half.
- 1950 — ungapped core half.  $A_L = 1950$  nH measured in combination with another ungapped core half.

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance:

$\pm 5\%$	$\pm 8\%$	$\pm 10\%$	$\pm 15\%$	$\pm 20\%$	$\pm 25\%$	$+30\%$ $-20\%$	$+40\%$ $-30\%$
-----------	-----------	------------	------------	------------	------------	--------------------	--------------------

Core type (old core description)		E20/10/5	E20/10/6 (EF20)	E22/16/10	E25/10/6	E25/13/7 (EF25)	E25/13/11	E30/15/7	E31/13/9	
core HALVES for general purpose transformers and power applications	3C81				E63 A100 A160 A250 A315 2340	E63 A100 A160 A250 A315 2460		E100 A160 A250 A315 A400 A630 2500	E100 E160 A250 A315 A400 A630 3735	
	3C90	A63 A100 A160 A250 A315 1500	A63 A100 A160 A250 A315 1450	A63 A100 A160 A250 A315 3090	E63 A100 A160 A250 A315 1600	E63 A100 A160 A250 A315 1900	E63 E100 A160 A250 A315 2800	E100 A160 A250 A315 A400 A630 1900	E100 E160 A250 A315 A400 A630 2970	
	3C94	1500 <b>des</b>	1380 <b>des</b>		1600 <b>des</b>	1900 <b>des</b>	2800 <b>des</b>	2000 <b>des</b>	2970	
	3C96	1400 <b>prot</b>	1350 <b>prot</b>		1470 <b>prot</b>	1650 <b>prot</b>	2700 <b>prot</b>	1600 <b>prot</b>	2650 <b>prot</b>	
	3F3	A63 A100 A160 A250 A315 1400	A63 A100 A160 A250 A315 1350		E63 A100 A160 A250 A315 1470	E63 A100 A160 A250 A315 1650	E63 E100 A160 A250 A315 2700	E100 A160 A250 A315 A400 A630 1600	E100 A160 A250 A315 A400 A630 2650	
	3F35	1060 <b>prot</b>	1000 <b>prot</b>		1150 <b>prot</b>	1250 <b>prot</b>	2000 <b>prot</b>	1250 <b>prot</b>	1950 <b>prot</b>	
	3F4									
	high- $\mu$ HALVES	3C11	2600	2600		2600	3100		3300	
	3E25	2800 <b>des</b>	2700 <b>des</b>		3000 <b>des</b>	4000		4100 <b>sup</b>	6790 <b>sup</b>	
	3E26									
3E27	2800	2700		3200	4000		4100	6790		

E63 — gapped core half with symmetrical gap (E).  $A_L = 63$  nH measured in combination with an Equal-gapped core half.  
 A315 — gapped core half with asymmetrical gap (A).  $A_L = 315$  nH measured in combination with a non-gapped core half.  
 1350 — ungapped core half.  $A_L = 1350$  nH measured in combination with another ungapped core half.

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 5% ± 8% ± 10% ± 15% ± 20% ± 25% + 30%  
- 20% + 40%  
- 30%

# E cores

Core type (old core description)	E32/16/9 (EF32)	E34/14/9 (E375)	E35/18/10	E36/21/12	E41/17/12	E42/21/15	E42/21/20	E42/33/20	
core HALVES for general purpose transformers and power applications	3C81		E100 E160 A250 A315 A400 A630 3200			E100 E160 E250 A315 A400 A630 5370	E100 E160 E250 A315 A400 A630 5300	E100 E160 E250 E315 A400 A630 6950	
	3C90	E100 E160 A250 A315 A400 A630 2500	E100 E160 A250 A315 A400 A630 2440	E100 E160 A250 A315 A400 A630 2500	E100 E160 A250 A315 A400 A630 2650	E100 E160 E250 A315 A400 A630 4100	E100 E160 E250 A315 A400 A630 3900	E100 E160 E250 A315 A400 A630 5000	E100 E160 E250 A315 A400 A630 4000
	3C94	2500 <b>des</b>	2440			4100 <b>des</b>	4100 <b>des</b>	5200 <b>des</b>	4000 <b>des</b>
	3C96	2300 <b>prot</b>	2125 <b>prot</b>						
	3F3	E100 E160 A250 A315 A400 A630 2300	E100 E160 A250 A315 A400 A630 2125			E100 E160 E250 A315 A400 A630 3575	E100 E160 E250 A315 A400 A630 3600	E100 E160 E250 E315 A400 A630 4600	E100 E160 E250 A315 A400 A630 3700
	3F35	1700 <b>prot</b>	1680 <b>prot</b>						
	3F4								
	3C11	4000					8000		
	3E25	5000 <b>des</b>	4695 <b>sup</b>			9400 <b>sup</b>	8000 <b>sup</b>	10500 <b>sup</b>	
	3E27	5000	4695			9400	8000	10500	
high $\mu$ HALVES									

- E63 — gapped core half with symmetrical gap (E).  $A_L = 63$  nH measured in combination with an Equal-gapped core half.
- A315 — gapped core half with asymmetrical gap (A).  $A_L = 315$  nH measured in combination with a non-gapped core half.
- 2200 — ungapped core half.  $A_L = 2200$  nH measured in combination with another ungapped core half.

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 5% ± 8% ± 10% ± 15% ± 20% ± 25% + 30%  
- 20% + 40%  
- 30%



Core type (old core description)		E47/20/16	E50/27/15	E55/28/21	E55/28/25	E56/24/19 (E75)	E65/32/27	E71/33/32	E80/38/20
core HALVES for general purpose transformers and power applications	3C81	E100 E160 E250 E315 E400 A630 7540	E100 E160 E250 E315 E400 A630 5500	E100 E160 E250 E315 E400 E630 8625		E100 E160 E250 E315 E400 E630 9500			E100 E160 E250 E315 E400 E630 6730
	3C90	E100 E160 E250 E315 E400 A630 5500	E100 E160 E250 E315 E400 A630 4355	E100 E160 E250 E315 E400 E630 6300	E100 E160 E250 E315 E400 E630 8000	E100 E160 E250 E315 E400 E630 6900	E100 E160 E250 E315 E400 E630 8600	E100 E160 E250 E315 E400 E630 10800	E100 E160 E250 E315 E400 E630 5070
	3C94								
	3F3	E100 E160 E250 E315 E400 A630 5100		E100 E160 E250 E315 E400 E630 5700	E100 E160 E250 E315 E400 E630 7400		E100 E160 E250 E315 E400 E630 7300	E100 E160 E250 E315 E400 E630 10000	E100 E160 E250 E315 E400 E630 4590
	3F35								
	3F4								
	3C11			12800			16700		
	3E25	11475 <sup>sup</sup>		14000 <sup>des</sup>		14580 <sup>sup</sup>			
	3E27	11475		15400		14580			
	high $\mu$ HALVES								

- E63 — gapped core half with symmetrical gap (E).  $A_L = 63$  nH measured in combination with an Equal-gapped core half.
- A315 — gapped core half with asymmetrical gap (A).  $A_L = 315$  nH measured in combination with a non-gapped core half.
- 5100 — ungapped core half.  $A_L = 5100$  nH measured in combination with another ungapped core half.

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 5% ± 8% ± 10% ± 15% ± 20% ± 25% + 30%  
- 20% + 40%  
- 30%

# EFD cores

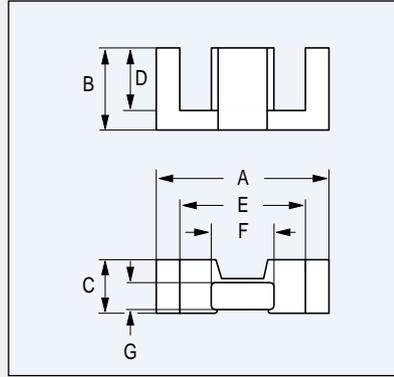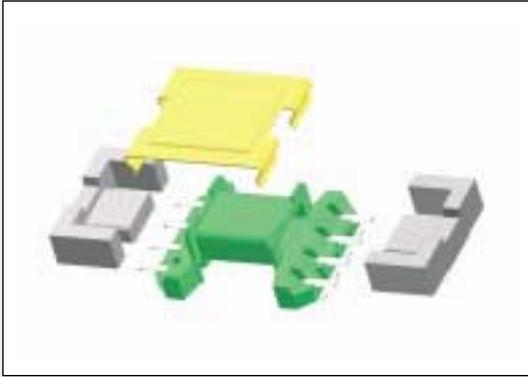

Economic Flat Design (EFD) power transformer cores offer a significant advance in circuit miniaturization. Their low build height and high throughput power-density make them ideally suited to applications where space is at a premium.

Throughput power of a ferrite core transformer is essentially proportional to its volume. So the transformer is one of the main limitations in a DC-DC converter's size. Now, with the introduction of the EFD system, a significant reduction in transformer core height has been achieved.

EFD transformer cores combine both extreme flatness with a very high throughput power-density for frequencies up to 1 MHz and higher.

Every transformer, based on the EFD range, has a lower building height than any other existing low-profile design with the same magnetic volume. This is achieved by placing the centre pole of the core always in the centre of the finished transformer, thus making maximum use of the winding area.



**Summary:**

- ◆ very low build height
- ◆ very high throughput power density
- ◆ complete range of accessories including SMD coil formers
- ◆ available from several sources

Core type		EFD10	EFD12	EFD15	EFD20	EFD25	EFD30
effective core parameters	core factor $\Sigma l/A(\text{mm}^{-1})$	3.29	2.50	2.27	1.52	1.00	0.98
	eff. volume $V_e (\text{mm}^3)$	171	325	510	1460	3300	4700
	eff. length $l_e (\text{mm})$	23.7	28.5	34.0	47.0	57.0	68.0
	eff. area $A_e (\text{mm}^2)$	7.2	11.4	15.0	31.0	58.0	69.0
	min. area $A_{\text{min}} (\text{mm}^2)$	6.5	10.7	12.2	29.0	55.0	66.0
	mass of core half (g)	≈ 0.45	≈ 0.9	≈ 1.4	≈ 3.5	≈ 8	≈ 12
dimensions (mm)	A	10.5 ± 0.3	12.5 ± 0.3	15 ± 0.4	20 ± 0.55	25 ± 0.65	30 ± 0.8
	B	5.2 ± 0.1	6.2 ± 0.1	7.5 ± 0.15	10 ± 0.15	12.5 ± 0.15	15 ± 0.15
	C	2.7 ± 0.1	3.5 ± 0.1	4.65 ± 0.15	6.65 ± 0.15	9.1 ± 0.2	9.1 ± 0.2
	D	3.75 ± 0.15	4.55 ± 0.15	5.5 ± 0.25	7.7 ± 0.25	9.3 ± 0.25	11.2 ± 0.3
	E	7.65 ± 0.25	9 ± 0.25	11 ± 0.35	15.4 ± 0.5	18.7 ± 0.6	22.4 ± 0.75
	F	4.55 ± 0.15	5.4 ± 0.15	5.3 ± 0.15	8.9 ± 0.2	11.4 ± 0.2	14.6 ± 0.25
	G	1.45 ± 0.05	2 ± 0.1	2.4 ± 0.1	3.6 ± 0.15	5.2 ± 0.15	4.9 ± 0.15
coil formers	CPHS	1S - 8P	1S - 8P	1S - 8P 1S - 10P	1S-10P		
	CSHS		1S - 8P	1S - 8P	1S - 10P		
	CPH			1S - 8P	1S - 10P		
	CSH			1S - 8P	1S - 8P	1S - 10P	1S - 12P
mounting parts	CLI			■	■	■	■
	CLM	■	■	■	■		

Core type		EFD10 SETS	EFD12 SETS	EFD15 SETS	EFD20 HALVES	EFD25 HALVES	EFD30 HALVES	
cores for general purpose transformers and power applications	3C90	A25-S	A40-S	A63-S	E63	A160	A160	
		A40-S	A63-S	A100-S	A100	A250	A250	
		A63-S	A100-S	A160-S	A160	A315	A315	
		585-S	825-S	950-S	A250	A400	A400	
	3C94				A315	A630	A630	
					1300	2200	2100	
		des	A25-S	A40-S	A63-S	E63	A160	A160
			A40-S	A63-S	A100-S	A100	A250	A250
	A63-S		A100-S	A160-S	A160	A315	A315	
	585-S		825-S	950-S	A250	A400	A400	
	3C96 prot				A315	A630	A630	
					1300	2200	2100	
					1200	2000	1900	
	3F3	A25-S	A40-S	A63-S	E63	A160	A160	
		A40-S	A63-S	A100-S	A100	A250	A250	
		A63-S	A100-S	A160-S	A160	A315	A315	
		500-S	700-S	780-S	A250	A400	A400	
	3F35 prot				A315	A630	A630	
					1200	2000	1900	
3F4 des	400-S	550-S	630-S	920	1500	1450		
	A25-S	A40-S	A63-S	E63	E63	A160		
	A40-S	A63-S	A100-S	A100	A100	A250		
	A63-S	A100-S	A160-S	A160	A160	A315		
high $\mu$ cores	280-S	380-S	400-S	A250	A250	A400		
				A315	A315	A630		
				650	1000	1050		
3E4 des	1400-S	1900-S	2000-S					
	2000-S	2800-S	3600-S					
3E5 des								

E63-S — gapped core set with symmetrical gap (E).  $A_L = 63$  nH.  
 A315-S — gapped core set with asymmetrical gap (A).  $A_L = 315$  nH.  
 1200 — ungapped core half.  $A_L = 500$  nH measured in combination with another ungapped core half.

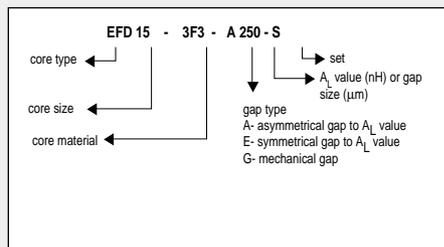
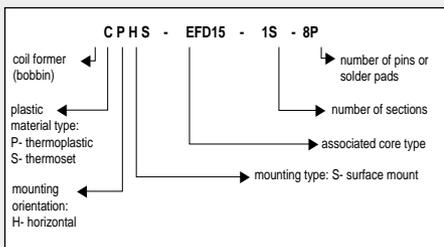


$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  
 $T = 25^\circ\text{C}$

$A_L$  tolerance:

$\pm 3\%$	$\pm 5\%$	$\pm 8\%$
$\pm 10\%$	$\pm 25\%$	$+40\%$ $-30\%$

# EP cores

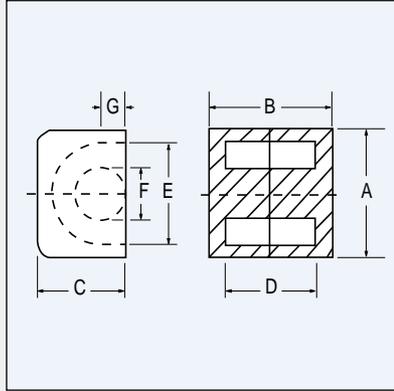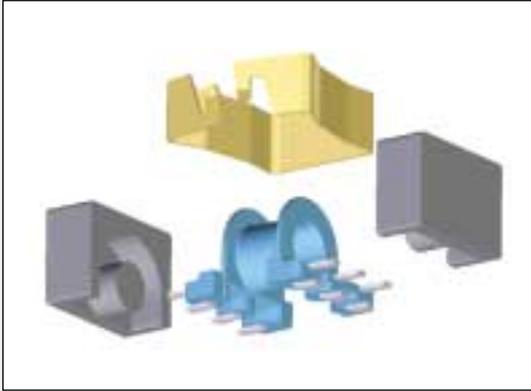

The EP core range was specially designed for wideband transformer applications. The shape of the assembly is almost cubical, allowing high packing densities on the PCB. The winding except the bottom is completely surrounded by ferrite. Shielding from neighbouring cores is therefore excellent. The bobbins have two rows of pins allowing easy design of multiple output transformers. Cores are available in high permeability materials for wide band transformers and in power materials for small power transformers.

**Summary:**

- ◆ cubical design for dense packing
- ◆ excellent magnetic shielding
- ◆ easy design of multiple output transformers

Core type		EP6	EP7	EP10	EP13	EP17	EP20
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	3.40	1.45	1.70	1.24	0.870	0.520
	eff. volume $V_e(\text{mm}^3)$	30.1	165	215	472	999	3230
	eff. length $l_e(\text{mm})$	10.1	15.5	19.3	24.2	29.5	41.1
	eff. area $A_e(\text{mm}^2)$	2.97	10.7	11.3	19.5	33.7	78.7
	min. area $A_{\text{min}}(\text{mm}^2)$	2.27	8.55	8.55	14.9	25.5	60.8
	mass of core set (g)	≈ 0.5	≈ 0.8	≈ 1.1	≈ 2.4	≈ 5	≈ 16
dimensions (mm)	A	6 ± 0.15	9.4 - 0.4	11.5 ± 0.3	12.8 - 0.6	18 ± 0.4	24 ± 0.5
	B	6 ± 0.1	7.5 - 0.2	10.2 ± 0.2	13 - 0.3	16.8 ± 0.2	21.4 ± 0.2
	C	3.8 ± 0.1	6.5 - 0.3	7.6 ± 0.2	9 - 0.4	11 ± 0.25	15 ± 0.35
	D	4.4 ± 0.15	5 + 0.4	7.85 - 0.4	9 + 0.4	11.4 ± 0.3	14.4 ± 0.3
	E	4.4 ± 0.15	7.2 + 0.4	9.4 ± 0.2	9.7 + 0.6	12 ± 0.4	16.5 ± 0.4
	F	1.7 ± 0.1	3.4 - 0.2	3.3 ± 0.15	4.5 - 0.3	5.7 ± 0.18	8.8 ± 0.25
	G	0.8 ± 0.1	1.7 ± 0.1	1.8 ± 0.13	2.4 ± 0.1	3.3 ± 0.2	4.5 ± 0.2
coil formers	CSH		1S - 4P 1S - 6P 1S - 6P - B 2S - 4P - TA 2S - 6P - T	1S - 8P 2S - 8P	1S - 10P 2S - 10P	1S - 8P 2S - 8P	1S - 10P 2S - 10P
	CSHS	1S - 6P	1S - 5P 1S - 6P	1S - 8P-T	1S - 10P-T		
	CPH			1S - 8P-T			
	CPHS		1S - 6P	1S - 8P-T 2S - 8P	1S - 10P		
mounting parts	CLI	■	■	■	■		
	CLI/P		■				
	CLA		■	■	■	■	■
	SPR		■	■	■	■	■



Core type	EP6 <small>prot</small>	EP7	EP10	EP13	EP17	EP20	
core SETS for general purpose transformers and power applications	3D3	A40	A40	A40	A63		
		A63	A63	A63	A100		
	A100	A100	A100	A160			
	530	530	470	670			
	3H3	A40	A40	A40	A63		
		A63	A63	A63	A100		
		A100	A100	A100	A160		
		A160	A160	A160			
		A250	A250				
	1120	1120	1025	1475			
	3C81	E25	E25	E25	E40	E63	E160
		A40	A40	A40	A63	A100	A250
		A63	A63	A63	A100	A160	A315
		A100	A100	A100	A160	A250	A400
		A160	A160	A160	A250	A315	A630
	≥ 875	≥ 875	≥ 900	≥ 1250	≥ 1950	≥ 3450	
	3C90	E25	E25	E25	E40	E63	E160
		A40	A40	A40	A63	A100	A250
		A63	A63	A63	A100	A160	A315
		A100	A100	A100	A160	A250	A400
A160		A160	A160	A250	A315	A630	
1200	1200	1140	1650	2485	4435		
3C91 <small>prot</small>	≥ 875	≥ 875	≥ 900	≥ 1250	≥ 1950	≥ 3450	
3C94 <small>des</small>	E25	E25	E25	E40	E63	E160	
	A40	A40	A40	A63	A100	A250	
	A63	A63	A63	A100	A160	A315	
	A100	A100	A100	A160	A250	A400	
	A160	A160	A160	A250	A315	A630	
1200	1200	1140	1650	2485	4435		
3C96 <small>prot</small>	1120	1120	1025	1475			
3F3	E25	E25	E25	E40	E63	E160	
	A40	A40	A40	A63	A100	A250	
	A63	A63	A63	A100	A160	A315	
	A100	A100	A100	A160	A250	A400	
	A160	A160	A160	A250	A315	A630	
1000	1000	1000	1325	2000	3550		
3F35 <small>prot</small>	850	850	800	1100			
3F4 <small>des</small>	A100	A100	A63	A160			
	A160	A160	A100	A250			
	600	600	A160	A315			
			560	780			
3E1		2100 <small>sup</small>	2000 <small>sup</small>	2600 <small>sup</small>			
3E27		≥ 2500	≥ 2500	≥ 3400	≥ 5300		
3E4			3200 <small>sup</small>	4400 <small>sup</small>		≥ 8700 <small>sup</small>	
3E5		5200	4800	7000	≥ 8000		
3E6	2100	5800	6900	8500		≥ 13500	
3E55 <small>prot</small>	E16			A100			
	A25			A160			
	A40			A250			
	A63			A400			
	1900			A630			
			7000				

E63 — gapped core set with  $A_L = 63$  nH, symmetrical gap (E).  
 A315 — gapped core set with  $A_L = 315$  nH, asymmetrical gap (A).  
 1200 — ungapped core set,  $A_L = 1200$  nH.


$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance:

- ± 3%
- ± 5%
- ± 8%
- ± 12%
- ± 15%
- ± 25%
- + 30%  
- 20%
- + 40%  
- 30%

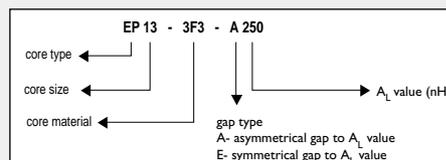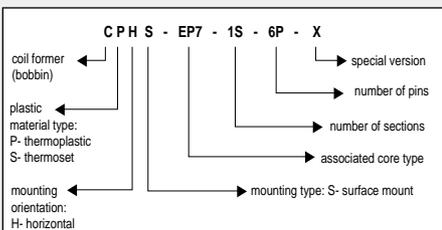

## EP/LP cores

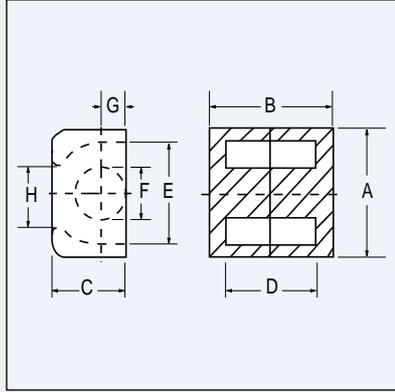

The EP/LP core range was specially designed for wideband transformer applications where low build height is a must. The board area occupied by the assembly is almost a square, allowing high packing densities on the PCB. The bobbins have two rows of pins allowing easy design of multiple output transformers. Cores are available in high permeability materials, including the new low THD material 3E55, for wide band transformers and in power materials for small power transformers.



### Summary:

- ◆ square design for dense packing
- ◆ lower build height than EP
- ◆ easy design of multiple output transformers

Core type		EP13/LP
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	1.42
	eff. volume $V_e (\text{mm}^3)$	501
	eff. length $l_e (\text{mm})$	26.7
	eff. area $A_e (\text{mm}^2)$	18.8
	min. area $A_{\text{min}} (\text{mm}^2)$	14.9
	mass of core set (g)	≈
dimensions (mm)	A	12.8 – 0.6
	B	13 – 0.3
	C	7.18 ± 0.2
	D	9 + 0.4
	E	9.7 + 0.6
	F	4.5 – 0.3
	G	2.4 ± 0.1
coil formers	CSH	1S - 10P 2S - 10P
	CSHS	1S - 10P-T
	CPH	
	CPHS	1S - 10P
mounting parts	CLI	■
	CL/P	
	CLA	■
	SPR	■

# EP/LP cores

Core type	EP13/LP
3D3	
3H3	
3C81	
3C90	
3C91 <b>prot</b>	
3C94 <b>des</b>	
3C96 <b>prot</b>	
3F3	
3F35 <b>prot</b>	
3F4 <b>des</b>	
3E1	
3E27	
3E4	
3E5	
3E6	
3E55 <b>prot</b>	A100
	A160
	A250
	A315
	A400
	A630
	6000

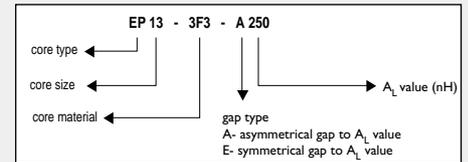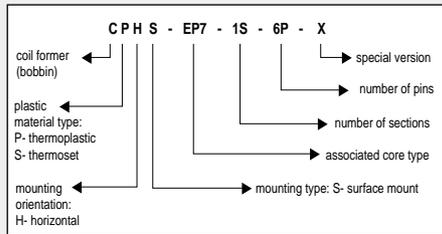

core SETS for general purpose transformers and power applications



- E63 — gapped core set with  $A_L = 63$  nH, symmetrical gap (E).
- A315 — gapped core set with  $A_L = 315$  nH, asymmetrical gap (A).
- 1200 — ungapped core set,  $A_L = 1200$  nH.

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance:

$\pm 3\%$	$\pm 5\%$	$\pm 8\%$	$\pm 10\%$	$\pm 12\%$
$\pm 15\%$	$\pm 25\%$	$+30\%$ $-20\%$	$+40\%$ $-30\%$	

# EQ cores

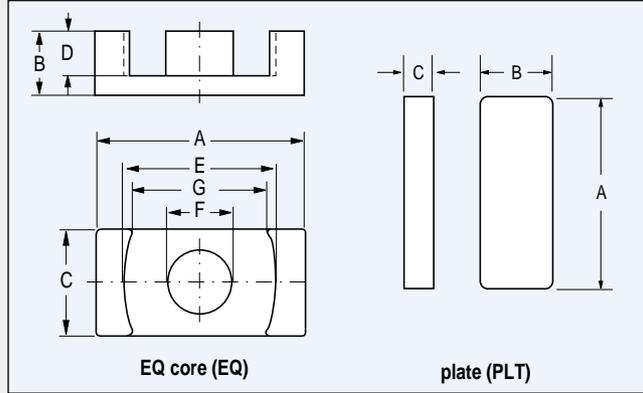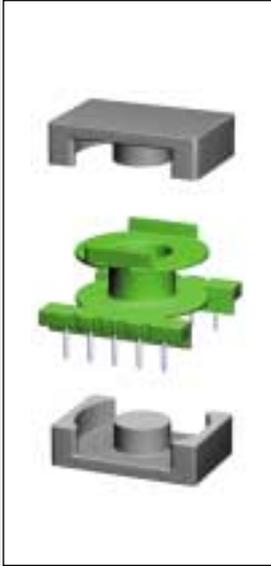



The EQ core design is derived from the ER and PQ. The range is optimized for use in compact AC/DC notebook adapters and DC/DC converters. For instance, the EQ30 has the capability to handle a power range of 50 to 70 W (flyback topology) in an enclosed casing of a notebook adapter or 100 to 150 W in low profile DC/DC converter . The advantages of EQ cores are a simple core shape, round centre pole, high  $A_e$  value , a large winding window, low profile and a large surface area for heat dissipation.

**Summary :**

- ◆ Simple core shape
- ◆ Round centre pole
- ◆ High  $A_e$  value
- ◆ Large winding window
- ◆ Low profile
- ◆ Large surface area for heat dissipation

Core type		EQ13	PLT13/9/1 (EQ/PLT combination)	EQ20/R <sup>1)</sup>	PLT20/14/2/S <sup>2)</sup> (EQ/PLT combination)
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	0.911	0.803	0.563	0.420
	eff. volume $V_e (\text{mm}^3)$	348	315	1960	1500
	eff. length $l_e (\text{mm})$	17.5	15.9	33.2	25.1
	eff. area $A_e (\text{mm}^2)$	19.9	19.8	59	59.8
	min. area $A_{\text{min}} (\text{mm}^2)$	19.2	19.2	55	55
	mass of core set (g)	≈ 0.9	≈ 0.6	≈ 5.5	≈ 3
dimensions (mm)	A	12.8 ± 0.3	12.8 ± 0.3	20 ± 0.35	20 ± 0.35
	B	2.85 ± 0.075	8.7 ± 0.25	6.3 ± 0.1	14 ± 0.3
	C	8.7 ± 0.25	1.1 ± 0.1	14 ± 0.3	2.3 ± 0.05
	D	1.75 ± 0.125	-	4.1 ± 0.15	-
	E	11.2 ± 0.3	-	18 ± 0.35	-
	F	5 ± 0.15	-	8.8 ± 0.15	-
	G	9.05 ± 0.3	-	12.86 ± 0.35	-
coil formers	CSV				

1) Core has clip recesses  
 2) Plate has a slot to accommodate a mounting clip. (Similar to Planar E cores with recess.)

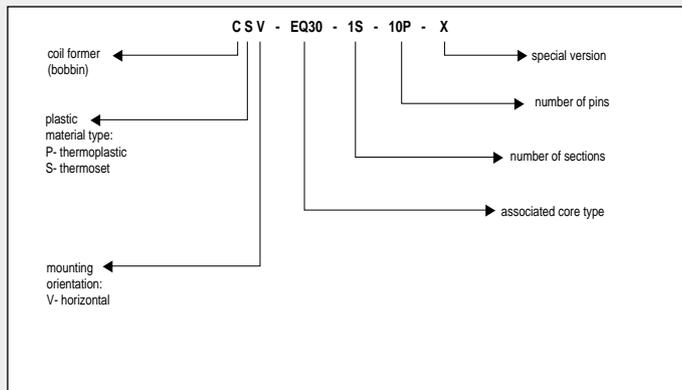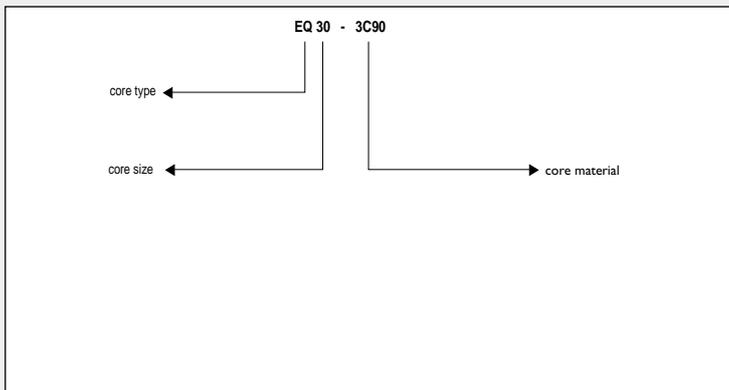

Core type		EQ25	EQ25/LP	PLT25/18/2 (EQ/LP/PLT combination)	EQ30	PLT30/20/3 (EQ/PLT combination)
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	0.414	-	0.294	0.426	0.292
	eff. volume $V_e (\text{mm}^3)$	4145	-	2370	4970	3400
	eff. length $l_e (\text{mm})$	41.4	-	26.4	46	31.5
	eff. area $A_e (\text{mm}^2)$	100	-	89.7	108	108
	min. area $A_{\text{min}} (\text{mm}^2)$	95	-	82.8	95	95
	mass of core set (g)	≈ 12	≈ 8.5	≈ 5	≈ 13.5	≈ 8
dimensions (mm)	A	25 ± 0.4	25 ± 0.4	25 ± 0.4	30 ± 0.4	30 ± 0.4
	B	8 ± 0.1	5.6 ± 0.05	18 ± 0.3	8 ± 0.15	20 ± 0.3
	C	18 ± 0.3	18 ± 0.3	2.3 ± 0.05	20 ± 0.3	2.7 ± 0.1
	D	5.15 ± 0.15	3.2 ± 0.15	-	5.3 ± 0.2	-
	E	22 ± 0.4	22 ± 0.4	-	26 ± 0.4	-
	F	11 ± 0.2	11 ± 0.2	-	11 ± 0.2	-
	G	14.5 min	14.5 min	-	19.45 ± 0.4	-
coil formers	CSV				1S - 10P	

# EQ cores

Core type		EQ13	EQ13 + PLT13/9/1	EQ20/R	EQ20/R + PLT20/14/2/S	EQ25	EQ25/LP + PLT25/18/2	EQ30	EQ30 + PLT30/20/3
core HALVES for power applications	3C90	1700	1800						
	3C94 <b>des</b>	1700	1800	3500	4750	4800	6100	4300	6550
	3C96 <b>prot</b>	1600	1700	3150	4350	4400	5600	3900	6000
	3F3				4350		5600	3900	6000
	3F35 <b>prot</b>	1300	1350	2400	3300	3350	4350		



4300

ungapped core half,  $A_L = 4300$   
measured in combination with another  
ungapped core half

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance:  $\pm 25\%$

# ER cores

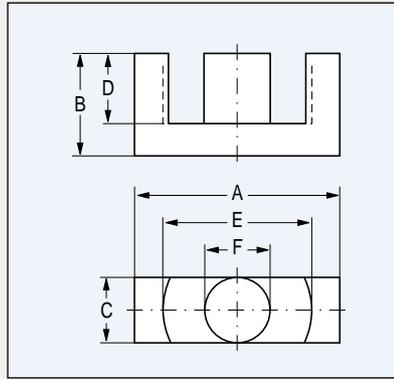
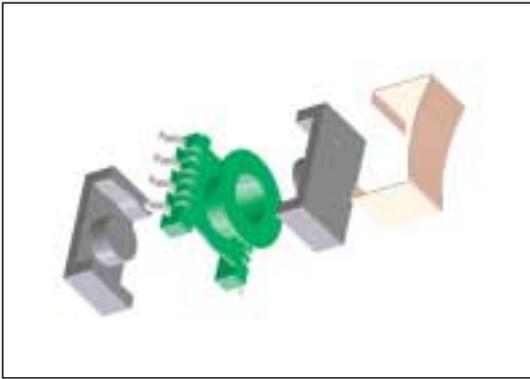


The ER core design is derived from the original E core and, like ETD and EC cores, has a round centre pole and outer legs with a radius to accommodate round coil formers. These cores are mainly used for power transformers. The round centre pole allows the use of thicker wires while the shorter turn length keeps the copper losses low. The smaller sizes, ER 9.5, ER11 and ER 14.5, are very suitable to build small SMD power and signal transformers. For both sizes matching SMD coil formers and clips are available.

**Summary:**

- ◆ round centre pole
- ◆ outer legs with a radius
- ◆ for the smaller sizes, SMD coilformers and clamps are available
- ◆ moderate shielding

Core type		ER9.5	ER11	ER14.5	ER28	ER28L	ER35
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	1.67	1.23	1.08	0.786	0.928	0.849
	eff. volume $V_e (\text{mm}^3)$	120	174	333	5260	6140	9710
	eff. length $l_e (\text{mm})$	14.2	14.7	19.0	64.0	75.5	90.8
	eff. area $A_e (\text{mm}^2)$	8.47	11.9	17.6	81.4	81.4	107
	min. area $A_{\text{min}} (\text{mm}^2)$	7.6	10.3	17.3	77.0	77.0	100
	mass of core half (g)	≈ 0.35	≈ 0.5	≈ 0.9	≈ 14	≈ 16	≈ 23
dimensions (mm)	A	9.5 – 0.3	11 – 0.35	14.5 ± 0.2	28.55 ± 0.55	28.55 ± 0.55	35 ± 0.65
	B	2.45 ± 0.05	2.45 ± 0.05	2.95 ± 0.05	14 ± 0.2	16.9 ± 0.25	20.7 ± 0.2
	C	5 – 0.2	6 – 0.2	6.8 – 0.2	11.4 ± 0.35	11.4 ± 0.35	11.4 ± 0.35
	D	1.6 + 0.15	1.5 + 0.15	1.55 + 0.2	9.75 ± 0.4	12.65 ± 0.4	14.75 ± 0.35
	E	7.5 + 0.25	8.7 + 0.3	11.8 ± 0.2	21.75 ± 0.5	21.75 ± 0.5	26.15 ± 0.55
	F	3.5 – 0.2	4.25 – 0.25	4.8 – 0.2	9.9 ± 0.25	9.9 ± 0.25	11.3 ± 0.25
coil formers	CPVS	1S - 8P	1S - 10P 1S - 12P	1S - 10P			
	CSVS		1S - 12P				
mounting parts	CLM	■	■	■			

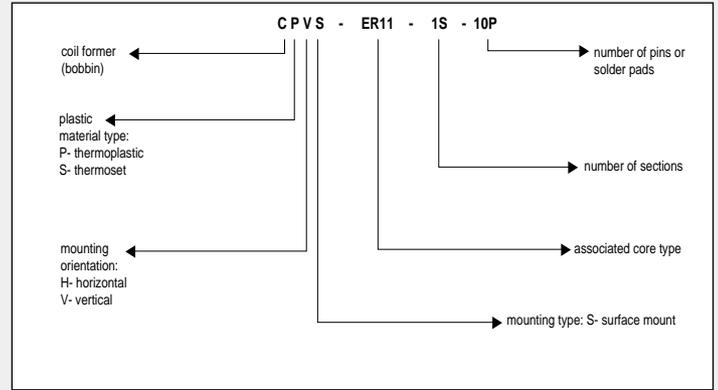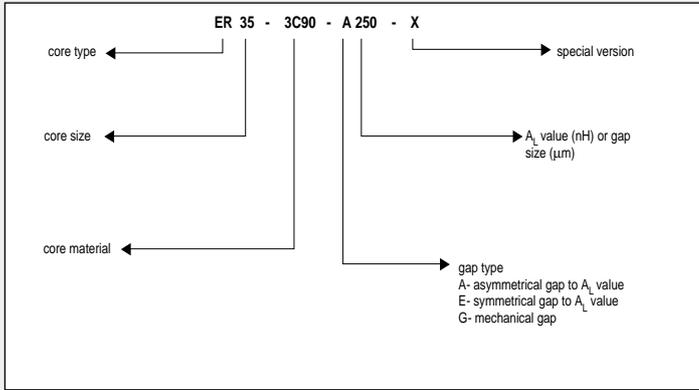

Core type		ER35W	ER40	ER42	ER42A	ER48	ER54
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	0.900	0.658	0.509	0.582	0.392	0.370
	eff. volume $V_e (\text{mm}^3)$	9548	14600	19200	16800	25500	23000
	eff. length $l_e (\text{mm})$	92.7	98	98.8	99	100	91.8
	eff. area $A_e (\text{mm}^2)$	103	149	194	170	255	250
	min. area $A_{\min} (\text{mm}^2)$	100	139	189	170	248	240
	mass of core half (g)	≈ 27	≈ 37	≈ 48	≈ 47	≈ 64	≈ 61
dimensions (mm)	A	35 ± 0.65	40 ± 0.7	42 ± 0.75	42 + 1.0 / - 0.7	48 ± 1	53.5 ± 1
	B	20.9 ± 0.2	22.4 ± 0.2	22.4 ± 0.2	21.8 ± 0.4	21.1 - 0.4	18.3 ± 0.2
	C	11.3 ± 0.35	13.4 ± 0.35	15.6 ± 0.4	15.6 ± 0.4	21 + 0.3 / -0.5	17.95 ± 0.35
	D	15 ± 0.2	15.45 ± 0.35	15.45 ± 0.35	15.6 + 0.7	14.7 + 0.7	11.1 ± 0.3
	E	27.1 ± 0.7	29.6 ± 0.6	30.05 ± 0.65	30.4 + 1.2	38 + 0.5 / - 0.8	40.65 ± 0.85
	F	11.3 ± 0.25	13.3 ± 0.25	15.5 ± 0.3	15 - 0.6	18 ± 0.3	17.9 ± 0.4
coil formers	CPVS						
mounting parts	CLM						


# ER cores

Core type		ER9.5 SETS <b>des</b>	ER11 SETS <b>des</b>	ER14.5 SETS <b>des</b>	ER28 HALVES	ER28L HALVES	ER35 HALVES	ER35W HALVES	ER40 HALVES	ER42 HALVES	ER42A HALVES	ER48 HALVES	ER54 HALVES	
cores for general purpose transformers and power applications	3C90				2900	2500	2800	3000	3600	4600	4000	5700	6100	
	3C94 <b>des</b>	A63-S	A100-S	A100-S	2900	2500	2800		3600	4600	4000	5700	6100	
		A100-S	A160-S	A160-S										
		A160-S	A250-S	A250-S										
		1000-S	1400-S	1650-S										
	3C96 <b>prot</b>	900	1250	1500										
	3F3	A63-S	A100-S	A100-S										
		A100-S	A160-S	A160-S										
		A160-S	A250-S	A250-S										
		850-S	1200-S	1400-S										
3F35 <b>prot</b>	700	1000	1150											
3F4 <b>des</b>	A40-S	A63-S	A100-S											
	A63-S	A100-S	A160-S											
	A100-S	A160-S	A250-S											
	525-S	725-S	850-S											
3E5	3600-S	5000-S												
3E6	4800-S	6700-S	7900-S											



2400 ——— ungapped core half,  $A_L = 2400$  nH measured in combination with another ungapped core half.  
 4800-S ——— ungapped core set,  $A_L = 4800$  nH.

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 3% ± 5% ± 8% ± 10% ± 25% + 40%  
- 30%

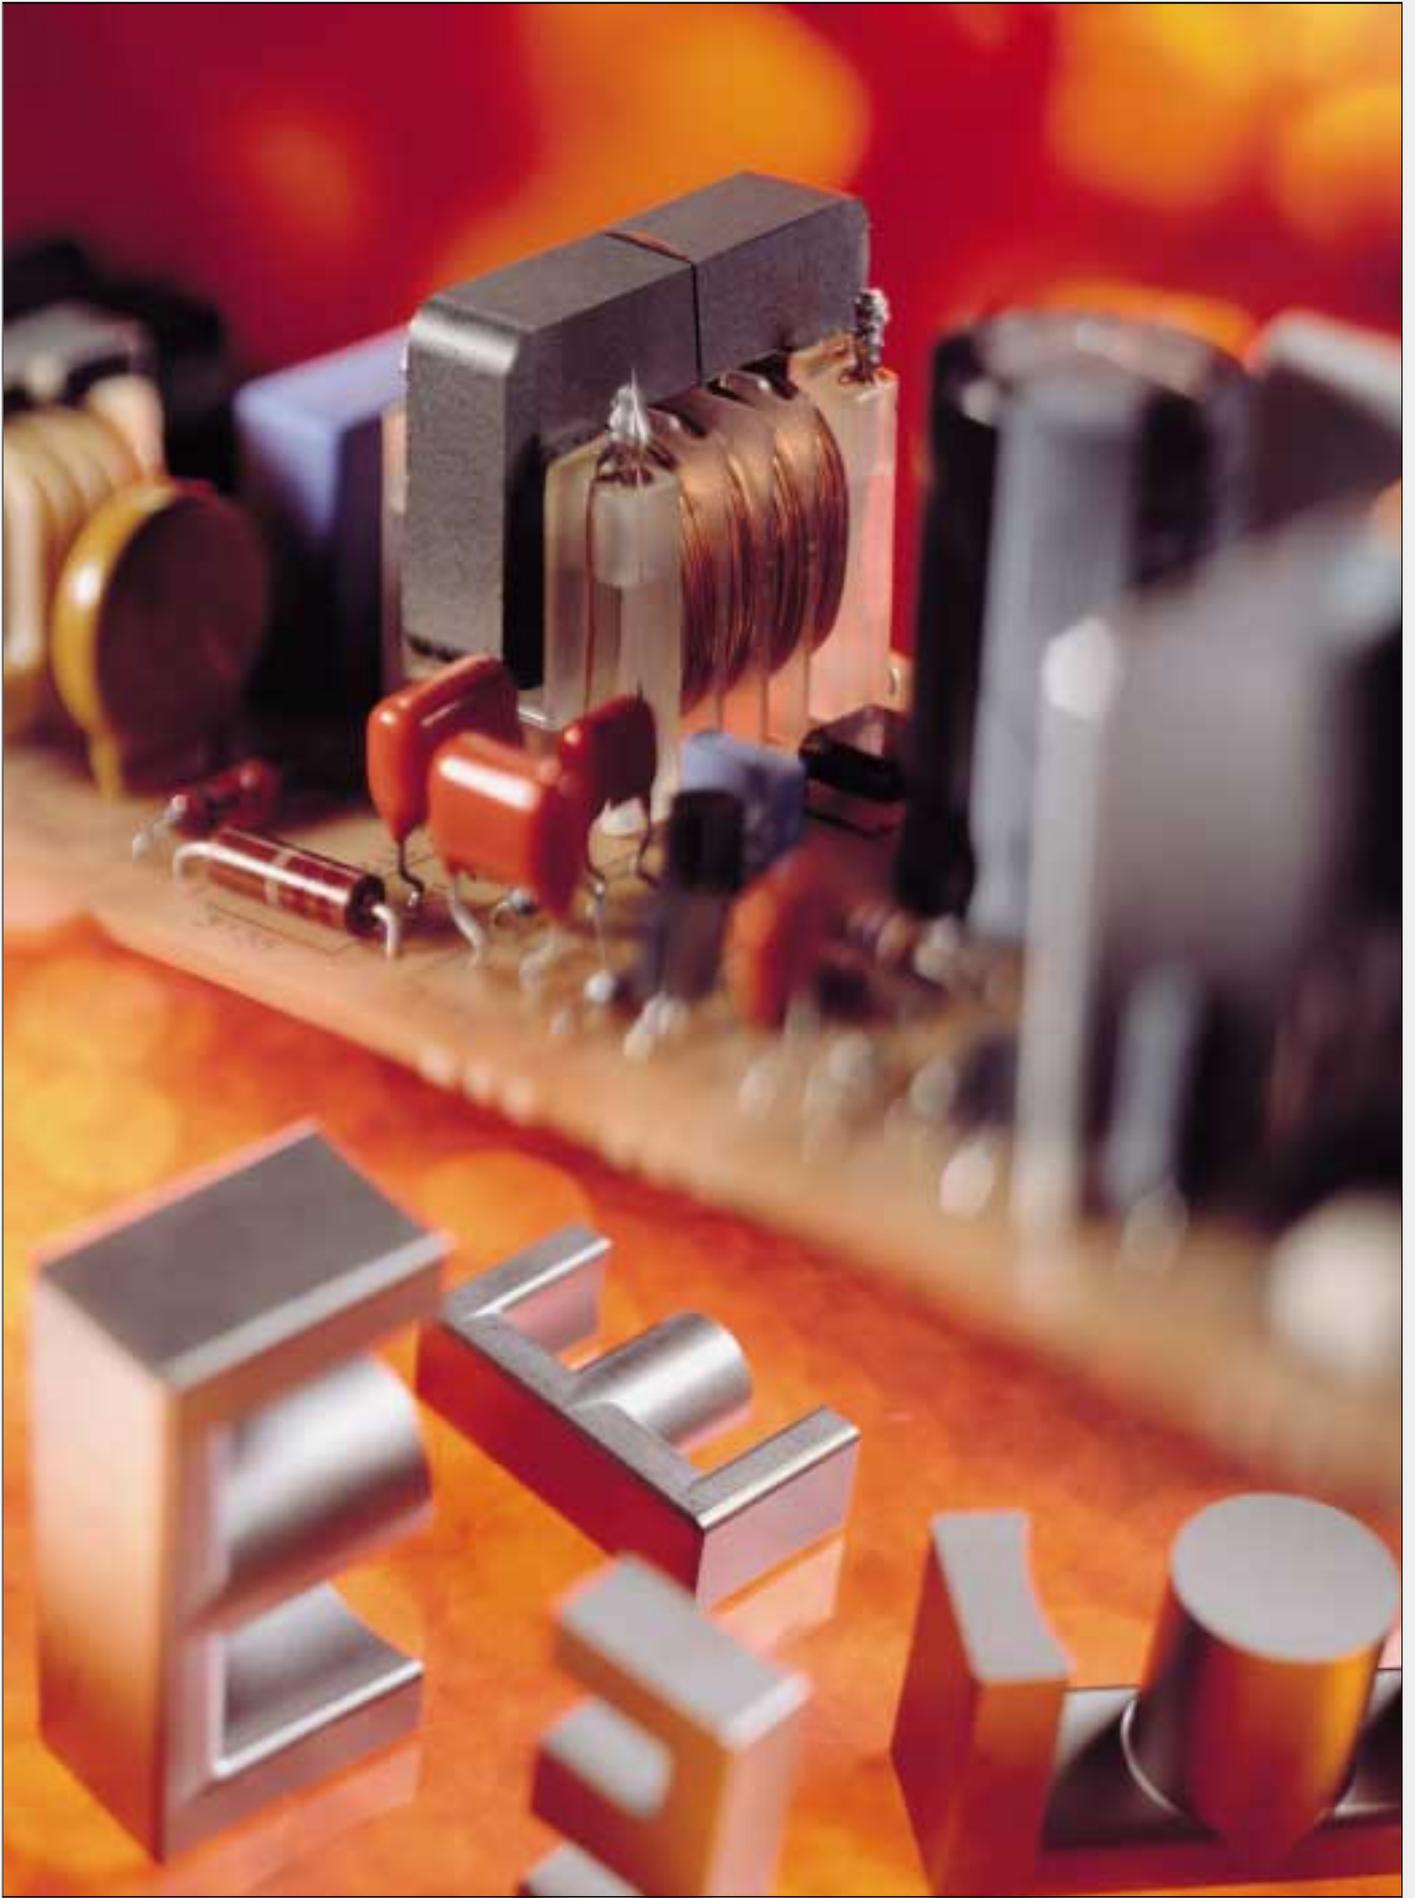

# ETD cores

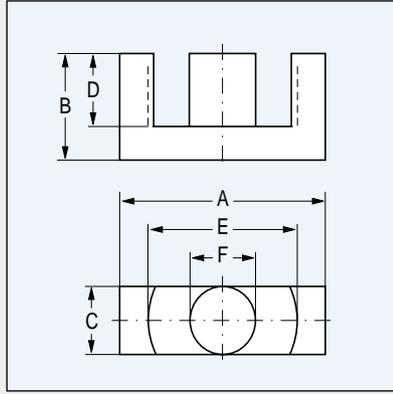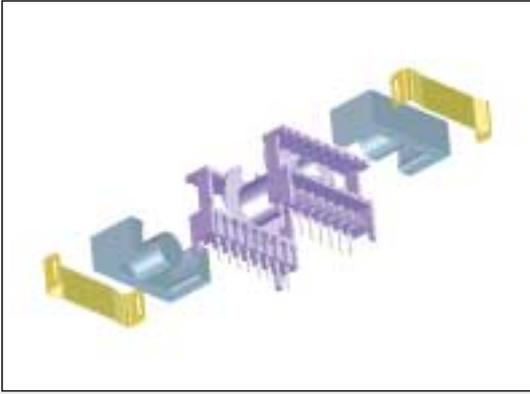

The ETD core design is a further development of E cores. They are optimized for use in SMPS transformers with switching frequencies between 50 and 200 kHz. The designation ETD (Economic Transformer Design) implies that this design achieves maximum throughput power related to volume and weight of the total transformer. Shielding is somewhat improved compared with E cores. The matching coil formers are suitable for many winding types and can be handled on automatic equipment. Clips are easy to mount and the range is available from several major suppliers.

**Summary:**

- ◆ optimized shape for AC/DC SMPS transformers up to 200 kHz
- ◆ lowest weight and volume for throughput power
- ◆ efficient mounting parts
- ◆ moderate shielding

Core type		ETD29	ETD34	ETD39	ETD44	ETD49	ETD54	ETD59
effective core parameters	core factor $\Sigma l/A(\text{mm}^{-1})$	0.947	0.810	0.737	0.589	0.534	0.454	0.378
	eff. volume $V_e (\text{mm}^3)$	5470	7640	11500	17800	24000	35500	51500
	eff. length $l_e (\text{mm})$	72	78.6	92.2	103	114	127	139
	eff. area $A_e (\text{mm}^2)$	76	97.1	125	173	211	280	368
	min. area $A_{\text{min}} (\text{mm}^2)$	71	91.6	123	172	209	280	368
	mass of core half (g)	≈ 14	≈ 20	≈ 30	≈ 47	≈ 62	≈ 90	≈ 130
dimensions (mm)	A	30.6 – 1.6	35 – 1.6	40 – 1.8	45 – 2	49.8 – 2.2	54.5 ± 1.3	59.8 ± 1.3
	B	15.8 ± 0.2	17.3 ± 0.2	19.8 ± 0.2	22.3 ± 0.2	24.7 ± 0.2	27.6 ± 0.2	31.0 ± 0.2
	C	9.8 – 0.6	11.1 – 0.6	12.8 – 0.6	15.2 – 0.6	16.7 – 0.6	18.9 ± 0.4	21.65 ± 0.45
	D	11 ± 0.3	11.8 + 0.6	14.2 + 0.8	16.1 + 0.8	17.7 + 0.8	20.2 ± 0.4	22.5 ± 0.4
	E	22 + 1.4	25.6 + 1.4	29.3 + 1.6	32.5 + 1.6	36.1 + 1.8	41.2 ± 1.1	44.7 ± 1.1
	F	9.8 – 0.6	11.1 – 0.6	12.8 – 0.6	15.2 – 0.6	16.7 – 0.6	18.9 ± 0.4	21.65 ± 0.45
coil formers	CPH	1S-13P	1S - 14P	1S - 16P	1S - 18P	1S - 20P	1S - 22P	1S - 24P
	CPV	1S-12P			1S-18P			
	CSV		1S-12P			1S-22P		
	CSCI		1S - 7P					
	CSCO		1S - 7P					
clips	CLI	■	■	■	■	■	■	■



Core type		ETD29	ETD34	ETD39	ETD44	ETD49	ETD54	ETD59
core HALVES for power applications	3C90	2350	2700	3000	3800	4200	5000	6000
	3C94 <b>des</b>	2350	2700					
	3C96 <b>prot</b>	2200	2500					
	3F3	2200	2500	2800	3500	3900	4600	5600
	3F35 <b>prot</b>	1600	1850					

2000



ungapped core half.  $A_L = 2000$  nH measured in combination with another ungapped core half.

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance:  $\pm 25\%$

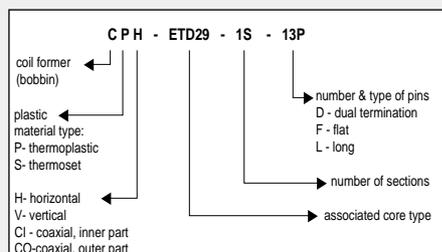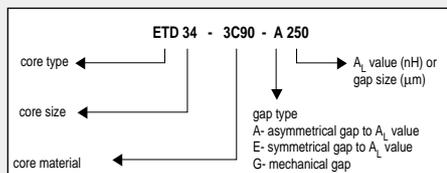

# Frame and Bar cores

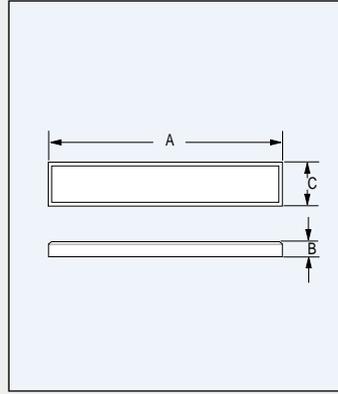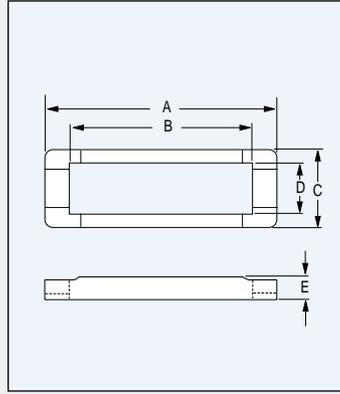

Cores with a design similar to Frame and Bar cores have been available from Philips under the name of H cores, since 1971. They were mainly applied as signal transformers in Telecom applications. The new Frame and Bar cores have been modified to a slim and elongated rectangular shape in order to meet the dimension requirements of a flat LCD panel. The elongated rectangular shape is also optimized to accommodate the large number of turns required to generate the high ignition voltage (1400 Vrms) for a backlight discharge lamp. Besides this, the Frame and Bar core is also easy to assemble into a transformer and has been adopted as a standard core for the LCD backlight inverter transformer. A backlight inverter is an electronic DC to AC circuit that drives a Cold Cathode Fluorescent Lamp (CCFL) for the backlighting of a notebook LCD display or LCD monitor.

Summary :

- ◆ Narrow design
- ◆ Easy to assemble
- ◆ Large winding space to accommodate a high number of turns


Core type		FRM 20/5/15	FRM 21/4/12	FRM 24/3.9/10	FRM 27/3.8/9	BAR 20/3/5.5	BAR 22/2/6	BAR 25/2.2/4	BAR 28/3.8/2.3
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	3.29	5.06	5.65	5.56	3.29	5.06	5.65	5.56
	eff. volume $V_e (\text{mm}^3)$	655	312	370	504	655	312	370	504
	eff. length $l_e (\text{mm})$	46	40	45.8	52.1	46	40	45.8	50
	eff. area $A_e (\text{mm}^2)$	14	7.9	8.1	9.7	14	7.9	8.1	9.0
	min. area $A_{\text{min}} (\text{mm}^2)$	7.4	5.7	6	8.7	7.4	5.7	6	8.7
	mass of core half (g)	≈ 2.1	≈ 1.5	≈ 1.3	≈ 1.6	≈ 1.5	≈ 1	≈ 1.2	≈ 1.2
dimensions (mm)	A	19.7 ± 0.3	21 ± 0.2	23.8 ± 0.3	26.7 ± 0.7	19.9 ± 0.3	21.8 ± 0.3	24.7 ± 0.3	28 ± 0.5
	B	15.6 ± 0.3	16.2 ± 0.3	19.2 ± 0.3	19.7 ± 0.6	2.85 ± 0.05	1.8 ± 0.1	2.15 ± 0.05	3.8 ± 0.1
	C	14.8 ± 0.3	11.8 ± 0.25	9.8 ± 0.2	9.0 ± 0.3	5.45 ± 0.15	5.5 ± 0.2	4.4 ± 0.2	2.3 ± 0.1
	D	11.4 ± 0.25	8.9 ± 0.2	7.3 ± 0.2	6.5 ± 0.2				
	E	4.6 ± 0.1	4.0 ± 0.1	3.85 ± 0.1	3.8 ± 0.2				
coil formers	CPHS	■	■	■	■				
mounting parts	COV	■							

Core type	FRM20/5/15	FRM21/4/12	FRM24/3.9/10	FRM27/3.8/9	
Matching cores	BAR20/3/5.5	BAR22/2/6	BAR25/2.2/4	BAR28/3.8/2.3	
core SETS for power applications	3C90	500	400	370	350
	3C91 	600	470	440	420


500 ——— ungapped core set.  $A_L = 500$

$A_L$  value (nH) measured at  $\dot{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance:  $\pm 25\%$

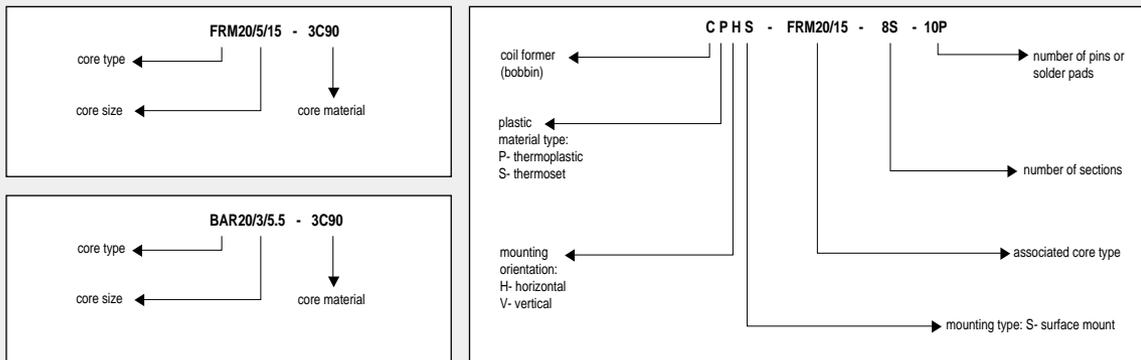

# P cores



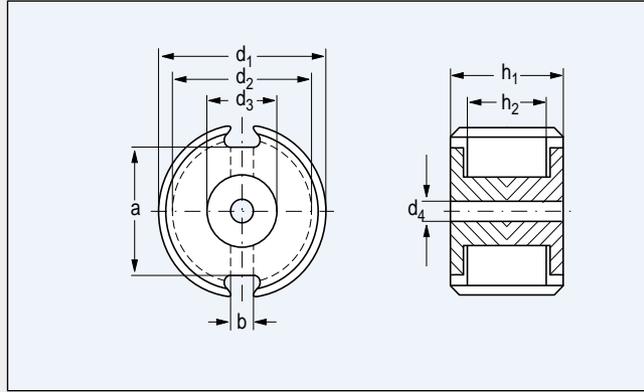


The P core is the earliest design for telecom filter inductors. As with RM-cores there is a complete, standardized range (IEC 133). The cores are available in a range of  $A_L$ -values from many suppliers. The core surrounds the winding almost completely so magnetic shielding is outstanding. The slots in the core are rather narrow which complicates assembly and mounting. A complete range of accessories is available, but most are not optimized for easy automatic handling.

**Summary:**

- ◆ excellent magnetic shielding
- ◆ complete range of sizes and material grades
- ◆ not easy to assemble and mount
- ◆ difficult to get leads out
- ◆ mains insulation difficult

Core type		P9/5	P11/7	P14/8	P18/11
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	1.24	0.956	0.789	0.597
	eff. volume $V_e (\text{mm}^3)$	126	251	495	1120
	eff. length $l_e (\text{mm})$	12.5	15.5	19.8	25.8
	eff. area $A_e (\text{mm}^2)$	10.1	16.2	25.1	43.3
	min. area $A_{\text{min}} (\text{mm}^2)$	7.9	13.2	19.8	36.0
	mass of core set (g)	≈ 0.8	≈ 1.8	≈ 3.2	≈ 6.0
	dimensions (mm)	a	6.5 ± 0.25	6.8 ± 0.25	9.5 ± 0.3
b		2 ± 0.2	2.2 ± 0.3	2.7 + 1.2	3.8 ± 0.6
d1		9.3 - 0.3	11.3 - 0.4	14.3 - 0.5	18.4 - 0.8
d2		7.5 + 0.25	9 + 0.4	11.6 + 0.4	14.9 + 0.5
d3		3.9 - 0.2	4.7 - 0.2	6 - 0.2	7.6 - 0.3
d4		2.1 ± 0.1	2.1 ± 0.1	3.1 ± 0.1	3.1 ± 0.1
h1		5.4 - 0.3	6.5 + 0.1 / - 0.2	8.4 + 0.1 / - 0.2	10.6 ± 0.1
coil formers	CP	1S	1S 2S - A 3S - A	1S 2S 3S - A	1S 2S 3S
	CPV			1S - 4SPD 1S - 4SPDL 2S - 4SPD 2S - 4SPDL 1S - 6PD 1S - 6PDL 2S - 6PD 2S - 6PDL	1S - 6PD 1S - 6PDL 2S - 6PD 2S - 6PDL 3S - 6PD 3S - 6PDL
mounting parts	TGP		4P	6P	8P
	CON		■	■	■
	SPR		■	■	■
	CLM/TP	■	■	■	■
	CLM/TS				
	WAS-CLM/TP			■	■
WAS-CLM/TS					

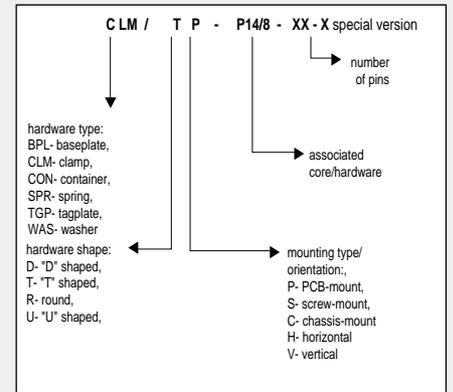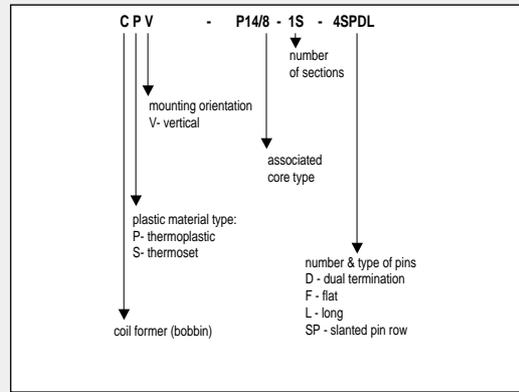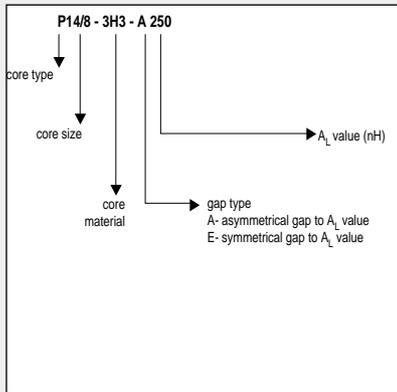

Core type		P22/13	P26/16
effective core parameters	core factor $\Sigma l/A(\text{mm}^{-1})$	0.497	0.400
	eff. volume $V_e (\text{mm}^3)$	2000	3530
	eff. length $l_e (\text{mm})$	31.5	37.6
	eff. area $A_e (\text{mm}^2)$	63.4	93.9
	min. area $A_{\min} (\text{mm}^2)$	50.9	77.4
	mass of core set (g)	≈ 12	≈ 20
dimensions (mm)	a	15 ± 0.4	18 ± 0.4
	b	3.8 ± 0.6	3.8 ± 0.6
	d1	22 - 0.8	25.5 ± 0.5
	d2	17.9 + 0.6	21.2 + 0.8
	d3	9.4 - 0.3	11.5 - 0.4
	d4	4.4 + 0.3	5.4 + 0.2
	h1	13.4 ± 0.2	16 ± 0.2
	h2	9.2 + 0.4	11 + 0.4
coil formers	CP	1S 2S 3S	1S 2S 3S
	CPV	1S - 6PD 1S - 6PDL 2S - 6PD 2S - 6PDL 3S - 6PD 3S - 6PDL	1S - 6PD 1S - 6PDL 2S - 6PD 2S - 6PDL 3S - 6PD 3S - 6PDL
	TGP	8P	8P
	CON	■	■
	SPR	■	■
	CLM/TP		■
mounting parts	CLM/TS	■	
	WAS-CLM/TP		
	WAS-CLM/TS	■	



# P cores

Core type		P9/5	P11/7	P14/8	P18/11	P22/13	P26/16
core SETS for signal filter applications	3D3 <sup>sup</sup>	E40	E16	E40	E63	E40	E100
		E63	E25	E63	E100	E63	E160
		630	E40	E100	E160	E100	E250
			E63	1000	1400	E160	2150
			A100			1700	
	3H3 <sup>sup</sup>		A160	A160	E160	E160	E160
			A250	A250	A250	E250	E250
			1650	A315	A315	A315	E315
				A400	A400	A400	E400
				2150	A630	A630	A630
high $\mu$ SETS	3E1 <sup>sup</sup>			3700	5400	6900	9000
	3E27			5750	7500	9250	12000
	3E4 <sup>sup</sup>		4100	5300	7550	9450	12100

E63	gapped core set with $A_L = 63$ nH, symmetrical gap (E).
A315	gapped core set with $A_L = 315$ nH, asymmetrical gap (A).
1960	ungapped core set, $A_L = 1960$ nH.

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 3% ± 5% ± 8% ± 10% ± 25% + 40%  
- 30%

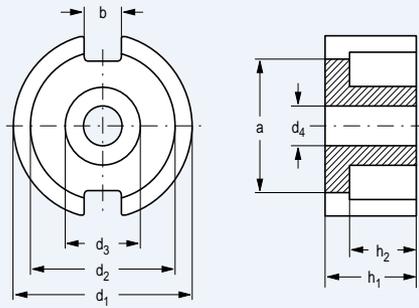


The PH core range consists of potcore halves specially designed for use in proximity switches. Their shape is derived from the IEC standard P-core range. Outside diameters are adapted to fit standardized sizes of proximity switch housings. Since the cores are used as halves, their height is increased to accommodate the winding. A complete range of coil formers is available.

**Summary:**

- ◆ range of standard sizes
- ◆ higher shape than normal
- ◆ P core halves to accommodate windings

Core type		PH5.6/3.6-3D3	PH7.4/3.9-3D3	PH9.4/4.8-3D3
dimensions (mm)	a	$4 \pm 0.2$	$5.7 \pm 0.4$	$6.5 \pm 0.3$
	b	$1.5 \pm 0.15$	$1.6 + 0.3$	$2 \pm 0.2$
	d1	$5.75 - 0.35$	$7.4 - 0.3$	$9.4 - 0.4$
	d2	$4.5 + 0.35$	$5.8 + 0.25$	$7.5 + 0.35$
	d3	$2.5 - 0.1$	$3 - 0.12$	$3.9 - 0.2$
	d4	$0.95 + 0.1$	$1.38 + 0.1$	$2 + 0.1$
	h1	$3.6 - 0.25$	$3.95 - 0.3$	$4.8 - 0.4$
	h2	$2.8 + 0.25$	$2.8 + 0.2$	$3.55 + 0.3$

# P/I cores

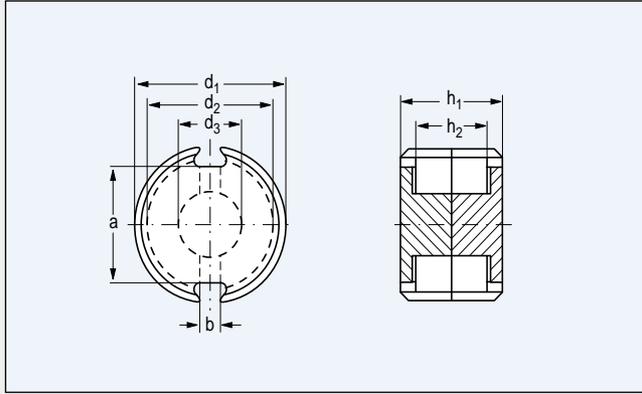


P cores with solid centre poles have approximately a 15% higher effective area than the corresponding P cores with central hole. This makes them more suitable for applications where high flux densities are used. This will be the case in power conversion where the P core is still popular mainly because of its excellent magnetic shielding. This helps to avoid EMI problems, especially at higher switching frequencies.

Core type		P11/7/I	P14/8/I	P18/11/I	P22/13/I	P26/16/I
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	0.860	0.700	0.560	0.450	0.360
	eff. volume $V_e (\text{mm}^3)$	309	628	1270	2460	4370
	eff. length $l_e (\text{mm})$	16.3	21.0	26.7	33.3	39.6
	eff. area $A_e (\text{mm}^2)$	19.0	29.9	47.5	73.4	110
	min. area $A_{\text{min}} (\text{mm}^2)$	13.7	23.6	37.4	58.1	87.0
	mass of core set (g)	≈ 1.9	≈ 3.5	≈ 7	≈ 13	≈ 21
dimensions (mm)	a	6.8 ± 0.25	9.5 ± 0.3	13.4 ± 0.3	15 ± 0.4	18 ± 0.4
	b	2.2 ± 0.3	3.3 ± 0.6	3.8 ± 0.6	3.8 ± 0.6	3.8 ± 0.6
	d1	11.1 ± 0.2	14.05 ± 0.25	17.9 ± 0.3	21.5 ± 0.3	25.5 ± 0.5
	d2	9.2 ± 0.2	11.8 ± 0.2	15.1 ± 0.25	18.2 ± 0.3	21.6 ± 0.4
	d3	4.6 ± 0.1	5.9 ± 0.1	7.4 ± 0.15	9.2 ± 0.15	11.3 ± 0.2
	h1	6.6 ± 0.15	8.4 ± 0.15	10.6 ± 0.15	13.4 ± 0.2	16.2 ± 0.2
	h2	4.6 ± 0.15	5.8 ± 0.2	7.4 ± 0.2	9.4 ± 0.2	11.2 ± 0.2

remark: for coil formers and mounting parts see P cores.

Core type		P11/7/I	P14/8/I	P18/11/I	P22/13/I	P26/16/I
core SETS for general purpose transformers and power applications	3C81	A63	A100	A160	A250	E250
		A100	A160	A250	A315	A315
		A160	A250	A315	A400	A400
		A250	A315	A400	A630	A630
		A315	A400	A630	A1000	A1000
		2100	2900	4200	5330	7000
	3C90	A63	A100	A160	A250	E250
		A100	A160	A250	A315	A315
		A160	A250	A315	A400	A400
		A250	A315	A400	A630	A630
		A315	A400	A630	A1000	A1000
		2010	2695	3660	4785	6230
	3C91 	2100	2900	4200	5330	7000
	3F3	A63	A100	A160	A250	E250
		A100	A160	A250	A315	A315
		A160	A250	A315	A400	A400
A250		A315	A400	A630	A630	
A315		A400	A630	A1000	A1000	
1750		2400	3110	4070	5250	


E63	gapped core set with $A_L = 63$ nH, symmetrical gap (E).
A315	gapped core set with $A_L = 315$ nH, asymmetrical gap (A).
2100	ungapped core set, $A_L = 2100$ nH.

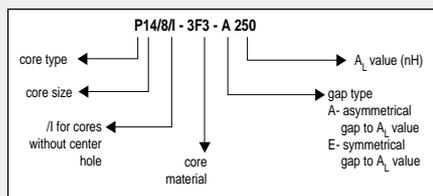

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 3% ± 5% ± 25%

# PT cores

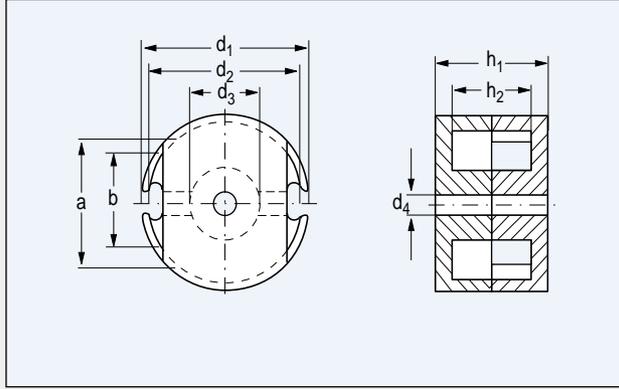

A disadvantage of the classical P core design has always been the narrow wire slots, making it difficult to make strong coil formers with integrated solder pins.

In the PT design this problem is solved by cutting away the sides of one core half. This creates ample room for wires and coil former flanges.

A range of special PT coil formers is available but also most standard P core accessories can be used.

- ◆ complete range of core sizes
- ◆ special coil formers with integrated pins
- ◆ also P core accessories can be used



Core type		PT14/8	PT18/11	PT23/11	PT23/18
effective core parameters	core factor $\Sigma l/A(\text{mm}^{-1})$	0.910	0.670	0.470	0.670
	eff. volume $V_e(\text{mm}^3)$	492	1110	1740	2590
	eff. length $l_e(\text{mm})$	21.1	27.2	28.6	41.6
	eff. area $A_e(\text{mm}^2)$	23.3	40.6	61.0	62.2
	min. area $A_{\text{min}}(\text{mm}^2)$	19.9	32.9	53.6	53.6
	mass of core set (g)	≈ 2.8	≈ 6	≈ 10.5	≈ 14
dimensions (mm)	a	9.4 ± 0.15	11.94 ± 0.2	15.2 ± 0.25	15.2 ± 0.25
	b	8.6 min	10.5 min	13.2 min	13.2 min
	d1	14.05 ± 0.25	18.0 ± 0.4	22.9 ± 0.45	22.9 ± 0.45
	d2	11.8 ± 0.2	15.15 ± 0.25	18.3 ± 0.35	18.3 ± 0.35
	d3	5.9 ± 0.1	7.4 ± 0.15	9.7 ± 0.2	9.7 ± 0.2
	d4	3.1 ± 0.075	3.1 ± 0.075	5.1 ± 0.1	5.1 ± 0.1
	h1	8.3 ± 0.15	10.6 ± 0.15	11 ± 0.25	18 ± 0.35
	h2	5.8 ± 0.2	7.4 ± 0.2	7.6 ± 0.25	14.4 ± 0.35
coil formers	CPV	1S - 6P		1S - 10P	1S - 10P
mounting parts	BPL/D-CLM/C	■			
	CLM/C	■			
	WAS-CLM/C	■			

Core type		PT14/8	PT18/11	PT23/11	PT23/18
core SETS for general purpose transformers and power applications	3C81	A63	A100	A160	A160
		A100	A160	A250	A250
		A160	A250	A315	A315
		A250	A315	A400	A400
		A315	A400	A630	A630
	2400	3130	5500	4100	
	3F3	A63	A100	A160	A160
		A100	A160	A250	A250
		A160	A250	A315	A315
		A250	A315	A400	A400
A315		A400	A630	A630	
1650	2505	3700	2750		
high $\mu$ SETS	3E27	4500	5760	8400	6400


- E63 — gapped core set with  $A_L = 63$  nH, symmetrical gap (E).  
A315 — gapped core set with  $A_L = 315$  nH, asymmetrical gap (A).  
2000 — ungapped core set,  $A_L = 2000$  nH.

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 3% ± 5% ± 25%

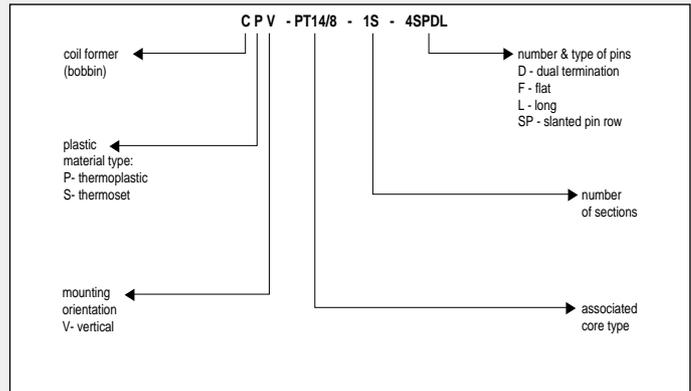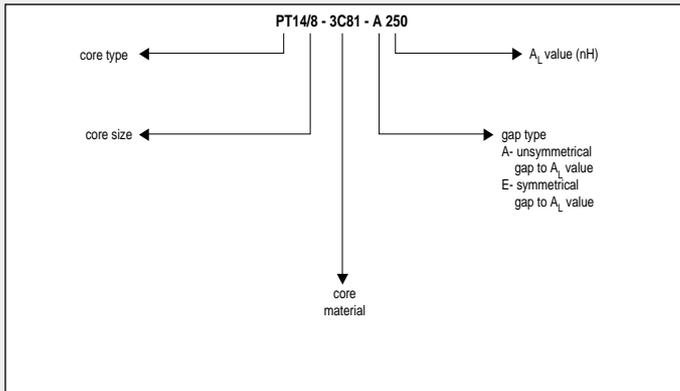

# PQ cores

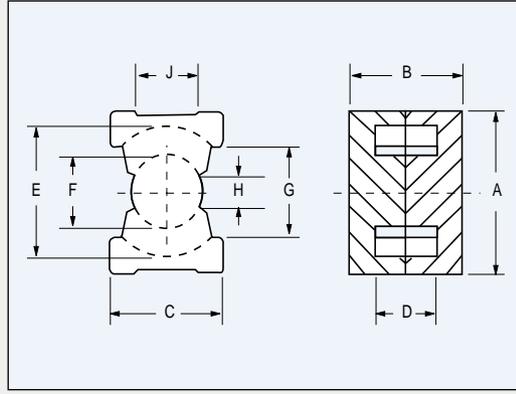

PQ cores, like RM/I cores, have round solid centre poles and round winding areas. On the outside the design is rectangular. Top and bottom of a core set are completely flat, allowing good thermal contact with heat sinks. PQ cores are mainly used in power conversion. Therefore they are only offered in power materials. For most core sizes matching coil formers are available.



Core type		PQ20/16	PQ20/20	PQ26/20	PQ26/25	PQ32/20	PQ32/30	PQ35/35
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	0.607	0.731	0.372	0.451	0.331	0.447	0.454
	eff. volume $V_e (\text{mm}^3)$	2330	2850	5470	6530	9440	12500	16300
	eff. length $l_e (\text{mm})$	37.6	45.7	45	54.3	55.9	74.7	86.1
	eff. area $A_e (\text{mm}^2)$	61.9	62.6	121	120	169	167	190
	min. area $A_{\text{min}} (\text{mm}^2)$	59.1	59.1	109	108	142	142	162
	mass of core set (g)	≈ 11	≈ 14	≈ 29	≈ 32	≈ 47	≈ 62	≈ 80
dimensions (mm)	A	21.3 ± 0.4	21.3 ± 0.4	27.3 ± 0.46	27.3 ± 0.46	33 ± 0.5	33 ± 0.5	36.1 ± 0.6
	B	16.2 ± 0.2	20.2 ± 0.2	20.2 ± 0.25	24.7 ± 0.25	20.6 ± 0.25	30.3 ± 0.25	34.7 ± 0.25
	C	14 ± 0.4	14 ± 0.4	19 ± 0.45	19 ± 0.45	22 ± 0.5	22 ± 0.5	26 ± 0.5
	D	10.3 ± 0.3	14.3 ± 0.3	11.5 ± 0.3	16.1 ± 0.3	11.5 ± 0.3	21.3 ± 0.3	25 ± 0.3
	E	18 ± 0.4	18 ± 0.4	22.5 ± 0.46	22.5 ± 0.46	27.5 ± 0.5	27.5 ± 0.5	32 ± 0.5
	F	8.8 ± 0.2	8.8 ± 0.2	12 ± 0.2	12 ± 0.2	13.5 ± 0.25	13.5 ± 0.25	14.4 ± 0.25
	G	12 min	12 min	15.5 min	15.5 min	19 min	19 min	23.5 min
	H	4 min	4 min	6 min	6 min	5.5 min	5.5 min	6 min
	J	7.9 min	7.9 min	10.5 min	10.5 min	11.6 min	11.6 min	11.8 min
coil formers	CPV	1S - 14P 1S - 14PD	1S - 14P 1S - 14PD	1S - 12P 1S - 12PD				

Core type		PQ20/16	PQ20/20	PQ26/20	PQ26/25	PQ32/20	PQ32/30	PQ35/35
core SETS for general purpose transformers and power applications	3C81	A160	A160	E250	E250	E315	E315	E315
		A250	A250	A315	A315	A400	A400	E400
		A315	A315	A400	A400	A630	A630	A630
		A400	A400	A630	A630	A1000	A1000	A1000
		A630	A630	A1000	A1000	A1600	A1600	A1600
		4080	3580	7020	6010	7560	6570	5330
	3C90	A160	A160	E250	E250	E315	E315	E315
		A250	A250	A315	A315	A400	A400	E400
		A315	A315	A400	A400	A630	A630	A630
		A400	A400	A630	A630	A1000	A1000	A1000
		A630	A630	A1000	A1000	A1600	A1600	A1600
		3250	2820	5530	4700	6000	5040	4300
	3C91	4080	3580	7020	6010	7560	6570	5330
	3C94	3250	2820	5530	4700	6000	5040	4300
	3C96	3250	2820	5530	4700	6000	5040	4300
	3F3	A160	A160	E250	E250	E315	E315	E315
		A250	A250	A315	A315	A400	A400	E400
		A315	A315	A400	A400	A630	A630	A630
		A400	A400	A630	A630	A1000	A1000	A1000
		A630	A630	A1000	A1000	A1600	A1600	A1600
3080		2650	5200	4390	6000	4580	4570	
3F35								


- E63 — gapped core set with  $A_L = 63$  nH, symmetrical gap (E).
- A315 — gapped core set with  $A_L = 315$  nH, asymmetrical gap (A).
- 4080 — ungapped core set,  $A_L = 4080$  nH.

$A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 3% ± 5% ± 25%

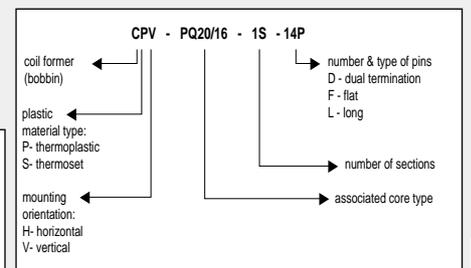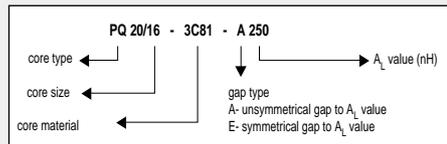

# RM cores

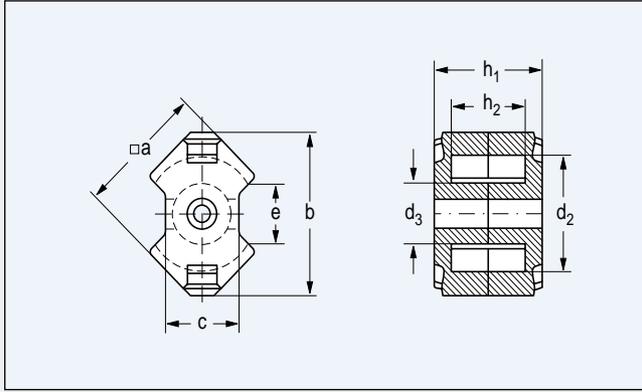

RM cores were designed for use in high Q, high stability filter inductors. Their shape allows economic utilization of surface area on the PCB. The range is standardized in IEC 431 and is available worldwide from many suppliers. The sizes are based on the standard PCB grid distance. RM 5, for instance, fits on a board space of 5 x 5 modules of 2.5 mm grid. Coil formers and clips were optimized for automated winding and mounting. The slots provide sufficient space for leads of windings. Magnetic shielding is not as good as with P-cores, but still effective.

**Summary:**


- ◆ standardized range
- ◆ complete range of accessories
- ◆ easy for automated winding
- ◆ simple mounting system
- ◆ efficient utilization of PCB area
- ◆ wider slots to get leads out
- ◆ good magnetic shielding
- ◆ good selection of coil formers

**remark:** coil formers CSV series with other pin configurations available on request.

Core type		RM4	RM5	RM6S	RM8
effective core parameters	core factor $\Sigma l/A(\text{mm}^{-1})$	1.94	1.01	0.863	0.683
	eff. volume $V_e (\text{mm}^3)$	230	450	840	1850
	eff. length $l_e (\text{mm})$	21.3	21.4	27.3	35.5
	eff. area $A_e (\text{mm}^2)$	11.0	21.2	31.0	52.0
	min. area $A_{\text{min}} (\text{mm}^2)$	8.1	14.8	23.8	39.5
	mass of core set (g)	≈ 1.4	≈ 3.0	≈ 4.5	≈ 10.9
dimensions (mm)	a	9.8 – 0.4	12.3 – 0.5	14.7 – 0.6	19.7 – 0.8
	b	11 – 0.5	14.9 max	17.9 – 0.7	23.2 – 0.9
	c	4.6 – 0.2	7.4 – 0.4	8.2 – 0.4	11 – 0.5
	d2	7.95 + 0.4	10.2 + 0.4	12.4 + 0.5	17 + 0.6
	d3	3.9 – 0.2	4.9 – 0.2	6.4 – 0.2	8.55 – 0.3
	e	5.8 min	6.0 min	8.4 min	9.5 min
	h1	10.4 ± 0.1	10.4 ± 0.1	12.4 ± 0.1	16.4 ± 0.1
	h2	7 + 0.4	6.3 + 0.4	8 + 0.4	10.8 + 0.4
coil formers	CSV	1S - 6P	1S - 4P	1S - 4P	1S - 8P
		2S - 4P	2S - 4P	2S - 4P	1S - 12P
		1S - 5P	1S - 6P	1S - 6P	2S - 8P
		1S - 6P	2S - 6P	2S - 6P	2S - 12P
		2S - 5P	1S - 8P	1S - 8P	
		2S - 6P			
clips	CLI/P	RM4/5	RM4/5	RM6	RM8


Core type		RM4	RM5	RM6S	RM8
core SETS in materials for low flux level applications	3D3	E40	E40	E63	E100
		A63	E63	E100	E160
	400	E100	A160	1240	
		800	950		
3H3	A63	A160	A160	A250	
	A100	A250	A250	A315	
	A160	A315	A315	A400	
	900	A400	A400	A630	
		1650	2100	2850	

E63	gapped core set with $A_L = 63$ nH, symmetrical gap (E).
A315	gapped core set with $A_L = 315$ nH, asymmetrical gap (A).
950	ungapped core set, $A_L = 950$ nH.

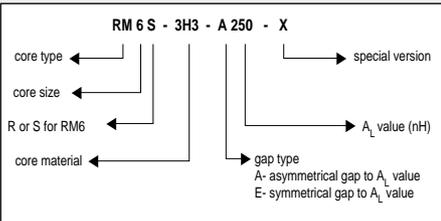


$A_L$  value (nH) measured at  $\dot{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 3% ± 5% ± 8% ± 10% ± 25%

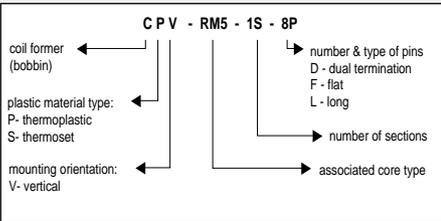

# RM/I cores

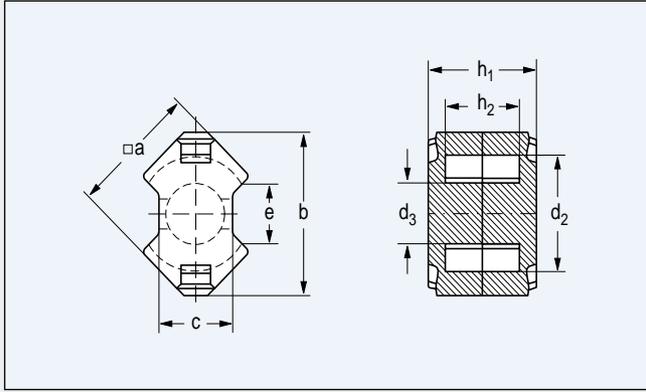

For applications other than filter inductors the centre hole in the RM core is not necessary. Inductance adjustment is generally not required. For wideband and power transformers core performance can be improved by using a solid centre pole.  $A_L$ -values will be higher and less flux concentrations occur in the core because its cross section has become more uniform.

Although RM cores were not designed for the function of power transformer or output choke they are frequently used for this purpose. Reason is the availability of a complete and standardized range of cores and accessories. For power applications a range of special, dual termination, coil formers is available.

**Summary:**



- ◆ standardized range
- ◆ complete range of coil formers
- ◆ simple assembly and mounting
- ◆ small winding area

**remark:** coil formers CSV series with other pin configurations available on request.

Core type		RM4/I	RM5/I	RM6S/I	RM8/I	RM10/I	RM12/I	RM14/I
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	1.69	0.935	0.784	0.604	0.462	0.388	0.353
	eff. volume $V_e (\text{mm}^3)$	322	574	1090	2440	4310	8340	13900
	eff. length $l_e (\text{mm})$	23.3	23.2	29.2	38.4	44.6	56.6	70.0
	eff. area $A_e (\text{mm}^2)$	13.8	24.8	37.0	63.0	96.6	146	198
	min. area $A_{\text{min}} (\text{mm}^2)$	11.5	18.1	31.2	55.4	89.1	125	168
	mass of core set (g)	≈ 1.7	≈ 3.3	≈ 4.9	≈ 12.0	≈ 22	≈ 45	≈ 74
dimensions (mm)	a	9.8 – 0.4	12.3 – 0.5	14.7 – 0.6	19.7 – 0.8	24.7 – 1.1	29.8 – 1.1	34.7 – 1.2
	b	11 – 0.5	14.9 max	17.9 – 0.7	23.2 – 0.9	28.5 – 1.3	37.4 – 1.3	42.2 – 1.4
	c	4.6 – 0.2	6.8 – 0.4	8.2 – 0.4	11 – 0.5	13.5 – 0.5	16.1 – 0.5	19 – 0.6
	d2	7.95 + 0.4	10.2 + 0.4	12.4 + 0.5	17 + 0.6	21.2 + 0.9	25 + 1	29 + 1.2
	d3	3.9 – 0.2	4.9 – 0.2	6.4 – 0.2	8.55 – 0.3	10.9 – 0.4	12.8 – 0.4	15 – 0.6
	e	5.8 min	6 min	8.4 min	9.5 min	10.9 min	12.9 min	17 min
	h1	10.4 ± 0.1	10.4 ± 0.1	12.4 ± 0.1	16.4 ± 0.1	18.6 ± 0.1	24.5 ± 0.1	30.1 ± 0.1
	h2	7 + 0.4	6.3 + 0.4	8 + 0.4	10.8 + 0.4	12.4 + 0.6	16.8 + 0.6	20.8 + 0.6
coil formers	CPV	1S - 6PD	1S - 8PD	1S - 8PD	1S - 12PD	1S - 12PD	1S - 12PD	1S - 12PD
	CSV	1S - 6P	1S - 6P 2S - 6P	1S - 6P 2S - 6P 1S - 8P	1S - 12P 2S - 12P	1S - 12P 2S - 12P		1S - 12P
	CPVS	1S - 6P						
	CSVS		1S - 8P	1S - 8P				
clips	CLI	RM4/5/I	RM4/5/I	RM6/I	RM8/I			
	CLI/P	RM4/5/I RM4/5	RM4/5/I RM4/5	RM6/I RM6	RM8/I RM8	RM10/I	RM12/I	RM14/I

Core type		RM4/I	RM5/I	RM6S/I	RM8/I	RM10/I	RM12/I	RM14/I	
core SETS for general purpose transformers and power applications	3D3 <b>des</b>			A160 A250 A315 1050	A250 A315 A400 1400	A315 A400 A630 1900			
	3H3 <b>des</b>			A315 A400 A630 2350	A400 A630 A1000 3250	A400 A630 A1000 4400			
	3C81			A63 A100 A160 A250 A315 3000	E100 A160 A250 A315 A400 3400	E160 A250 A315 A400 A630 5400			
	3C90		A63 A100 A160 A250 A315 2000	A63 A100 A160 A250 A315 A400 A630 2600	A100 A160 A250 A315 A400 3600	A160 A250 A315 A400 A630 4950	A160 A250 A315 A400 A630 6200	A250 A315 A400 A630 A1000 7100	
	3C91 <b>prot</b>	1125		A630 2600					
	3C94 <b>des</b>		A63 A100 A160 A250 A315 2000	A63 A100 A160 A250 A315 A400 A630 2600	A100 A160 A250 A315 A400 3600	A160 A250 A315 A400 A630 4950	A160 A250 A315 A400 A630 6200	A250 A315 A400 A630 A1000 7100	
	3C96 <b>prot</b>	1000	1800	2350	3250	4400	5500	6200	
	3F3	A100 A160 A250 950	A63 A100 A160 A250 A315 1700	A63 A100 A160 A250 A315 2150	A100 A160 A250 A315 A400 3000	A160 A250 A315 A400 A630 4050	A160 A250 A315 A400 A630 5050	A250 A315 A400 A630 A1000 5700	
	3F35 <b>prot</b>	800	1400	1750	2400				
	3F4 <b>des</b>	A100 A160 A250 560	A100 A160 A250 1000	A63 A100 A160 A250 A315 1250	A100 A160 A250 A315 A400 1700				
	high $\mu$ SETS	3E1 3E4 3E27 3E5 3E6	1800 2500 3500	3150 4500 4975 6700 9500	4100 5750 6000 8600 12500	5800 8000 8000 12500 18000	8000 11000 10700 16000		

E63 — gapped core set with  $A_L = 63$  nH, symmetrical gap (E).  
A315 — gapped core set with  $A_L = 315$  nH, asymmetrical gap (A).  
2000 — ungapped core set,  $A_L = 2000$  nH.

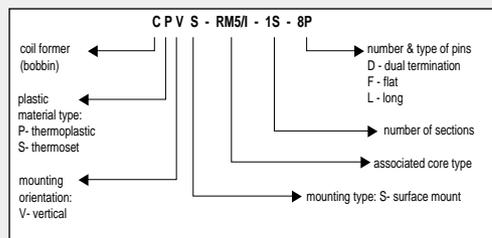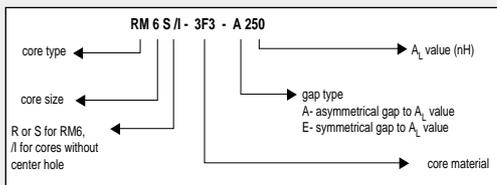


$A_L$  value (nH) measured at  
 $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance:

$\pm 3\%$	$\pm 5\%$	$\pm 8\%$
$\pm 10\%$	$\pm 25\%$	$+40\%$ $-30\%$

# RM/ILP cores

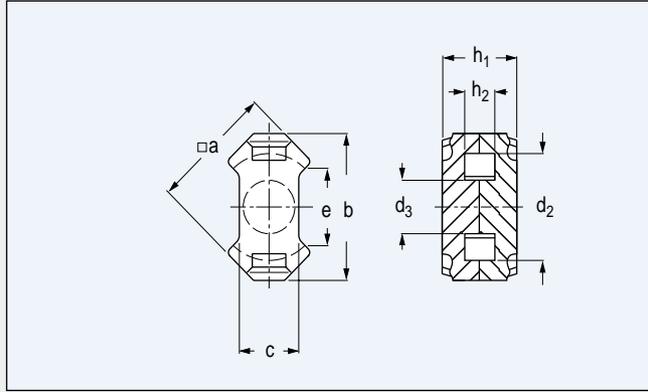


These low-profile RM cores have solid centre poles and a lower height than the standard RM range. They are ideal to construct transformers and inductors with a lower build height needed for low profile equipment. The cores can also be used for planar designs, either combined with PCB windings as a stand-alone device, or with integrated PCB-windings.

Summary:

- ◆ low build height
- ◆ suitable for planar designs

Core type		RM4/ILP	RM5/ILP	RM6S/ILP	RM8/ILP	RM10/ILP	RM12/ILP	RM14/ILP
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	1.20	0.710	0.580	0.440	0.340	0.280	0.250
	eff. volume $V_e (\text{mm}^3)$	251	430	820	1860	3360	6200	10230
	eff. length $l_e (\text{mm})$	17.3	17.5	21.8	28.7	33.9	42	50.9
	eff. area $A_e (\text{mm}^2)$	14.5	24.5	37.5	64.9	99.1	148	201
	min. area $A_{\text{min}} (\text{mm}^2)$	11.3	18.1	31.2	55.4	89.1	125	168
	mass of core set (g)	≈ 1.5	≈ 2.2	≈ 4.2	≈ 10	≈ 17	≈ 34	≈ 55
dimensions (mm)	a	9.8 – 0.4	12.3 – 0.5	14.7 – 0.6	19.7 – 0.8	24.7 – 1.1	29.8 – 1.1	34.7 – 1.2
	b	11 – 0.5	14.6 – 0.6	17.9 – 0.7	23.2 – 0.9	28.5 – 1.3	37.4 – 1.3	42.2 – 1.4
	c	4.6 – 0.2	6.8 – 0.4	8.2 – 0.4	11 – 0.5	13.5 – 0.5	16.1 – 0.5	19 – 0.6
	d2	7.95 + 0.4	10.2 + 0.4	12.4 + 0.5	17 + 0.6	21.2 + 0.9	25 + 1	29 + 1.2
	d3	3.9 – 0.2	4.9 – 0.2	6.4 – 0.2	8.55 – 0.3	10.9 – 0.4	12.8 – 0.4	15 – 0.6
	e	5.8 min	6 min	8.4 min	9.5 min	10.9 min	12.9 min	17 min
	h1	7.8 – 0.2	7.8 – 0.2	9 – 0.2	11.6 – 0.2	13 – 0.2	16.8 – 0.2	20.5 – 0.2
	h2	4.3 + 0.4	3.6 + 0.4	4.5 + 0.4	5.9 + 0.4	6.7 + 0.4	9 + 0.5	11.1 + 0.6
coil formers	CSV				1S - 10P 1S - 12P			
	CPV					1S - 12PD		
	CPVS							
	CSVS	1S - 8P	1S - 8P	1S - 8P				
clips	CLI	RM4/5/ILP	RM4/5/ILP	RM6/ILP				
	CLI/P				RM8/ILP	RM10/ILP		

Core type		RM4/ILP des	RM5/ILP des	RM6S/ILP des	RM8/ILP des	RM10/ILP des	RM12/ILP des	RM14/ILP des
core SETS for general purpose transformers and power applications	3H3 des			A160 A250 A315 1350	A250 A315 A400 1850	A315 A400 A630 2500		
	3D3 des			A315 A400 A630 2900	A400 A630 A1000 4100	A400 A630 A1000 5600		
	3C90	1400	2350	3175	4550	6300	8100	9400
	3C94 des	1400	2350	3175	4550	6300	8100	9400
	3C96 prot	1250	2100	2900	4100	5600	7200	8300
	3F3	1200	2000	2700	3800	5200	6700	7700
	3F35 prot	1000	1700	2200	3100			
	3F4 des	750	1250	1600	2200	3000	3600	4200
high $\mu$ SETS	3E5	5000	8500	10500	16000	22000		
	3E6	6700	11500	15000	23000	32000		

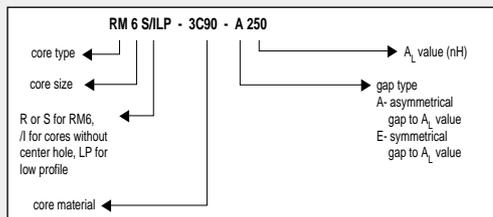


1300



ungapped core set, A<sub>L</sub> = 1300 nH

A<sub>L</sub> value (nH) measured at  $\dot{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

A<sub>L</sub> tolerance: ± 3% ± 5% ± 8% ± 10% ± 25% + 40%  
- 30%

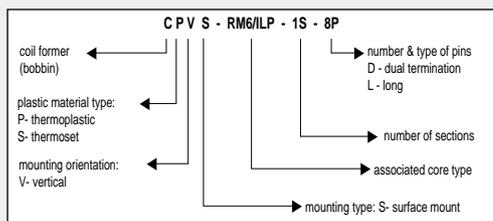

# U cores

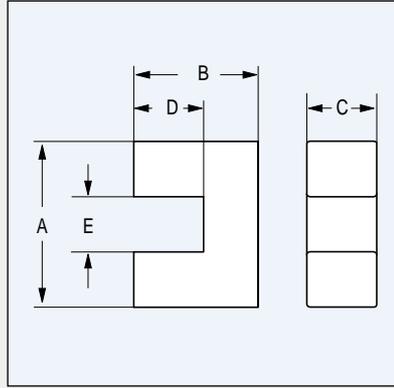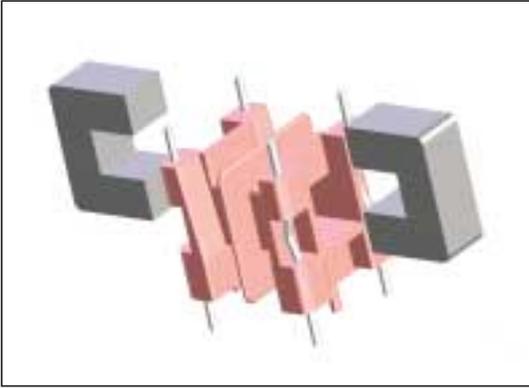

U cores, with rectangular cross-sections, are easy to produce and are relatively inexpensive. For this reason they are very popular in low cost applications such as interference filters and output chokes in radio and TV equipment. There is no real optimization for transformer winding designs and the core is rather bulky. Large U cores like U93 and U100 are suitable for very high throughput powers. They can be stacked to form transformers, capable of handling several kW's in applications such as industrial HF welding.

**Summary:**



- ◆ simple, economic shape
- ◆ can be stacked for high power
- ◆ bulky sizes
- ◆ no self-shielding

Core type		U10/8/3	U15/11/6	U20/16/7	U25/16/6 (376U250)	U25/20/13	U30/25/16
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	4.74	1.60	1.21	2.07	0.850	0.690
	eff. volume $V_e (\text{mm}^3)$	309	1680	3800	3380	9180	17900
	eff. length $l_e (\text{mm})$	38.3	52	68	83.6	88.2	111
	eff. area $A_e (\text{mm}^2)$	8.07	32.3	56	40.3	104	161
	min. area $A_{\text{min}} (\text{mm}^2)$	7.91	32.3	56	40.3	104	161
	mass of core half (g)	≈ 0.9	≈ 4	≈ 9	≈ 8	≈ 23.5	≈ 43
dimensions (mm)	A	9.9 ± 0.3	15.4 ± 0.5	20.8 ± 0.6	25.4 + 0.5/ - 0.4	24.8 ± 0.7	31.3 ± 0.7
	B	8.2 - 0.2	11.45 ± 0.2	15.6 ± 0.2	15.9 ± 0.13	19.6 ± 0.2	25.3 ± 0.2
	C	2.85 ± 0.15	6.25 + 0.4	7.5 ± 0.25	6.4 ± 0.13	12.7 ± 0.3	16 + 0.5/ - 0.1
	D	5 + 0.3	6.4 ± 0.35	8.3 ± 0.3	9.5 ± 0.13	11.4 ± 0.4	14.9 ± 0.4
	E	4.35 ± 0.2	5.4 ± 0.4	6.4 ± 0.4	12.7 ± 0.25	8.4 ± 0.4	10.5 ± 0.5
coil formers	CPH	1S - 4P	1S - 4P 2S - 4P				
core HALVES	3C81				1400		
	3C90	420	1400	1900	1200	2900	3700
	3E25		3400 <b>des</b>	4800 <b>des</b>	2320 <b>sup</b>	6300 <b>des</b>	
	3E26						
	3E27		3400	4800	2320	6300	

540

$A_L = 540$  nH measured in combination with another ungapped core half.  
 $A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance: ± 25%

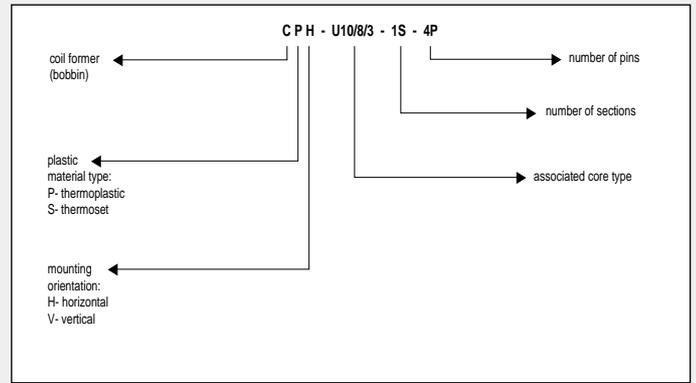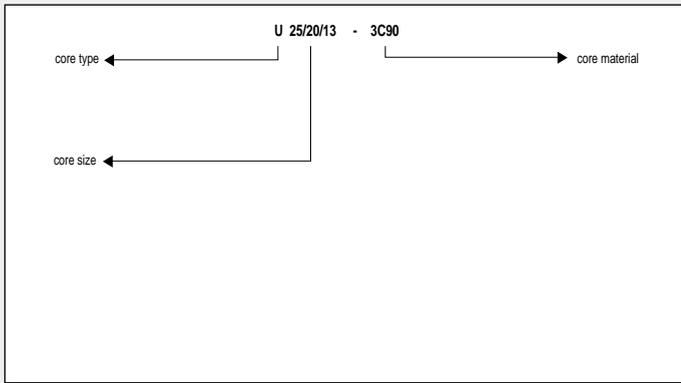

Core type		U33/22/9 (1F30)	U67/27/14 (1F10)	U93/76/16	U93/52/30	U93/76/30	U100/57/25
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	1.27	0.850	0.790	0.307	0.421	0.478
	eff. volume $V_e (\text{mm}^3)$	9490	35200	159000	217000	297000	199000
	eff. length $l_e (\text{mm})$	110	173	354	258	354	308
	eff. area $A_e (\text{mm}^2)$	86.5	204	448	840	840	645
	mass of core half (g)	≈ 24	≈ 85	≈ 400	≈ 560	≈ 760	≈ 500
dimensions (mm)	A	33.3 ± 0.8	67.3 ± 1.3	93 ± 1.8	93 ± 1.8	93 ± 1.8	101.6 ± 2
	B	22.2 ± 0.15	27 ± 0.15	76 ± 0.5	52 ± 0.5	76 ± 0.5	57.1 ± 0.4
	C	9.4 ± 0.25	14.3 ± 0.4	16 ± 0.6	30 ± 0.6	30 ± 0.6	25.4 ± 0.8
	D	12.7 ± 0.25	12.7 ± 0.25	48 ± 0.9	24 ± 0.45	48 ± 0.9	31.7 ± 0.75
	E	14.3 ± 0.5	38.8 ± 0.8	36.2 ± 1.2	36.2 ± 1.2	36.2 ± 1.2	50.8 ± 1
coil formers	CPH						
core HALVES	3C81	2300	3800				
	3C90			3400	8700	6400	5500
	3E25						
	3E27						



540

$A_L = 540 \text{ nH}$  measured in combination with another ungapped core half.  
 $A_L$  value (nH) measured at  $B \leq 0.1 \text{ mT}$ ,  $f \leq 10 \text{ kHz}$ ,  $T = 25^\circ\text{C}$

$A_L$  tolerance:

± 25%

# I cores

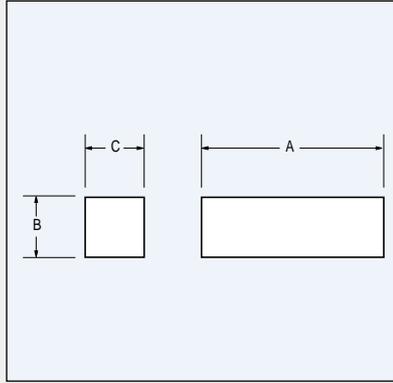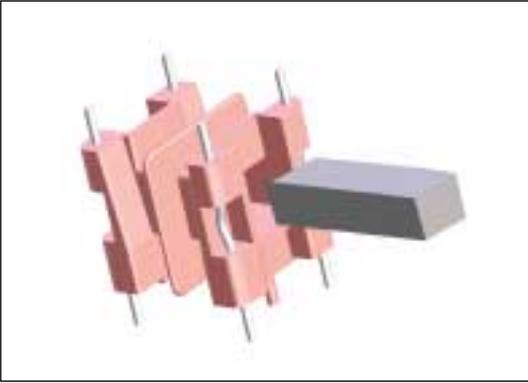


I cores are often used in combination with U-cores to build a simple transformer or inductor. The smaller types, I 15, I 20 and I 25 fit the range of U coil formers. This combination is suitable for easy to wind inductors in applications such as interference filters and output chokes. As with rods, the magnetic circuit is open which is an advantage when the currents have a high DC content.

Summary:





- ◆ simple, economic shape
- ◆ often combined with U cores
- ◆ for open circuit inductors
- ◆ no self-shielding

Core type		I20/6/5	I25/7/7	I93/28/16	I93/28/30	I100/25/25
dimensions (mm)	A	19.8 ± 0.5	25 ± 0.7	93 ± 1.8	93 ± 1.8	101.6 ± 2
	B	6.3 ± 0.25	7.5 + 0.2 / - 0.3	27.5 ± 0.5	30 ± 0.6	25.4 ± 0.8
	C	5.1 ± 0.2	7.5 + 0.2 / - 0.3	16 ± 0.6	27.5 ± 0.5	25.4 ± 0.8
	mass (g)	≈ 3	≈ 7	≈ 200	≈ 370	≈ 300
cores	3C81					
	3C90	■	■	■	■	■
	3E25					
	3E27					


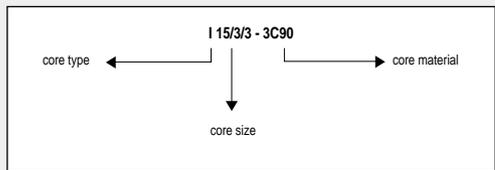


# UR cores

This type is suitable for Line Output Transformers (LOT) in TV-sets. The round leg allows easy winding, also of strip conductors. Because of the high voltages involved, the round shape helps to prevent corona effect.

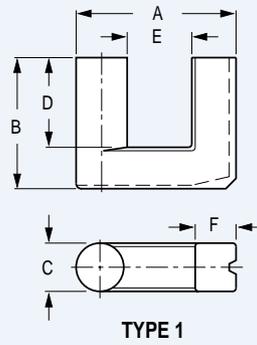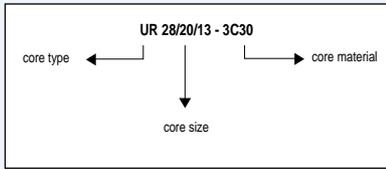


TYPE 2



TYPE 3

Core type	shape	dimensions (mm)						effective core parameters				
		A	B	C	D	$E_{min}$	F	core factor $\Sigma I/A$ ( $mm^{-1}$ )	eff. volume $V_{e3}$ ( $mm^3$ )	eff. length $l_e$ (mm)	eff. area $A_{e2}$ ( $mm^2$ )	mass of core half (g)
UR28/20/14	6	28.3	20.4	11.2	13.0	8.5	7.5	0.990	9460	97	98	25
UR35/28/13	5	35.2	28.3	12.7	18.8	13.1	9.3	1.100	15900	132	120	42
UR39/35/15	3	38.7	35.2	14.9	24.8	15.0	9.1	1.094	24300	163	149	64
UR42/21/12	4	41.8	20.6	11.9	11.1	18.2	11.9	1.09	11800	113	104	31
UR42/32/15	5	42.5	31.8	15.2	20.2	14.4	12.0	0.832	26670	149	179	69
UR43/34/16	2	42.1	34.0	15.8	24.0	15.7	9.6	0.982	27100	163	166	71
UR44/36/15	1	43.8	35.9	14.65	24.45	16.65	11.8	1.006	28700	170	169	71
UR47/36/16	5	47.55	35.7	15.95	23.8	18.25	12.6	0.900	33800	174	194	86
UR48/39/17	5	48.0	39.4	17.0	26.4	17.4	13.0	0.865	39990	186	215	99
UR64/29/14	4	64.0	29.5	13.8	18.1	36.1	13.8	1.26	27000	185	147	71
UR64/40/20	7	64.0	40.5	20.0	26.5	23.2	20.0	0.726	61000	210	290	160

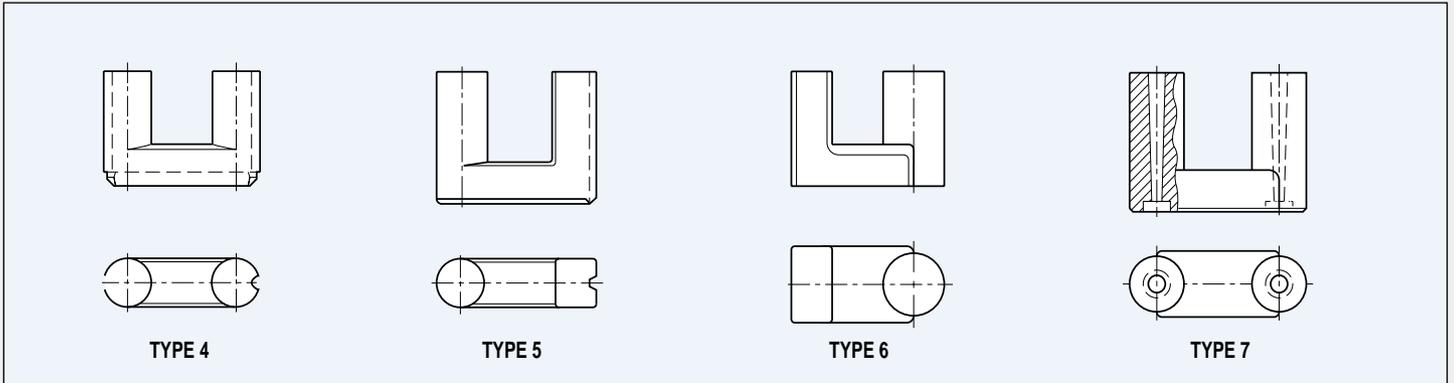

shape	product range			
	3C81 / 3F3	3C15	3C30 des	3C34 prot
6	-	-	UR28/20/13 - 3C30	-
5	-	UR35/28/13 - 3C15	UR35/28/13 - 3C30	-
3	-	UR39/35/15 - 3C15	UR39/35/15 - 3C30	-
4	UR42/21/12 - 3C81	-	-	-
5	-	UR42/32/15 - 3C15	UR42/32/15 - 3C30	-
2	-	UR43/34/16 - 3C15	UR43/34/16 - 3C30	-
1	-	UR44/36/15 - 3C15	UR44/36/15 - 3C30	-
5	-	UR47/36/16 - 3C15	UR47/36/16 - 3C30	-
5	-	UR48/39/17 - 3C15	UR48/39/17 - 3C30	-
4	UR64/29/14 - 3C81	-	-	-
7	-	-	-	-
7	UR64/40/20 - 3F3	-	-	-

Our present selection is displayed in the table above. In principle any core type can be supplied in all available grades. Other customized shapes can be manufactured on request.


# Ferrite Toroids

Ring cores have the best possible shape from the magnetic point of view. The flux path is completely closed so the capabilities of the ferrite are fully exploited. Especially for high permeability ferrites the effect of even a minor airgap in the magnetic circuit can spoil up to 50% of the effective permeability. A further advantage is the very low leakage field which makes it a suitable shape for power and pulse transformers.

Ring cores are mainly used for pulse- and wide band transformers and interference suppression coils but also in special power supplies.

Summary:


- ◆ simple economic shape
- ◆ very low stray flux and leakage inductance
- ◆ not easy to wind

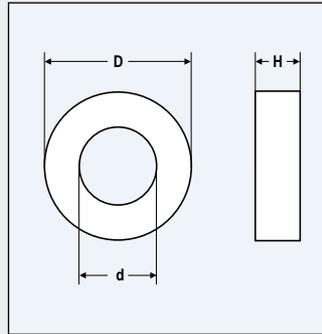

Core type	dimensions (mm)			effective core parameters				
	outside diameter D	inside diameter d	height H	core factor $\Sigma l/A(\text{mm}^{-1})$	eff. volume $V_e(\text{mm}^3)$	eff. length $l_e(\text{mm})$	eff. area $A_e(\text{mm}^2)$	mass (g)
TC2.5/1.3/0.8	2.54 ± 0.1	1.27 ± 0.1	0.8 ± 0.1	11.3	2.7	5.53	0.49	0.012
TC2.5/1.3/1.3	2.54 ± 0.1	1.27 ± 0.1	1.27 ± 0.1	7.14	4.29	5.53	0.76	0.022
TC2.5/1.3/2.5	2.54 ± 0.1	1.27 ± 0.1	2.54 ± 0.1	3.57	8.57	5.53	1.55	0.044
TC2.5/1.5/0.8	2.5 ± 0.1	1.5 ± 0.1	0.8 ± 0.1	16.4	2.21	6.02	0.37	0.012
TC2.5/1.5/1-S	2.5 ± 0.1	1.5 ± 0.1	1.0 ± 0.1	12.3	2.94	6.02	0.489	0.015
TC3.1/1.3/1.3	3.05 ± 0.15	1.27 ± 0.5	1.27 ± 0.15	5.65	6.35	5.99	1.06	0.033
TC3.1/1.8/2	3.05 ± 0.15	1.78 ± 0.15	2.03 ± 0.15	5.75	9.10	7.23	1.26	0.05
TC3.4/1.8/1.3	3.43 ± 0.18	1.78 ± 0.18	1.27 ± 0.18	7.93	7.3	7.62	0.96	0.035
TC3.4/1.8/2	3.35 ± 0.13	1.78 ± 0.13	2.03 ± 0.13	4.90	11.6	7.54	1.54	0.059
TC3.5/1.6/1.3	3.5 ± 0.15	1.6 ± 0.15	1.27 ± 0.15	6.32	8.3	7.25	1.15	0.043
TC3.5/1.8/1.8	3.46 ± 0.15	1.78 ± 0.1	1.78 ± 0.1	5.31	11.0	7.65	1.44	0.06
TC3.9/1.8/1.8	3.94 ± 0.2	1.78 ± 0.15	1.78 ± 0.15	4.44	14.8	8.1	1.83	0.086
TC3.9/1.8/2.5	3.94 ± 0.15	1.78 ± 0.15	2.54 ± 0.15	3.11	21.1	8.1	2.6	0.12
TC3.9/2.2/1.3	3.94 ± 0.17	2.24 ± 0.18	1.27 ± 0.18	9.20	9.2	9.2	1.00	0.045
TC4/2/2	4.0 ± 0.15	2.0 ± 0.1	2.0 ± 0.1	4.54	16.7	8.71	1.92	0.095
TC4/2.2/1.1	4.0 ± 0.15	2.2 ± 0.1	1.1 ± 0.1	9.55	8.82	9.18	0.961	0.04
TC4/2.2/1.3	4.0 ± 0.15	2.2 ± 0.1	1.27 ± 0.1	8.28	10.2	9.18	1.11	0.05
TC4/2.2/1.6	4.0 ± 0.15	2.2 ± 0.1	1.6 ± 0.1	6.56	12.9	9.2	1.40	0.06
TC4/2.2/1.8	4.0 ± 0.15	2.2 ± 0.1	1.78 ± 0.1	5.9	14.3	9.18	1.56	0.07
TC5.8/3.1/1.5	5.84 ± 0.18	3.05 ± 0.18	1.52 ± 0.18	6.52	26.1	13.0	2.00	0.13
TC5.8/3.1/3.2	5.84 ± 0.15	3.05 ± 0.15	3.17 ± 0.15	3.04	55.8	13.0	4.28	0.31
TC5.9/3.1/3	5.85 ± 0.15	3.05 ± 0.15	3 ± 0.15	3.2	53	13.0	4.05	0.14
TC6/4/2	6.0 ± 0.15	4.0 ± 0.15	2.0 ± 0.1	7.75	30.2	15.3	1.97	0.15
TC6.3/3.8/2.5	6.3 ± 0.15	3.8 ± 0.15	2.5 ± 0.15	4.97	46.5	15.2	3.06	0.23
TC7.6/3.2/4.8	7.6 ± 0.25	3.18 ± 0.2	4.78 ± 0.2	1.51	148	15.0	9.92	0.7
TN9/6/3	9.5 ± 0.3	5.4 ± 0.3	3.4 ± 0.25	5.17	102	22.9	4.44	0.5
TC9.5/4.8/3.2	9.5 ± 0.31	4.75 ± 0.18	3.2 ± 0.18	2.98	144	20.7	6.95	0.7
TN10/6/4	10.6 ± 0.3	5.2 ± 0.3	4.4 ± 0.3	3.07	188	24.1	7.8	0.95
TX13/7.1/4.8	12.95 ± 0.4	6.9 ± 0.35	5.03 ± 0.3	2.40	361	29.5	12.3	1.8
TN13/7.5/5	13.0 ± 0.35	6.8 ± 0.35	5.4 ± 0.3	2.46	368	30.1	12.2	1.8
TX13/7.9/6.4	12.95 ± 0.4	7.67 ± 0.4	6.6 ± 0.4	2.21	442	31.2	14.1	2.2
TN14/9/5	14.6 ± 0.4	8.2 ± 0.35	5.5 ± 0.3	2.84	430	35	12.3	2.1
TN14/9/9	14.8 ± 0.4	8.0 ± 0.4	9.5 ± 0.4	1.58	774	35	22.1	3.8
TX16/9.1/4.7	16.13 ± 0.5	8.82 ± 0.4	4.95 ± 0.3	2.53	548	37.2	14.7	2.7
TN16/9.6/6.3	16.7 ± 0.5	8.7 ± 0.4	6.8 ± 0.4	1.95	760	38.5	19.7	3.8
TN19/11/10	19.7 ± 0.6	9.7 ± 0.4	10.5 ± 0.5	1.08	1795	44.0	40.8	9.2
TN19/11/15	19.9 ± 0.6	9.5 ± 0.4	15.5 ± 0.55	0.718	2692	44.0	61.2	13.8
TN20/10/7	20.6 ± 0.6	9.2 ± 0.4	7.5 ± 0.45	1.30	1465	43.6	33.6	7.7
TX22/14/6.4	22.35 ± 0.7	13.47 ± 0.6	6.6 ± 0.4	2.20	1340	54.2	24.8	6.5
TX22/14/13	22.35 ± 0.7	13.47 ± 0.6	12.95 ± 0.5	1.07	2750	54.2	50.9	14
TN23/14/7	23.7 ± 0.7	13.1 ± 0.6	7.5 ± 0.45	1.81	1722	55.8	30.9	8.4
TN25/15/10	25.8 ± 0.7	14.0 ± 0.6	10.6 ± 0.5	1.23	2944	60.2	48.9	15
TN26/15/10	26.8 ± 0.7	13.5 ± 0.6	10.6 ± 0.5	1.08	3360	60.1	55.9	17

T = Toroid (Ring Core), TN = Toroid Nylon coated, TL = Toroid Laquered, TX = Toroid epoxy coated, TC = Toroid parylene C coated (no colour code)

Core type	dimensions (mm)			effective core parameters				
	outside diameter D	inside diameter d	height H	core factor $\Sigma I/A(\text{mm}^{-1})$	eff. volume $V_e (\text{mm}^3)$	eff. length $l_e (\text{mm})$	eff. area $A_e (\text{mm}^2)$	mass (g)
TN26/15/20	26.9 ± 0.7	13.2 ± 0.6	20.5 ± 0.6	0.538	6720	60.1	112	34
TN29/19/7.5	29.7 ± 0.7	18.2 ± 0.6	8.1 ± 0.5	1.98	2700	73.2	36.9	13.5
TX29/19/7.6	29.25 ± 0.7	18.75 ± 0.6	7.85 ± 0.5	2.06	2600	73.2	35.5	13
TN29/19/15	29.9 ± 0.7	18.1 ± 0.6	15.5 ± 0.6	0.98	5410	73.2	73.9	28
TN32/19/13	32.2 ± 0.8	18.1 ± 0.6	13 ± 0.5	0.99	5820	76	76.5	29
TE36/23/10	39.4 max	20.45 min	12.65 max	1.40	5730	89.6	63.9	30
TN36/23/10	36.8 ± 0.9	22.1 ± 0.7	10.7 ± 0.6	1.40	5730	89.6	63.9	28
TX36/23/10	36.25 ± 0.9	22.75 ± 0.7	10.42 ± 0.5	1.46	5540	89.7	61.8	27
TE36/23/15	39.4 max	20.45 min	12.65 max	0.935	8600	89.6	95.9	45
TN36/23/15	36.9 ± 0.9	21.9 ± 0.7	15.7 ± 0.6	0.935	8600	89.6	95.9	42
TX36/23/15	36.25 ± 0.9	22.75 ± 0.7	15.5 ± 0.6	0.96	8440	89.7	94.1	40
TX39/20/13	39.15 ± 0.9	19.3 ± 0.7	12.95 ± 0.5	0.76	9513	84.9	112	45
TL42/26/13	42.1 ± 1.1	25.9 ± 0.8	12.75 ± 0.5	1.076	9860	103	95.8	53
TL42/26/18	42.1 ± 1.1	25.9 ± 0.8	17.8 ± 0.7	0.769	13810	103	134	55
T50/30/19	50 ± 1	30 ± 0.7	19 ± 0.5	0.65	22378	120.4	186	100
TX51/32/19	51.05 ± 1.5	31.5 ± 1	19.3 ± 0.6	0.73	21500	125	172	100
TL55/32/18	55.8 ± 1.7	32.1 ± 1	18.3 ± 0.9	0.651	26580	131.5	202	134
TL58/41/18	58.7 ± 1.1	40.5 ± 0.9	17.9 ± 0.7	1.0	23200	152.4	152.4	110
TL63/38/25	63.4 ± 2.1	37.7 ± 1.3	25.3 ± 1	0.497	46500	152	306	220
TX74/39/13	73.9 ± 1.52	38.61 ± 1.32	12.95 ± 0.5	0.80	34300	165	208	170
TL87/54/14	87.4 ± 1.35	54 ± 1	13.8 ± 0.45	0.987	46400	214	217	220
T87/56/13	87 ± 1.25	56 ± 0.9	12.7 ± 0.25	1.123	42133	217.5	194	200
TL102/66/15	102.4 ± 2.1	65.5 ± 1.4	15.3 ± 0.7	0.956	68200	255	267	325
TL107/65/18	107.4 ± 2	64.7 ± 1.4	18.3 ± 0.55	0.700	96000	259	370	456
T140/106/25	140 ± 3	106 ± 2	25 ± 1	0.903	161100	382	422	800

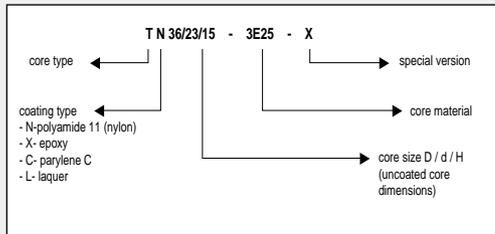

#### Isolation voltage

Toroids with polyamide, epoxy and laquer coating (TN, TX and TL)

diameter: < 12 : 1000 V<sub>DC</sub>  
 12-20 : 1500 V<sub>DC</sub>  
 > 20 : 2000 V<sub>DC</sub>

Toroids with parylene coating (TC): 1000 V<sub>DC</sub>

Toroids with plastic caps (TE): 3000 V<sub>DC</sub>



# Ferrite Toroids

Core type \ Material Colour Code	3B7	3C11 white	3C81	3C90	3D3	3E5 yellow /white	3E6 purple /white	3E7	3E25 orange
TC2.5/1.3/0.8									
TC2.5/1.3/1.3							1835 des		970 des
TC2.5/1.3/2.5									
TC2.5/1.5/0.8							765 des		
TC2.5/1.5/1-S						920 des	1020 des		
TC3.1/1.3/1.3									1225 des
TC3.1/1.8/2									
TC3.4/1.8/1.3	375 sup				110 sup		1580 des		
TC3.4/1.8/2									1420 des
TC3.5/1.6/1.3		862							
TC3.5/1.8/1.8									
TC3.9/1.8/1.8									
TC3.9/1.8/2.5									
TC3.9/2.2/1.3	325 sup				97 sup				
TC4/2/2		1190							
TC4/2.2/1.1						1120	1315 des		725
TC4/2.2/1.3									720
TC4/2.2/1.6						1630	1915 des		1050
TC4/2.2/1.8							2130 des		
TC5.8/3.1/1.5	450 sup								
TC5.8/3.1/3.2	940 sup						4130 des		
TC6/4/2						1380	1620 des		890
TC6.3/3.8/2.5						2150	2530 des	3600 des	1390
TC7.6/3.2/4.8							8360 des		
TN9/6/3				560		2070 <sup>2)</sup>	2435 <sup>1)</sup> des		1340
TC9.5/4.8/3.2	1000 sup		1200		330 sup		4390 des	5323 des	
TN10/6/4		1750		940 des		3470 <sup>2)</sup>	4085 <sup>2)</sup> des		2250
TX13/7.1/4.8			1475	1260 des	415 sup		5400 des		
TN13/7.5/5		2200		1170 des		4340 <sup>2)</sup>	5095 <sup>2)</sup> des		2810
TX13/7.9/6.4			1620	1380 des			5900 des		3000
TN14/9/5		1900		1015 des		3760 <sup>2)</sup>	4415 <sup>2)</sup> des		2430
TN14/9/9		3400		1825 des		6760 <sup>2)</sup>	7955 <sup>2)</sup> des		4370

1200 — nominal  $A_L$  value (nH) measured at  $\dot{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

$A_L$  tolerance:  $\pm 20\%$   $\pm 25\%$   $\pm 30\%$   $+40\%$   
 $-30\%$

1) coated with parylene C (no colour code)

2) lacquered with polyurethane

$+25\%$   $+30\%$   $+20\%$   
 $-20\%$   $-40\%$   $-40\%$

Core type \ Material Colour Code	3E27 green	3E28	3F3 blue	3F4 beige	3R1 black	3S4	4A11	4B1	4C65
TC2.5/1.3/0.8							94 des		
TC2.5/1.3/1.3						300 des	150 des		
TC2.5/1.3/2.5		1400 des							
TC2.5/1.5/0.8									
TC2.5/1.5/1-S							71 des		
TC3.1/1.3/1.3							190 des		
TC3.1/1.8/2		1100 des							
TC3.4/1.8/1.3	660								
TC3.4/1.8/2									
TC3.5/1.6/1.3									
TC3.5/1.8/1.8		950 des							
TC3.9/1.8/1.8		1400 des							
TC3.9/1.8/2.5		2020 des							
TC3.9/2.2/1.3	575								
TC4/2/2		1110 des							
TC4/2.2/1.1			260				92		16
TC4/2.2/1.3							122		
TC4/2.2/1.6			380			325 des	134		24
TC4/2.2/1.8									
TC5.8/3.1/1.5	890							50 des	25
TC5.8/3.1/3.2		1650 des							
TC6/4/2			325			275 des	114		20
TC6.3/3.8/2.5			500				177		
TC7.6/3.2/4.8		3800 des							
TN9/6/3			440		■		170		30
TC9.5/4.8/3.2	2135								
TN10/6/4			740				286		52
TX13/7.1/4.8	2750		990						
TN13/7.5/5			900	460 des	■		360		64
TX13/7.9/6.4	3000		1100						
TN14/9/5			790		■		310		55
TN14/9/9			1430				560		

1200 — nominal  $A_L$  value (nH) measured at  $B \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

- 1) coated with parylene C (no colour code)
- 2) lacquered with polyurethane

■ = available (no  $A_L$  spec.)

$A_L$  tolerance:  $\pm 20\%$   $\pm 25\%$   $\pm 30\%$   $+40\%$   
 $-30\%$

$+25\%$   $+30\%$   $+20\%$   
 $-20\%$   $-40\%$   $-40\%$

# Ferrite Toroids

Material Core type	Material Colour Code	3B7	3C11 <i>white</i>	3C81	3C90	3D3	3E5 yellow /white	3E6 purple /white	3E7	3E25 orange
TX16/9.1/4.7				1400	1215 <b>des</b>			5200 <b>des</b>		
TN16/9.6/6.3			2700		1480 <b>des</b>		5470 <sup>2)</sup>	6430 <sup>2)</sup> <b>des</b>		3540
TN19/11/10			5000		2680 <b>des</b>					6420
TN19/11/15			7500		4020 <b>des</b>					9630
TN20/10/7			4150		2230 <b>des</b>		8250 <sup>2)</sup>	9685 <sup>2)</sup> <b>des</b>		5340
TX22/14/6.4				1650	1400 <b>des</b>			6000 <b>des</b>		
TX22/14/13								12080 <b>des</b>		
TN23/14/7			3000		1600 <b>des</b>					3820
TN25/15/10			4400		2350 <b>des</b>		8680 <sup>2)</sup>	10200 <sup>2)</sup> <b>des</b>		5620
TN26/15/10			5000		2645 <b>des</b>		10000 <sup>2)</sup>			6420
TN26/15/20			10000		5400 <b>des</b>					12800
TN29/19/7.5			2700		1460			6340 <sup>2)</sup> <b>des</b>		3550
TX29/19/7.6				1740						
TN29/19/15								12850 <sup>2)</sup> <b>des</b>		7000
TN32/19/13			5450		2910 <b>des</b>		10700 <sup>2)</sup>			6950
TE36/23/10			3900		2060 <b>des</b>			9090 <b>des</b>		
TN36/23/10			3900		2060 <b>des</b>					
TE36/23/15			5800	3670	3090 <b>des</b>		12100	13600 <b>des</b>		7390
TN36/23/15			5800		3090 <b>des</b>		11400 <sup>2)</sup>	13400 <sup>2)</sup> <b>des</b>		7390
TX36/23/15				3670				13600 <b>des</b>		
TX39/20/13				4700	3800 <b>des</b>					
TL42/26/13			5000		2690 <b>des</b>					6425
TL42/26/18							12900			
T50/30/19								19400 <b>des</b>		
TX51/32/19				4800	3980 <b>des</b>			17300 <b>des</b>		8890
TL55/32/18										10620
TL58/41/18			5400		2890 <b>des</b>					6900
TL63/38/25										13900
TX74/39/13				4350	3620 <b>des</b>			15776 <sup>2)</sup> <b>des</b>		8060
TL87/54/14			5470		2930 <b>des</b>					
T87/56/13								11190 <b>des</b>		
TL102/66/15			5300							7900 <b>des</b>
TL107/65/18										9900 <b>des</b>
T107/65/25										
T140/106/25										7700 <b>des</b>

1200 — nominal  $A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$

- 1) coated with parylene C (no colour code)
- 2) lacquered with polyurethane

$A_L$  tolerance: ± 20% ± 25% ± 30% + 40%  
- 30%  
+ 25%  
- 20% + 30%  
- 40% + 20%  
- 40%

Core type \ Material Colour Code	3E27 green	3E28	3F3 blue	3F4 beige	3R1 black	3S4	4A11	4B1	4C65
TX16/9.1/4.7	2600								
TN16/9.6/6.3			1160				450		
TN19/11/10									
TN19/11/15									
TN20/10/7									121
TX22/14/6.4	3055								75 <sup>2)</sup>
TX22/14/13	6110		2200						
TN23/14/7			1250		■		485		87
TN25/15/10			1840						
TN26/15/10									
TN26/15/20									
TN29/19/7.5									
TX29/19/7.6	3225								
TN29/19/15									
TN32/19/13			2270						
TE36/23/10	4545								112
TN36/23/10									112
TE36/23/15	6800		2420		■		940		168
TN36/23/15			2420		■	2285 des	940		170
TX36/23/15	6800								
TX39/20/13	8720								
TL42/26/13							820		
TL42/26/18									
T50/30/19									
TX51/32/19	8890		3200						
TL55/32/18	10620						1350		
TL58/41/18									
TL63/38/25			4550						
TX74/39/13			2900						
TL87/54/14									
T87/56/13									
TL102/66/15									165 des
TL107/65/18			3230	1354 des					
T107/65/25			4485 des	1870 des					
T140/106/25									

1200 — nominal  $A_L$  value (nH) measured at  $\hat{B} \leq 0.1$  mT,  $f \leq 10$  kHz,  $T = 25^\circ\text{C}$


$A_L$  tolerance:  $\pm 20\%$   $\pm 25\%$   $\pm 30\%$   $\begin{matrix} +40\% \\ -30\% \end{matrix}$

- 1) coated with parylene C (no colour code) ■ = available (no  $A_L$  spec.)  
 2) lacquered with polyurethane

$\begin{matrix} +25\% \\ -20\% \end{matrix}$   $\begin{matrix} +30\% \\ -40\% \end{matrix}$   $\begin{matrix} +20\% \\ -40\% \end{matrix}$

T = Toroid (Ring Core), TN = Toroid Nylon coated, TL = Toroid Laquered, TX = Toroid epoxy coated, TC = Toroid parylene C coated, TE = Toroid Encapsulated in plastic caps

# Iron Powder Toroids

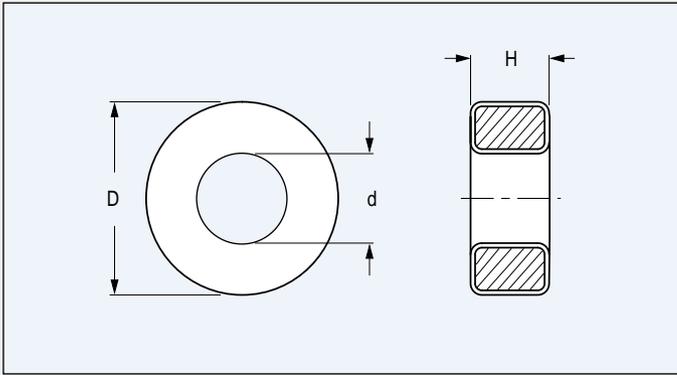


Due to the high saturation flux density of iron powder (950...1600 mT) these ring cores are very suitable for output chokes carrying high DC currents. Another application is found in lamp dimmers as ballast choke.

The cores are made of electrolytic iron powder, mixed with a small amount of resin for insulation. They are coated with polyamide 11 (thickness 0.1 - 0.3 mm). The isolation voltage between core and winding is up to 1500 V.


Summary:

- ◆ high saturation flux density
- ◆ suitable for output chokes
- ◆ for EMI-suppression with high DC bias

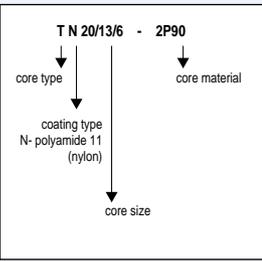

Core type		TN7.5/4.1/3 <b>sup</b>	TN12/8/4.4 <b>sup</b>	TN17/9.8/4.4 <b>sup</b>	TN20/13/6 <b>sup</b>	TN24/15/7.5 <b>sup</b>	TN27/15/11 <b>sup</b>	TN33/20/11 <b>sup</b>
effective core parameters	core factor $\Sigma I/A(\text{mm}^{-1})$	3.58	3.30	2.55	2.44	1.76	1.02	1.23
	eff. volume $V_e (\text{mm}^3)$	83	290	635	1020	1895	3720	5200
	eff. length $l_e (\text{mm})$	17.3	30.9	40.2	49.9	57.8	61.6	80.0
	eff. area $A_e (\text{mm}^2)$	4.81	9.37	15.8	20.4	32.8	60.4	65.0
	mass (g)	≈ 0.6	≈ 2	≈ 5	≈ 7.5	≈ 13	≈ 25	≈ 35
dimensions (mm)	D	8.1 ± 0.3	13.0 ± 0.3	17.8 ± 0.3	20.5 ± 0.5	24.3 ± 0.5	27.5 ± 0.5	33.6 ± 0.5
	d	3.5 ± 0.3	7.4 ± 0.3	8.9 ± 0.3	12.3 ± 0.5	13.8 ± 0.5	14.0 ± 0.5	19.2 ± 0.5
	H	3.3 ± 0.5	4.8 ± 0.5	4.8 ± 0.5	6.5 ± 0.5	8.1 ± 0.5	11.4 ± 0.5	11.5 ± 0.5
$A_L (\text{nH}) \pm 10\%$	2P40 dark yellow	14	15	20	21	29	49	41
	2P50 dark blue	18	19	25	26	36	62	51
	2P65 dark red	23	25	32	34	47	80	67
	2P80 dark green	28	31	40	41	57	94	82
	2P90 dark brown	30 <sup>1)</sup>	33 <sup>1)</sup>	42 <sup>1)</sup>	44 <sup>1)</sup>	61 <sup>1)</sup>	105 <sup>1)</sup>	87 <sup>1)</sup>

<sup>1)</sup>  $A_L$  tolerance: +10/-15%

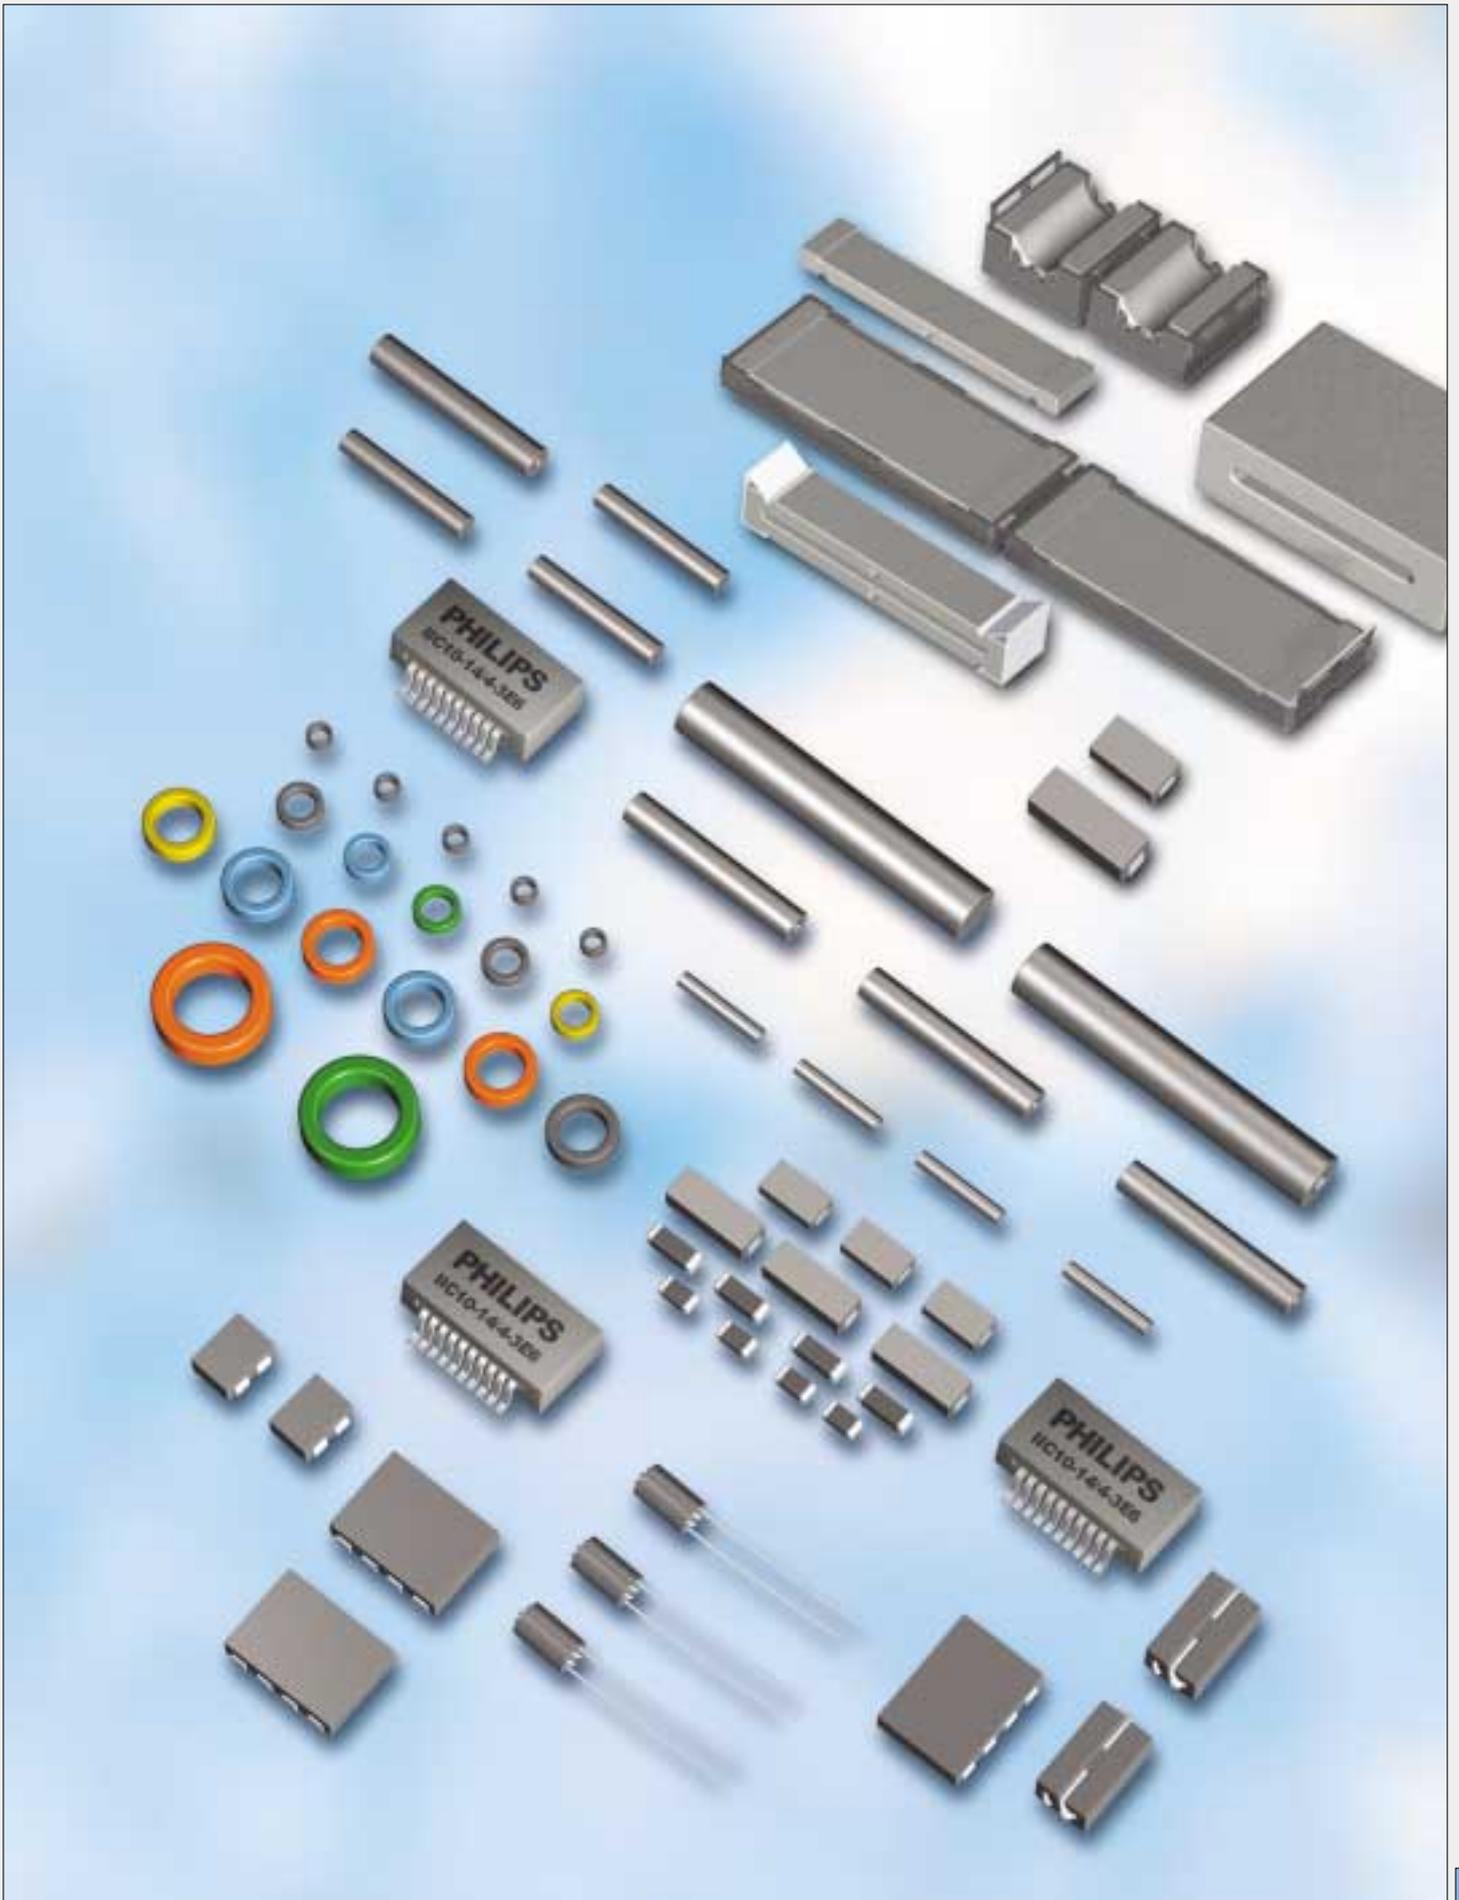

# Materials and applications for EMI-suppression

property	conditions				EMI-suppression												
	symbol	f (kHz)	$\vec{B}$ or H	T (°C)	unit	3B1	3C11	3E5	3E6	3E25	3E26	3E27	4A11	4A15	4B1	4C65	
$\mu_i$ ( $\pm 20\%$ )	$\leq 10$	$\leq 0.1\text{mT}$	25			900	4300	10 000	12 000	6000	7000	6000	700	1200	250	125	
tan $\delta/\mu_i$	30	$\leq 0.1\text{mT}$	25	$10^{-6}$			$\leq 25$	$\leq 30$									
	100					$\leq 20$	$\leq 75$		$\leq 25$	$\leq 20$	$\leq 15$						
	300					$\leq 200$		$\leq 200$									
	450																
	1000													$\leq 100$	$\leq 300$	$\leq 90$	
	3000													$\leq 1000$	$\leq 1500$	$\leq 300$	$\leq 80$
	10 000																
B	10	250A/m	100	mT	$\approx 200$	$\approx 180$	$\approx 210$	$\approx 210$	$\approx 180$	$\approx 290$	$\approx 280$	$\approx 180$	$\approx 180$	$\approx 260$	$\approx 250$		
		3000A/m	25		$\approx 370$	$\approx 340$	$\approx 380$	$\approx 380$	$\approx 380$	$\approx 450$	$\approx 400$	$\approx 320$	$\approx 340$	$\approx 350$	$\approx 380$		
H <sub>c</sub>	10		25	A/m	$\approx 25$	$\approx 10$	$\approx 5$	$\approx 4$	$\approx 5$	$\approx 5$	$\approx 5$	$\approx 35$	$\approx 25$	$\approx 150$	$\approx 250$		
B <sub>r</sub>				mT	$\approx 190$	$\approx 120$	$\approx 80$	$\approx 100$	$\approx 100$	$\approx 120$	$\approx 120$	$\approx 110$	$\approx 150$	$\approx 240$	$\approx 280$		
T <sub>c</sub>				°C	$\geq 150$	$\geq 125$	$\geq 125$	$\geq 130$	$\geq 125$	$\geq 155$	$\geq 150$	$\geq 125$	$\geq 125$	$\geq 250$	$\geq 350$		
$\rho$	DC		25	$\Omega\text{ m}$	$\approx 0.2$	$\approx 1$	$\approx 0.5$	$\approx 0.1$	$\approx 0.5$	$\approx 0.5$	$\approx 0.5$	$\approx 10^5$	$\approx 10^5$	$\approx 10^5$	$\approx 10^5$		
density				kg/m <sup>3</sup>	$\approx 4800$	$\approx 4900$	$\approx 4800$	$\approx 5100$	$\approx 5100$	$\approx 4600$	$\approx 4500$						
ferrite type					MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	MnZn	NiZn	NiZn	NiZn	NiZn		

Properties measured on sintered, non ground ring cores of dimensions  $\varnothing 25 \times \varnothing 15 \times 10$  mm which are not subjected to external stresses.

property	conditions				EMI-suppression						
	symbol	f (MHz)	$\vec{B}$ or H	T (°C)	unit	3S1	3S3	3S4	4S2	4S4	4S7
$\mu_i$	$\leq 0.01$	$\leq 0.1\text{mT}$	25			$\approx 4000$	$\approx 350$	$\approx 1700$	$\approx 700$	$\approx 250$	$\approx 200$
Z  <sup>1)</sup>	1	$\leq 0.1\text{mT}$	25	$\Omega$	$\geq 30$						
	3					$\geq 25$					
	10				$\geq 60$						
	30					$\geq 25$	$\geq 60$	$\geq 50$			
	100					$\geq 60$	$\geq 80$				
	300					$\geq 100$	$\geq 90$	$\geq 90$			
B	$\leq 0.01$	250A/m	100	mT	$\approx 180$	$\approx 250$	$\approx 140$	$\approx 180$	$\approx 130$	$\approx 120$	
		3000A/m	25		$\approx 400$	$\approx 350$	$\approx 350$	$\approx 350$	$\approx 300$	$\approx 300$	
H <sub>c</sub>	0.01		25	A/m	$\approx 10$	$\approx 60$	$\approx 20$	$\approx 30$	$\approx 160$	$\approx 180$	
B <sub>r</sub>				mT	$\approx 120$	$\approx 230$	$\approx 170$	$\approx 120$	$\approx 130$	$\approx 170$	
T <sub>c</sub>				°C	$\geq 125$	$\geq 225$	$\geq 110$	$\geq 125$	$\geq 130$	$\geq 140$	
$\rho$	DC		25	$\Omega\text{ m}$	$\approx 1$	$\approx 10^4$	$\approx 10^3$	$\approx 10^5$	$\approx 10^5$	$\approx 10^5$	
density				kg/m <sup>3</sup>	$\approx 4900$	$\approx 4800$	$\approx 4800$	$\approx 5000$	$\approx 5000$	$\approx 5000$	
ferrite type					MnZn	MnZn	MnZn	NiZn	NiZn	NiZn	

Products generally comply with the material specification. However, deviations may occur due to shape, size and grinding operations etc. Specified product properties are given in the data sheets or product drawings.

Properties measured on sintered, non ground ring cores of dimensions  $\varnothing 25 \times \varnothing 15 \times 10$  mm which are not subjected to external stresses.

1) Measured on a bead  $\varnothing 5 \times \varnothing 2 \times 10$  mm

## Materials and applications for EMI-suppression

Sample boxes containing specially selected ranges of ferrite products are available from Philips to help equipment manufacturers develop optimum solutions for EMI-suppression.

Each sample box contains an assortment of suppression cores that aids circuit designers in the often trial-and-error process of finding the most suitable EMI-suppression component.

### Surface Mount Beads and Chokes box

contains a range of beads, common mode chokes and wideband chokes for Surface Mount applications. These SMD components are suitable to prevent generated interference and to suppress incoming noise

signals and parasitic oscillations. All products are delivered in tape-and-reel according to IEC and EIA standards ready for use on automatic mounting machines.

Ordering code: SAMPLEBOX9

### Cable shielding sample box

offers a broad range of cable shielding products. This includes tubular cable shields for coaxial cables and rectangular cores for flat ribbon cables as well as split types for retro-fit solutions with the proper accessories. These products provide a high level of impedance over a wide

frequency range and allow EMI-suppression techniques to be used on both internal and external cabling in electronic equipment.

Ordering code: SAMPLEBOX10

### EMI-suppression Products box

contains leaded cores for automatic insertion in PCB's with different design configurations, plus beads and multihole cores in several materials, specially developed for interference applications, and ranging from small to large sizes to cover the different mechanical

requirements for the particular design.

Ordering code: SAMPLEBOX11


### Multilayer Suppressors box

contains a selection of suppressors in 4 different sizes: 0603, 0805, 1206 and 1806.

Ordering code: SAMPLEBOX12


All sample boxes come with a specific brochure with all necessary information about product types, product description, location of the components and electrical performance and characteristics.



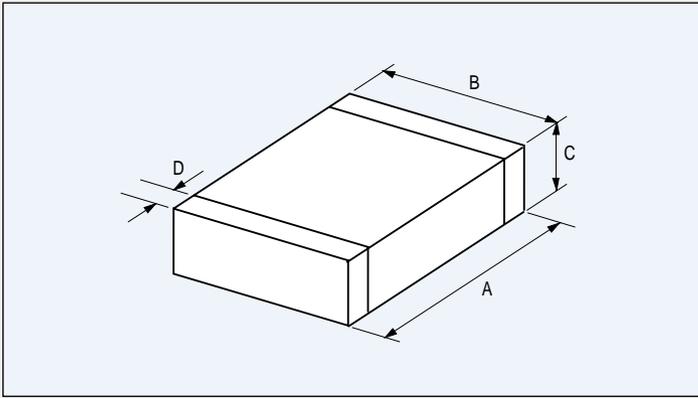

Size	A (mm)	B (mm)	C (mm)	D (mm)	Weight (mg)
0603	1.60 ± 0.15	0.80 ± 0.15	0.80 ± 0.15	0.36 ± 0.15	≈ 5
0805	2.00 ± 0.20	1.25 ± 0.20	0.90 ± 0.20	0.51 ± 0.25	≈ 11
1206	3.20 ± 0.20	1.60 ± 0.20	1.10 ± 0.20	0.51 ± 0.25	≈ 28
1806	4.50 ± 0.25	1.60 ± 0.25	1.60 ± 0.25	0.61 ± 0.25	≈ 55


type number	size	Z@100MHz	R <sub>DC</sub> max (Ω)	I max (mA)
MLS0603-4S7-600 <b>des</b>	0603	60	0.2	300
MLS0603-4S7-101 <b>des</b>	0603	100	0.3	250
MLS0603-4S7-121 <b>des</b>	0603	120	0.3	250
MLS0603-4S7-151 <b>des</b>	0603	150	0.3	250
MLS0603-4S7-301 <b>des</b>	0603	300	0.35	230
MLS0603-4S7-601 <b>des</b>	0603	600	0.45	210
MLS0603-4S7-102 <b>des</b>	0603	1000	0.6	190
MLS0805-4S4-300 <b>des</b>	0805	30	0.1	600
MLS0805-4S4-600 <b>des</b>	0805	60	0.1	600
MLS0805-4S7-121 <b>des</b>	0805	120	0.2	400
MLS0805-4S7-151 <b>des</b>	0805	150	0.3	200
MLS0805-4S7-301 <b>des</b>	0805	300	0.3	200
MLS0805-4S7-601 <b>des</b>	0805	600	0.3	240
MLS0805-4S7-102 <b>des</b>	0805	1000	0.4	200
MLS1206-4S4-300 <b>des</b>	1206	30	0.1	600
MLS1206-4S4-700 <b>des</b>	1206	70	0.1	600
MLS1206-4S4-900 <b>des</b>	1206	90	0.2	400
MLS1206-4S4-121 <b>des</b>	1206	120	0.2	300
MLS1206-4S4-601 <b>des</b>	1206	600	0.5	200
MLS1206-4S7-102 <b>des</b>	1206	1000	0.7	150
MLS1806-4S4-800 <b>des</b>	1806	80	0.1	600
MLS1806-4S4-151 <b>des</b>	1806	150	0.2	500

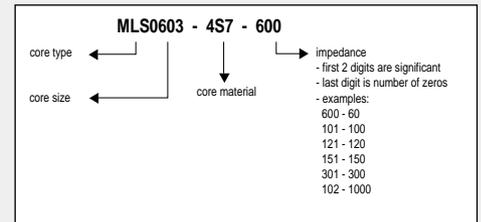

- ◆ R<sub>DC</sub>: resistance of component for DC current
- ◆ Maximum rated current: measure of current capacity of the component. When the maximum rated current is applied, temperature rise shall not exceed 20°C
- ◆ Standard tolerance on impedance is ±25%
- ◆ Other tolerances or electrical specifications can be provided upon request
- ◆ Operating temperature: -55°C - +125°C

# EMI-suppression products

## SMD beads

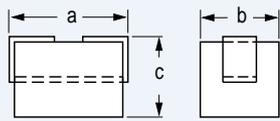

### BDS3/1.8/5.3-3S1

a	b	c
5.3 ± 0.35	3.05 ± 0.15	1.8 max
$ Z _{typ} = 28 \Omega$ (10 MHz)		

### BDS3/1.8/5.3-4S2

a	b	c
5.3 ± 0.35	3.05 ± 0.15	1.8 max
$ Z _{typ} = 38 \Omega$ (100 MHz)		

### BDS3/3/4.6-3S1

a	b	c
4.6 ± 0.3	3.05 ± 0.15	3 max
$ Z _{typ} = 45 \Omega$ (10 MHz)		

### BDS3/3/4.6-4S2

a	b	c
4.6 ± 0.3	3.05 ± 0.15	3 max
$ Z _{typ} = 50 \Omega$ (100 MHz)		

### BDS3/3/8.9-3S1

a	b	c
8.9 ± 0.35	3.05 ± 0.15	3 max
$ Z _{typ} = 80 \Omega$ (10 MHz)		

### BDS3/3/8.9-4S2

a	b	c
8.9 ± 0.35	3.05 ± 0.15	3 max
$ Z _{typ} = 100 \Omega$ (100 MHz)		


### BDS4.6/3/8.9-4S2

a	b	c
8.9 ± 0.35	4.6 ± 0.3	3 max
$ Z _{typ} = 100 \Omega$ (100 MHz)		

Our range of SMD beads replace the well known beads on wire in applications where SMD components are required. They consist of a rectangular ferrite body and a length of flat copper wire, which is inserted through the ferrite and bent around to form two solder pads. The wire is presoldered and complies with solderability test TA (method 1) in IEC 60068-2-58.

Taping method IEC 60286-3 and 481-1.

## SMD common mode chokes

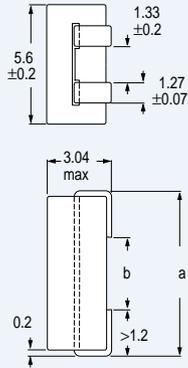

### CMS2-5.6/3/4.8-4S2

$$a = 4.75 \pm 0.3 \text{ mm} / b > 1.1$$


$$|Z|_{typ} = 35 \Omega$$
 (100 MHz)

### CMS2-5.6/3/8.9-4S2

$$a = 8.9 - 0.5 \text{ mm} / b > 5$$

$$|Z|_{typ} = 60 \Omega$$
 (100 MHz)

In SMD Common mode chokes 2 or 4 conductors within a single soft-ferrite block are connected along their lengths by an air gap. Common-mode signals - interference signals passing in the same direction along the input and output channels of a device (an IC for instance) - reinforce the magnetic flux around both conductors, and are therefore attenuated. In contrast, the wanted signal passing along the input and

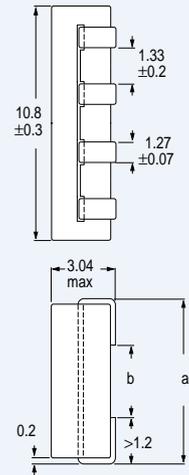

### CMS4-11/3/4.8-4S2

$$a = 4.75 \pm 0.3 \text{ mm} / b > 1.1$$

inner channel	$ Z _{typ} = 23 \Omega$ (100 MHz)
---------------	-----------------------------------

outer channel	$ Z _{typ} = 30 \Omega$ (100 MHz)
---------------	-----------------------------------


### CMS4-11/3/8.9-4S2

$$a = 8.9 - 0.5 \text{ mm} / b > 5$$


inner channel	$ Z _{typ} = 45 \Omega$ (100 MHz)
---------------	-----------------------------------

outer channel	$ Z _{typ} = 60 \Omega$ (100 MHz)
---------------	-----------------------------------

output channels cancel the flux around the conductors and therefore passes unattenuated.

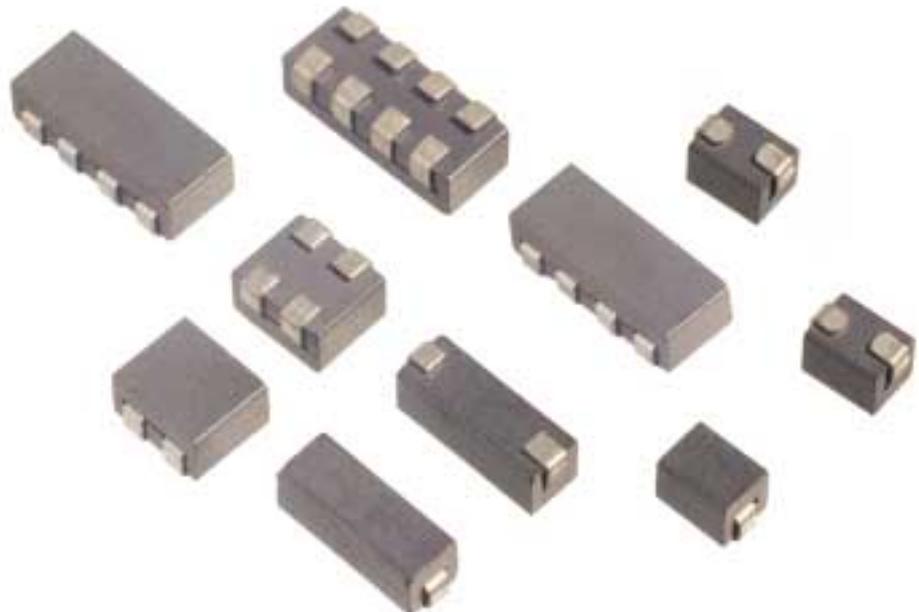


### beads on wire

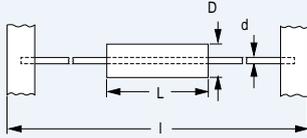

type number	dimensions				Z  <sub>typ</sub> (Ω) at 100 MHz
	D	L	l	d	
<b>BDW3.5/3.5-4S2</b>	3.5 ± 0.2	3.5 - 0.5	64.4	0.65	58
<b>BDW3.5/4.7-4S2</b>	3.5 ± 0.2	4.7 - 0.5	64.4	0.65	75
<b>BDW3.5/5.3-4S2</b>	3.5 ± 0.25	5.25 ± 0.25	64.4	0.64	82
<b>BDW3.5/6-4S2</b>	3.5 ± 0.2	6.0 ± 0.25	64.4	0.65	100
<b>BDW3.5/6.7-4S2</b>	3.5 ± 0.2	6.7 ± 0.25	64.4	0.65	110
<b>BDW3.5/7.6-4S2</b>	3.5 ± 0.2	7.6 ± 0.35	64.4	0.65	131
<b>BDW3.5/8.9-4S2</b>	3.5 ± 0.2	8.9 ± 0.35	64.4	0.65	146
<b>BDW3.5/9.5-4S2</b>	3.5 ± 0.25	9.5 ± 0.3	64.4	0.64	150
<b>BDW3.5/11-4S2</b>	3.5 ± 0.25	11.4 ± 0.4	64.4	0.64	180
<b>BDW3.5/14-4S2</b>	3.5 ± 0.25	13.8 ± 0.5	64.4	0.64	220

Beads-on-wire are suitable to suppress unwanted signals between parts of a PCB. They consist of a suppression bead fixed on a length of wire and taped on a bandolier. The bandolier fits most commonly used automatic mounting machines. The tape complies to tape standards IEC 60286 part 1 and EIA-RS-96-D.

### EMI suppression beads

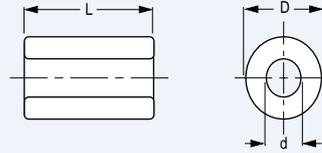

type number		dimensions (mm)			Z  <sub>typ</sub> (Ω) at 10 MHz
		D	d	L	
<b>BD3/0.7/4-3S1</b>	<b>sup</b>	3 ± 0.1	0.7 + 0.1	4 ± 0.2	49
<b>BD5.1/0.8/4-3S1</b>	<b>sup</b>	5.1 - 0.3	0.75 + 0.1	4 ± 0.2	66
<b>BD3/1/10-3S1</b>	<b>sup</b>	3 ± 0.1	1+0.1/- 0.05	10 ± 0.3	91
<b>BD5.1/0.8/10-3S1</b>		5.1 - 0.3	0.75 + 0.1	10 ± 0.3	
<b>BD5.1/1.5/4-3S1</b>		5.1 - 0.3	1.5 + 0.15	4 ± 0.2	40
<b>BD5.1/1.5/10-3S1</b>		5.1 - 0.3	1.5 + 0.15	10 ± 0.3	100
<b>BD5.1/2/4-3S1</b>		5.1 - 0.3	2 + 0.2	4 ± 0.2	30
<b>BD5.1/2/10-3S1</b>	<b>sup</b>	5.1 - 0.3	2 + 0.2	10 ± 0.3	76


type number		dimensions (mm)			Z  <sub>typ</sub> (Ω) at 100 MHz
		D	d	L	
<b>BD1.9/0.8/9.8-4S2</b>	<b>sup</b>	1.9 + 0.2	0.8 + 0.2	9.75 - 0.2	69
<b>BD 5.1/0.8/10-4S2</b>	<b>sup</b>	5.1 - 0.3	0.75 + 0.1	10 ± 0.3	213
<b>BD3/1/4-4S2</b>		3 ± 0.1	1+0.1/- 0.05	4 ± 0.2	48
<b>BD3.5/1.3/3.3-4S2</b>		3.5 ± 0.2	1.3 ± 0.1	3.25 ± 0.25	40
<b>BD3.5/1.3/6-4S2</b>		3.5 ± 0.2	1.3 ± 0.1	6 ± 0.25	60
<b>BD3.5/1.3/13-4S2</b>		3.5 ± 0.2	1.3 ± 0.1	12.7 ± 0.35	125
<b>BD5.1/1.5/4-4S2</b>		5.1 - 0.3	1.5 + 0.15	4 ± 0.2	51
<b>BD5.1/1.5/10-4S2</b>		5.1 - 0.3	1.5 + 0.15	10 ± 0.3	130
<b>BD5.1/2/4-4S2</b>		5.1 - 0.3	2 + 0.2	4 ± 0.2	40
<b>BD5.1/2/7.1-4S2</b>		5.1 - 0.3	2 + 0.2	7.1 ± 0.2	78
<b>BD8/2/4-4S2</b>		8 ± 0.2	2 + 0.2	4 ± 0.2	61
<b>BD5.1/2/10-4S2</b>	<b>sup</b>	5.1 - 0.3	2 + 0.2	10 ± 0.3	100
<b>BD6.4/3/25-4S2</b>		6.35 ± 0.15	2.95 + 0.45	25.4 ± 0.75	200
<b>BD7.7/2.3/7.6-4S2</b>		7.65 - 0.25	2.25 + 0.25	7.55 ± 0.25	92
<b>BD8/3/4-4S2</b>		8 ± 0.2	3 + 0.2	4 ± 0.2	43
<b>BD8/3/10-4S2</b>		8 ± 0.2	3 + 0.2	10 ± 0.3	106

Color code: 4S2 has a flash of yellow paint

# EMI-suppression products

## cable shields

### tubular cable shields

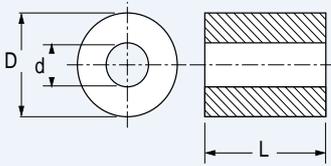

### cable shields for round cable (split)

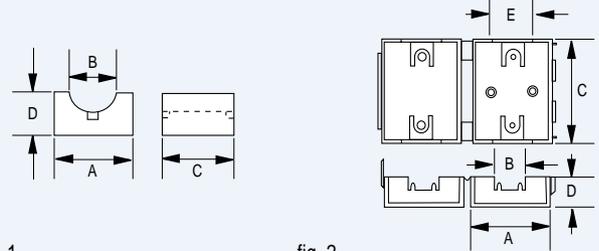


fig. 1

fig. 2

type number	dimensions			IZ <sub>typ</sub> (Ω) at 100 MHz
	D	d	L	
CST7.8/5.3/9.8-3S4 <b>des</b>	7.8 ± 0.2	5.3 + 0.3	9.8 ± 0.2	50
CST8.3/3.5/10-3S4 <b>des</b>	8.3 - 0.4	3.5 + 0.3	10 - 0.6	96
CST9.5/4.8/6.4-4S2 <b>des</b>	9.5 ± 0.25	4.75 ± 0.25	6.35 ± 0.35	50
CST9.5/4.8/10-4S2 <b>des</b>	9.5 ± 0.25	4.75 ± 0.15	10.4 ± 0.25	80
CST9.5/4.8/19-4S2 <b>des</b>	9.5 ± 0.25	4.75 ± 0.15	19.05 ± 0.7	145
CST9.5/5.1/15-3S4 <b>des</b>	9.5 ± 0.3	5.1 ± 0.15	14.5 ± 0.45	110
CST9.7/5/5.1-4S2 <b>des</b>	9.65 ± 0.25	5 ± 0.2	5.05 - 0.45	43
CST14/6.4/29-4S2 <b>des</b>	14.3 ± 0.45	6.35 ± 0.25	28.6 ± 0.75	250
CST14/7.3/29-4S2 <b>des</b>	14.3 ± 0.45	7.25 ± 0.15	28.6 ± 0.75	215
CST16/7.9/14-4S2 <b>des</b>	16.25 - 0.75	7.9 ± 0.25	14.3 ± 0.35	113
CST16/7.9/29-4S2 <b>des</b>	16.25 - 0.75	7.9 ± 0.25	28.6 ± 0.75	213
CST17/9.5/13-4S2 <b>des</b>	17.45 ± 0.4	9.5 ± 0.25	12.7 ± 0.5	88
CST17/9.5/29-3S4 <b>des</b>	17.45 ± 0.35	9.53 ± 0.25	28.55 ± 0.75	200
CST17/11/60-3S4 <b>des</b>	17.2 - 1.2	11 ± 0.5	60 - 2.5	320
CST19/10/29-4S2 <b>des</b>	19 - 0.65	10.15 ± 0.25	28.6 ± 0.75	196
CST19/11/12-3S4 <b>des</b>	19 ± 0.4	10.6 ± 0.3	11.5 ± 0.4	75
CST26/13/29-4S2 <b>des</b>	25.9 ± 0.75	12.8 ± 0.25	28.6 ± 0.8	225
CST29/19/7.5-4S2 <b>des</b>	29 ± 0.75	19 ± 0.5	7.5 ± 0.25	47

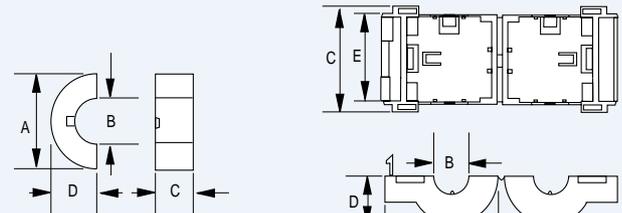


fig. 3


fig. 4

type number	fig.	dimensions					IZ <sub>typ</sub> (Ω) at 100 MHz
		A	B	C	D	E	
CSA15/7.5/29-4S2 <b>des</b>	1	15 ± 0.25	6.6 ± 0.3	28.6 ± 0.8	7.5 ± 0.15		275
nylon case	2	17.9	7.0	32.3	9.2	9.0	
CSA15/7.5/29-4S2-EN <b>des</b>	1+2	17.9	7.0	32.3	9.2	9.0	275
CSA19/9.4/29-4S2 <b>des</b>	1	18.65 ± 0.4	10.15 ± 0.3	28.6 ± 0.8	9.4 ± 0.15		225
nylon case	2	22.1	10.2	32.3	11.7	9.0	
CSA19/9.4/29-4S2-EN <b>des</b>	1+2	22.1	10.2	32.3	11.7	9.0	225
CSA26/13/29-4S2 <b>des</b>	1	25.9 ± 0.5	13.05 ± 0.3	28.6 ± 0.8	12.95 ± 0.25		250
nylon case	2	29	13.4	32.5	14.8	18.0	
CSA26/13/29-4S2-EN <b>des</b>	1+2	29	13.4	32.5	14.8	18.0	250
CSC16/7.9/14-4S2 <b>des</b>	3	15.9 ± 0.4	7.9 ± 0.3	14.3 ± 0.4	7.95 ± 0.2		113
nylon case	4	24.7	7.6	22.8	10.2	17.8	
CSC16/7.9/14-4S2-EN <b>des</b>	3+4	24.7	7.6	22.8	10.2	17.8	113


Cable shields are ideal to suppress high frequency noise on cables. For maximum efficiency the ferrite should be placed as close as possible to the conductors. Therefore we offer several sizes to fit most standard round and flat cables. The split cable shields can be mounted with metal clips or nylon cases without removing connectors.

**cable shields**

**flat cable shields (split)**

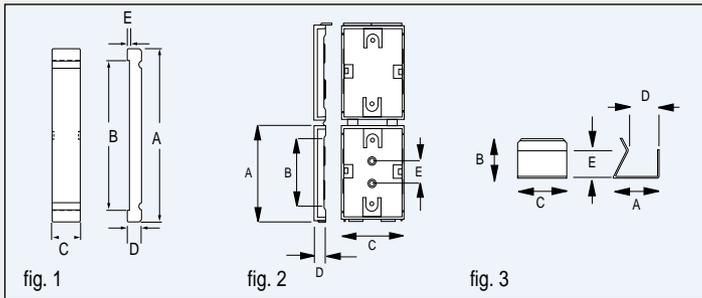

**flat cable shields**

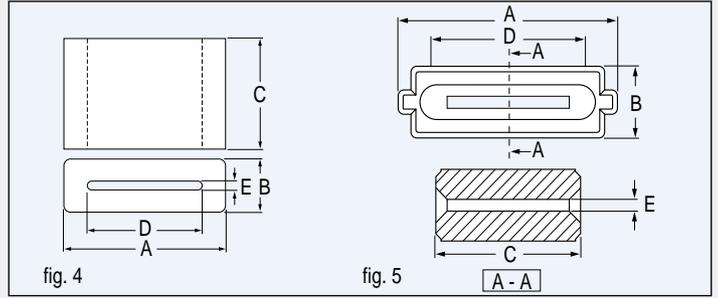


**flat cable shields with matching nylon cases**

type number	fig.	dimensions					IZ <sub>I</sub> typ (Ω) at 100 MHz
		A	B	C	D	E	
CSU45/6.4/29-4S2 <b>des</b>	1	45.1 ±0.75	34.4 ±0.7	28.6 ±0.7	6.35 ±0.25	0.85 ±0.2	225
nylon case	2	49.5	34.3	32.3	8.1	20.0	
CSU45/6.4/29-4S2-EN <b>des</b>	1+2	49.5	34.3	32.3	8.1	20.0	225
CSU76/6.4/29-4S2 <b>des</b>	1	76.2 ±1.5	65.3 ±1.3	28.6 ±0.8	6.35 ±0.25	0.85 ±0.2	215
nylon case	2	80.8	65.5	32.2	8.1	50.8	
CSU76/6.4/29-4S2-EN <b>des</b>	1+2	80.8	65.5	32.2	8.1	50.8	215

type number	fig.	dimensions					IZ <sub>I</sub> typ (Ω) at 100 MHz
		A	B	C	D	E	
CSU76/6.4/13-3S4 <b>des</b>	1	76.2 ±1.5	65.3 ±1.3	12.7 ±0.4	6.35 ±0.25	0.85 ±0.2	110
CSU76/6.4/15-3S4 <b>des</b>	1	76.2 ±1.5	65.3 ±1.3	15.0 ±0.6	6.35 ±0.25	0.85 ±0.2	160
CSU76/6.4/29-3S4*) <b>des</b>	1	76.2 ±1.5	65.3 ±1.3	28.6 ±0.8	6.35 ±0.25	0.85 ±0.2	235
CLI-CSU6.4 <b>des</b>	3	16.1	11.0	12.7	11.4	8.0	


type number	fig.	dimensions					IZ <sub>I</sub> typ (Ω) at 100 MHz
		A	B	C	D	E	
CSF38/12/25-3S4 <b>des</b>	4	38.1 ±1.0	12.1 ±0.35	25.4 ±0.75	26.7 ±0.75	1.9 ±0.35	215
CSF38/12/15-3S4-S <b>des</b>	5	38.5 ±0.6	12.1 ±0.4	25.4 ±0.8	26.8 ±0.8	1.9 ±0.4	196

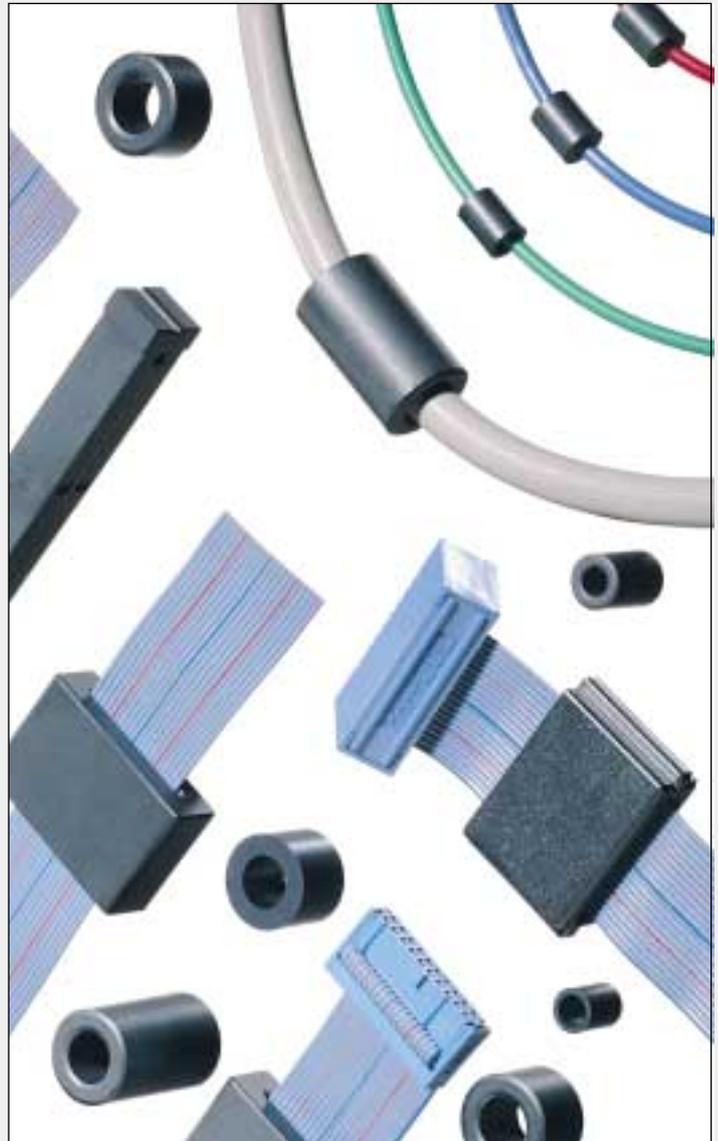

\*) can be supplied with nylon case upon request

# EMI-suppression products

## bobbin cores

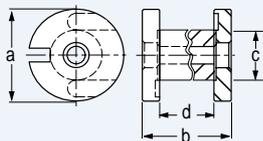

### BC13/4.8/16-3C90 <sup>1)</sup> **sup**

a	b	c	d
12.8 – 0.5	16	4.8 ± 0.2	10
$A_L$ (nH) ≈ 50			

### BC22/12/14-3C90 **sup**

a	b	c	d
22 ± 1	14 ± 1	12 ± 0.3	8.6 ± 0.6
$A_L$ (nH) ≈ 86			

### BC22/12/18-3C90 **sup**

a	b	c	d
22 ± 1	18 ± 1	12 ± 0.3	12.6 ± 0.6
$A_L$ (nH) ≈ 85			

### BC22/12/19-3C90 **sup**

a	b	c	d
22 ± 1	18.5 ± 1	12 ± 0.3	10.5 ± 0.6
$A_L$ (nH) ≈ 91			

### BC22/12/38-3C90 **sup**

a	b	c	d
22 ± 1	38 ± 1.4	12 ± 0.3	30 ± 1.4
$A_L$ (nH) ≈ 74			

### BC23/12/14-3C90 <sup>2)</sup> **sup**

a	b	c	d
22.6 ± 1	14 ± 1	12 ± 0.3	8.6 ± 0.6
$A_L$ (nH) ≈ 92			


Bobbin cores are easy to wind with thick copper wire. Application is mainly as power inductor in output stages of converters or as EMI choke in lines with high DC currents. The magnetic circuit is open, resulting in high current capability, but also in quite some stray flux.

$A_L$  measured with fully wound bobbin

<sup>1)</sup> no central hole, 2 wire slots

<sup>2)</sup> no wire slots

multi hole cores

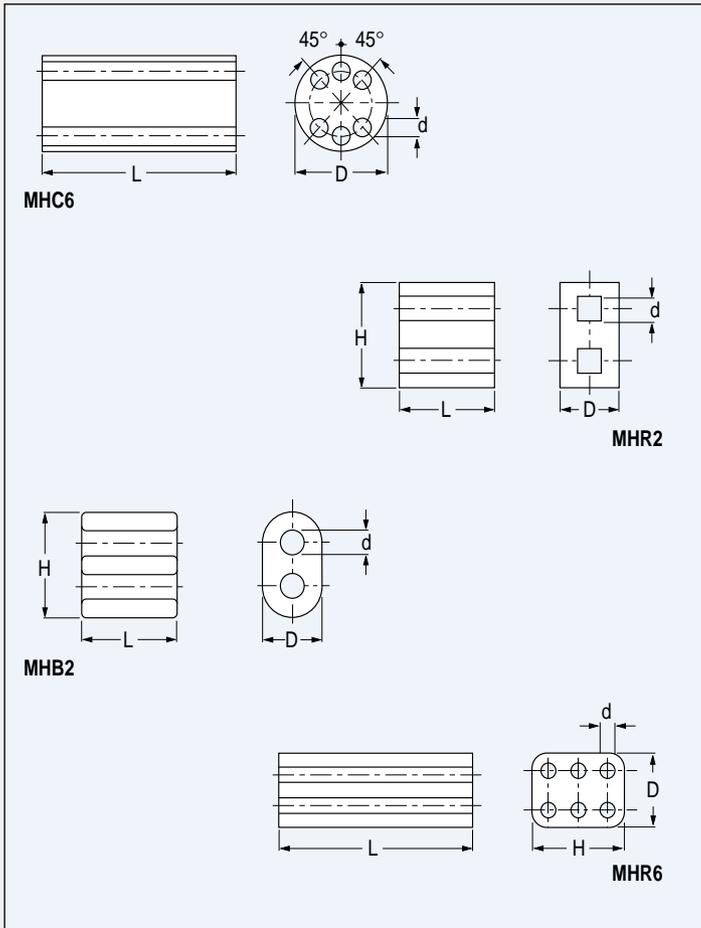

type number	dimensions (mm)			
	D	d	L	H
MHC6-6/10-3S4	6 ± 0.3	0.7 + 0.2	10 ± 0.5	-
MHC6-6/10-4B1	6 ± 0.3	0.7 + 0.2	10 ± 0.5	-
MHC6-6/5-4S2	6 ± 0.3	0.7 + 0.2	5 - 0.2	-
MHB2-14/8.5/8-4B1 <sup>sup</sup>	8.5 - 0.5	3.5 + 0.5	8 ± 0.3	14 ± 0.5
MHB2-14/8.5/14-4B1	8.5 - 0.5	3.5 + 0.5	14 ± 0.4	14 ± 0.5
MHB2-13/8/6-4B1 <sup>1)</sup>	8.0 ± 0.3	3 ± 0.3	6 ± 0.3	13 ± 0.3
MHB2-13/8/6-3C90 <sup>1)</sup>	8.0 ± 0.3	3 ± 0.3	6 ± 0.3	13 ± 0.3
MHR2-11/5.4/11-4A11 <sup>sup</sup>	5.4 ± 0.3	2.0 ± 0.3	10.9 ± 0.3	10.8 ± 0.3
MHR2-11/5.4/11-3C90 <sup>sup</sup>	5.4 ± 0.3	2.0 ± 0.3	10.9 ± 0.4	10.8 ± 0.3
MHR6-6.1/4/10-3B1 <sup>sup</sup>	4 ± 0.2	0.7 + 0.3	10 ± 0.5	6.1 ± 0.3


Multi-hole cores are used for small HF transformers, for voltage or impedance matching in TV, communications, data transmission, instrumentation and similar applications. They are available with 2 and 6 holes (twin cores and six-hole cores), in round and rectangular shapes.

- Summary:
- ◆ wide range of shapes
  - ◆ several materials
  - ◆ for HF matching and suppression

<sup>1)</sup> Chamfered holes and sides.

# EMI-suppression products

rods

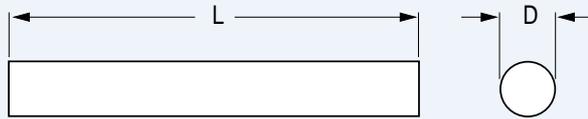

type number			dimensions (mm)	
3B1	3S3	4B1	D	L
ROD2/20-3B1-D <sup>sup</sup>			2 – 0.05	20 – 0.9
		ROD3/15-4B1-D	3 – 0.05	15 – 0.8
	ROD3/20-3S3		3 – 0.3	20 ± 0.4
ROD3/20-3B1-D			3 – 0.05	20 – 0.9
ROD3/25-3B1-D			3 – 0.05	25 – 1.0
	ROD3.3/17-3S3		3.3 ± 0.1	17 ± 0.3
ROD4/15-3B1-D		ROD4/15-4B1-D	4 – 0.05	15 – 0.8
ROD4/25-3B1-D			4 – 0.05	25 – 1.0
	ROD5/20-3S3		5 – 0.30	20 ± 0.5
ROD5/20-3B1-D		ROD5/20-4B1-D <sup>sup</sup>	5 – 0.05	20 – 0.9
	ROD5/25-3S3		5 – 0.30	25 – 1.0
ROD5/25-3B1-D			5 – 0.05	25 – 1.0
ROD5/30-3B1-D		ROD5/30-4B1-D <sup>sup</sup>	5 – 0.05	30 – 1.2
	ROD5.3/18-3S3		5.25 – 0.3	18 ± 0.3
	ROD6/25-3S3		6 – 0.30	25 ± 0.6
	ROD6/30-3S3		6 – 0.30	30 ± 0.9
ROD6/30-3B1-D		ROD6/30-4B1-D <sup>sup</sup>	6 – 0.10	30 – 1.2
		ROD6/40-4B1-D <sup>sup</sup>	6 – 0.10	40 – 1.6
		ROD6/50-4B1-D <sup>sup</sup>	6 – 0.10	50 ± 1.0
	ROD6.5/25-3S3		6.5 – 0.30	25 ± 0.6
	ROD8/25-3S3 <sup>des</sup>		8 – 0.5	25 ± 0.75
ROD8/50-3B1 <sup>sup</sup>		ROD8/50-4B1 <sup>sup</sup>	8 – 0.40	50 ± 1.0
		ROD8/150-4B1 <sup>sup</sup>	8 – 0.40	150 ± 3.0
ROD10/200-3B1 <sup>sup</sup>		ROD10/200-4B1 <sup>sup</sup>	10 – 0.50	200 ± 4.0

Generally, ferrite rods are used as the core of solenoidal chokes. Such a choke can carry a high DC current without being saturated because of the open magnetic circuit. In most cases, the frequency range


will not be limited by the material, but by the coil capacitance. Curvature and mechanical tolerances of the standard range fulfil the requirements of DIN41291 or its equivalent IEC 60233-1966.

The L value and Q-factor are measured (up to 6 mm outer diameter) in a standard coil, according to DIN 41276 or its equivalent IEC 732-1982, and compared with a standard rod.

Summary:

- ◆ for solenoidal coils
- ◆ open circuit, no self shielding
- ◆ not easily saturated by load currents

tubes

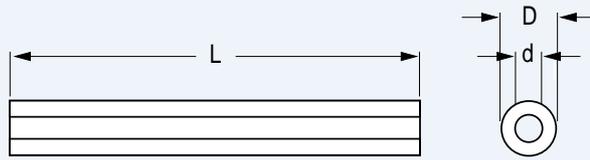

type number			dimensions (mm)		
4B1	3B1	3C90	D	d	L
	TUB3.1/1.3/19-3B1-DL <sup>sup</sup>		3.1 – 0.02	1.3 + 0.2	18.8 – 0.5
	TUB3.5/1.3/7.5-3B1 <sup>sup</sup>		3.5 ± 0.2	1.3 + 0.2	7.5 + 0.5
	TUB3.5/1.3/3-3B1 <sup>sup</sup>		3.5 + 0.1 / – 0.2	1.3 + 0.2	3.0 + 0.5
TUB3.7/1.2/3.5-4B1 <sup>sup</sup>	TUB3.7/1.2/3.5-3B1 <sup>sup</sup>		3.7 – 0.4	1.2 + 0.2	3.5 – 0.5
TUB3.8/2.8/8-4B1 <sup>sup</sup>			3.8 ± 0.1	2.8 ± 0.1	8 ± 0.25
TUB4/1.6/40-4B1 <sup>sup</sup>			4.0 – 0.25	1.6 + 0.15	40 – 1.6
	TUB4/2/5-3B1 <sup>sup</sup>		4 ± 0.2	2 ± 0.2	5 ± 0.5
TUB4/3/9.5-4B1 <sup>sup</sup>			4 ± 0.1	3 + 0.2	9.45 + 0.75
	TUB4.1/2/7-3B1-D <sup>sup</sup>		4.1 ± 0.1	2 + 0.2	7 ± 0.2
	TUB4.1/2/11-3B1-D <sup>sup</sup>		4.1 + 0.1	2 + 0.2	11 ± 0.2
TUB4.1/2/26-4B1 <sup>sup</sup>			4.1 – 0.2	2 + 0.2	25.5 – 1
TUB4.2/2/12-4B1-DL <sup>sup</sup>			4.15 – 0.05	2 + 0.2	12.2 – 0.4
TUB4.3/2/15-4B1 <sup>sup</sup>	TUB4.3/2/15-3B1 <sup>sup</sup>		4.3 – 0.2	2 + 0.2	15.4 – 0.8
	TUB4.3/2/26-3B1 <sup>sup</sup>		4.3 – 0.2	2 + 0.2	25.5 – 1
		TUB5/2/50-3C90 <sup>sup</sup>	5.0 – 0.30	2.0 + 0.2	50 ± 1
	TUB5.3/3/22-3B1 <sup>sup</sup>		5.3 – 0.2	3.0 + 0.2	22.4 – 0.8
	TUB6/3/20-3B1 <sup>sup</sup>	TUB6/3/20-3C90 <sup>sup</sup>	6.0 – 0.3	3.0 + 0.2	20 – 0.9
		TUB6/3/30-3C90 <sup>sup</sup>	6.0 – 0.3	3.0 + 0.2	30 – 1.2
TUB8/4/20-4B1 <sup>sup</sup>	TUB8/4/20-3B1 <sup>sup</sup>		8.0 – 0.4	4.0 + 0.3	20 – 0.9
	TUB8/4/40-3B1 <sup>sup</sup>		8.0 – 0.4	4.0 + 0.3	40 – 1.6
	TUB9.5/6.5/17-3B1		9.5 ± 0.3	6.5 ± 0.2	17 + 0.5 / – 0.4
	TUB10/4.2/20-3B1 <sup>sup</sup>		10.0 – 0.5	4.2 + 0.3	20 – 0.9

Tubes can be used in solenoid coils with almost the same effect as rods. The inner hole is often used to insert wires to make a ferrite coil former. In EMI suppression applications tubes can also be shifted over wires. Because the magnetic flux path is then closed, a steep increase in impedance results.





In such cases however the sensitivity for DC currents is rather high. Curvature and mechanical tolerances of the standard range fulfil the requirements of DIN 41291 or its equivalent IEC 60233-1966.

Summary:

- ◆ full range of standard sizes
- ◆ for general EMI-suppression
- ◆ with wires inserted used as ferrite coil former

# EMI-suppression products

## wide band chokes

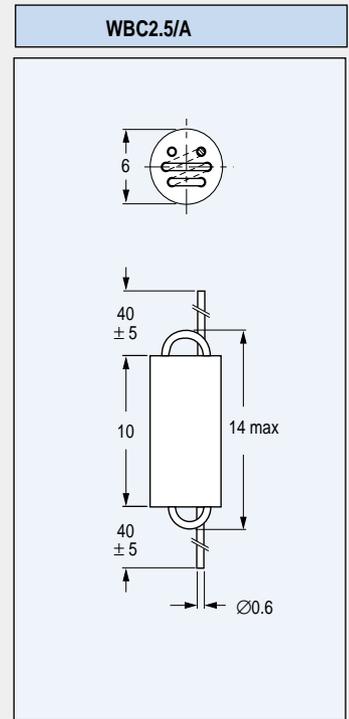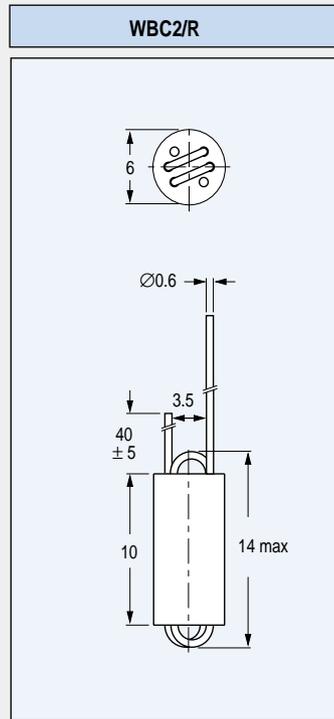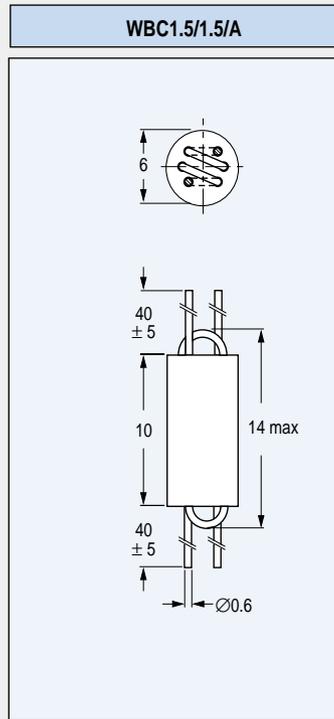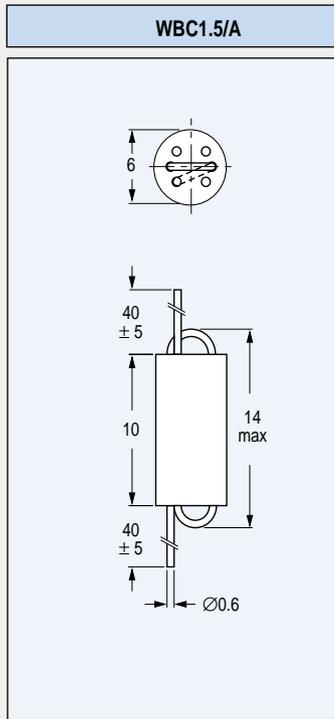

WBC1.5/A-4S2	
Z  at f	
$\Omega$	MHz
213 <sup>1)</sup>	10
400 <sup>1)</sup>	50
470 <sup>1)</sup>	100

WBC1.5/1.5/A-4S2	
Z  at f	
$\Omega$	MHz
213 <sup>3)</sup>	10
400 <sup>3)</sup>	50
470 <sup>3)</sup>	100

WBC2/R-4S2	
Z  at f	
$\Omega$	MHz
300 <sup>1)</sup>	10
650 <sup>1)</sup>	50
600 <sup>1)</sup>	100

WBC2.5/A-4S2	
Z  at f	
$\Omega$	MHz
400 <sup>1)</sup>	10
850 <sup>1)</sup>	50
725 <sup>1)</sup>	100

WBC1.5/A-3S4	
Z  at f	
$\Omega$	MHz
$\geq 300$	120

WBC1.5/1.5/A-3S4	
Z  at f	
$\Omega$	MHz
$\geq 700$ <sup>2)</sup>	50

WBC2.5/A-3S4	
Z  at f	
$\Omega$	MHz
$\geq 600$	50

WBC1.5/A-4B1	
Z  at f	
$\Omega$	MHz
$\geq 350$	250

WBC1.5/1.5/A-4B1	
Z  at f	
$\Omega$	MHz
$\geq 800$ <sup>2)</sup>	110

WBC2.5/A-4B1	
Z  at f	
$\Omega$	MHz
$\geq 700$	180

Wide-band chokes are an alternative to a bead when more impedance or damping is required. In these products the conductor wire is wound through holes in a multi-hole ferrite core, thus separating them physically and reducing coil capacitance. The result is a high impedance over a wide frequency range, a welcome feature for many interference problems. The present design has excellent properties and reliability by keeping the number of electrical interfaces to an absolute minimum.


<sup>1)</sup> Minimum guaranteed impedance is  $|Z|_{typ} - 20\%$ .

<sup>2)</sup> |Z| measured with both windings connected in series.


<sup>3)</sup> Minimum guaranteed impedance is  $|Z|_{typ} - 20\%$ ; measured with one winding.

wide band chokes

WBC2.5/R

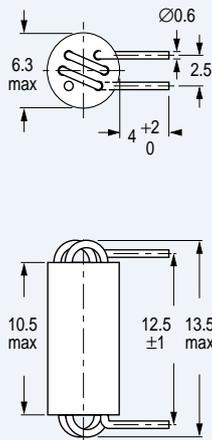


WBC2.5/SP

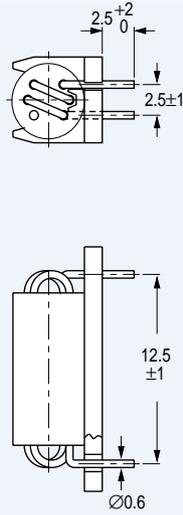

colour code  
3S4 = blue  
4B1 = green

WBC3/R

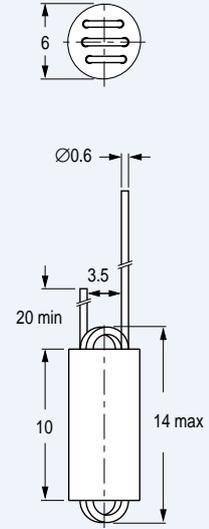

WBC3/R-4S2

Z  at f	
Ω	MHz
500 <sup>1)</sup>	10
1000 <sup>1)</sup>	50
688 <sup>1)</sup>	100

<sup>1)</sup> Minimum guaranteed impedance is |Z|<sub>typ</sub> -20%.

WBC2.5/R-3S4 **sup**

Z  at f	
Ω	MHz
≥ 600	50

WBC2.5/SP-3S4 **sup**

Z  at f	
Ω	MHz
≥ 600	50

WBC2.5/R-4B1 **sup**

Z  at f	
Ω	MHz
≥ 700	75

WBC2.5/SP-4B1 **sup**

Z  at f	
Ω	MHz
≥ 700	75

WBC3/R-3S4

Z  at f	
Ω	MHz
≥ 650	63

WBC3/R-4B1

Z  at f	
Ω	MHz
≥ 800	110



# Specialty ferrite materials and applications

property	conditions				particle accelerators					
	symbol	f (kHz)	$\hat{B}$ or H	T (°C)	unit	4E2	4M2	4B3	8C12	8C11
$\mu_i$ ( $\pm 20\%$ )	< 10	< 0.1mT	25			25	140	300	900	1200
B	10	250A/m	100	mT	$\approx 150$	$\approx 150$	$\approx 250$	$\approx 150$	$\approx 200$	
		3000A/m			$\approx 320$	$\approx 300$	$\approx 400$	$\approx 270$	$\approx 300$	
H <sub>c</sub>	10		25	A/m	$\approx 400$	$\approx 100$	$\approx 60$	$\approx 30$	$\approx 20$	
B <sub>r</sub>	10		25	mT	$\approx 200$	$\approx 100$	$\approx 200$	$\approx 110$	$\approx 150$	
T <sub>c</sub>				°C	$\geq 400$	$\geq 200$	$\geq 250$	$\geq 125$	$\geq 125$	
$\rho$	DC		25	$\Omega$ m	$\approx 10^5$	$\approx 10^5$	$\approx 10^5$	$\approx 10^5$	$\approx 10^5$	
density				kg/m <sup>3</sup>	$\approx 4000$	$\approx 5000$	$\approx 5000$	$\approx 5100$	$\approx 5100$	
ferrite type					NiZn	NiZn	NiZn	NiZn	NiZn	

Properties measured on sintered, unground ring cores of dimensions  $\varnothing 25 \times \varnothing 15 \times 10$  mm which are not subjected to external stresses.

Products generally comply with the material specification. However deviations may occur due to shape, size and grinding operations etc. Specified product properties are given in the data sheets or product drawings.

## Accelerator cores and pulse shapers

Scientific particle accelerators generally use large ferrite rings to tune cavities and concentrate the beam. Ferrite pole pieces, often called kicker magnets, concentrate the magnetic flux bursts which deflect the beam into experiment chambers. Ferrite rings on supply lines of e.g. short pulsed radar equipment, delay current rise until they saturate causing very steep pulses.

Ferrite choice	
frequency range	
< 1 MHz	8C11, 8C12
< 10 MHz	4B3, 4M2
< 100 MHz	4E2

## Machined ferrite products







### Machined ferrites and specialty shapes

We stock blocks of most of our material grades and are able to machine all sorts of prototype cores from these blocks. Very close tolerances can be realized, if required.

Ferrites are very hard and brittle and, therefore, difficult to work. Machining and grinding ferrites and similar materials to micron precision places stringent requirements on machines and men. To attain optimum standards requires very close cooperation between us and the manufacturers of the machines and the machine tools we use.



There are several reasons to go for machined ferrite cores. Sometimes samples are required on very short notice, while pressing tools are not yet available. On other occasions only a limited number of cores will be needed and it is not worthwhile to make a tool at all. Cores can be so complicated or large that machining is the only viable solution.

The following drawings provide a good impression of the variety of cores we have produced. For some of the cores we also have pressing tools available.

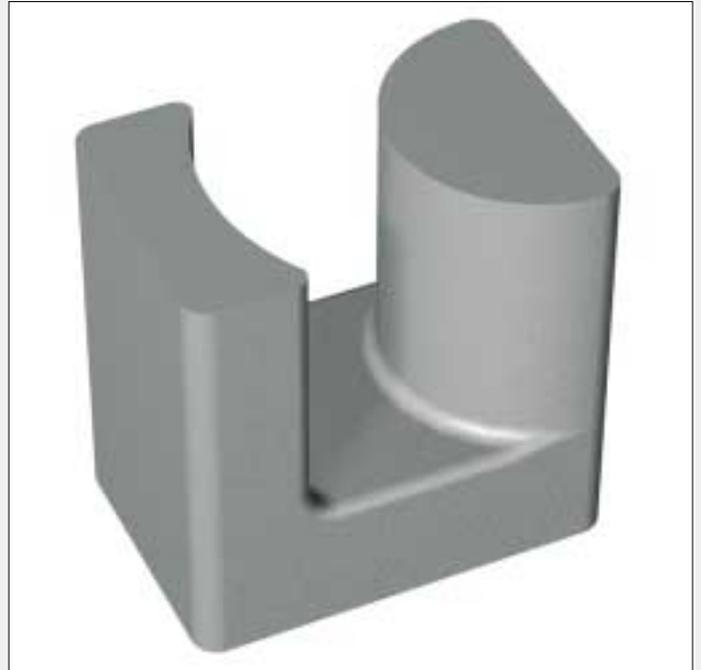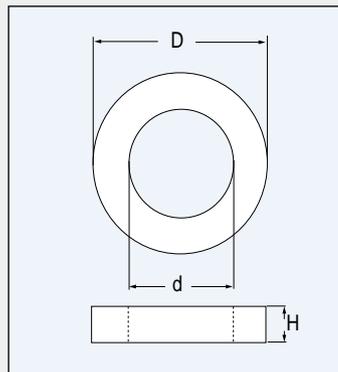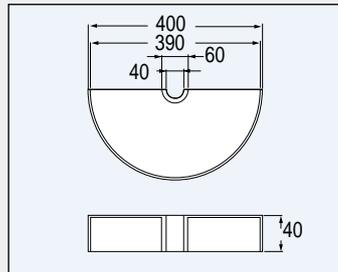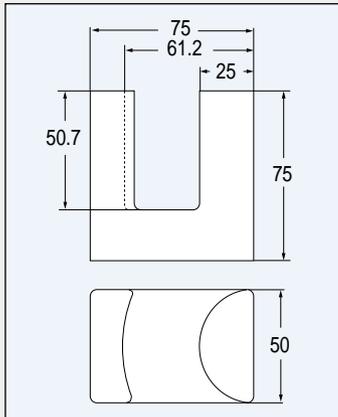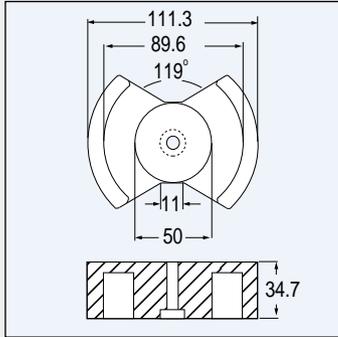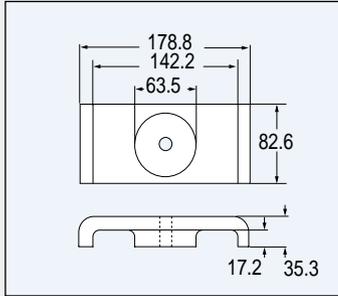

# Specialty ferrites

## Ferrite toroids for particle accelerators

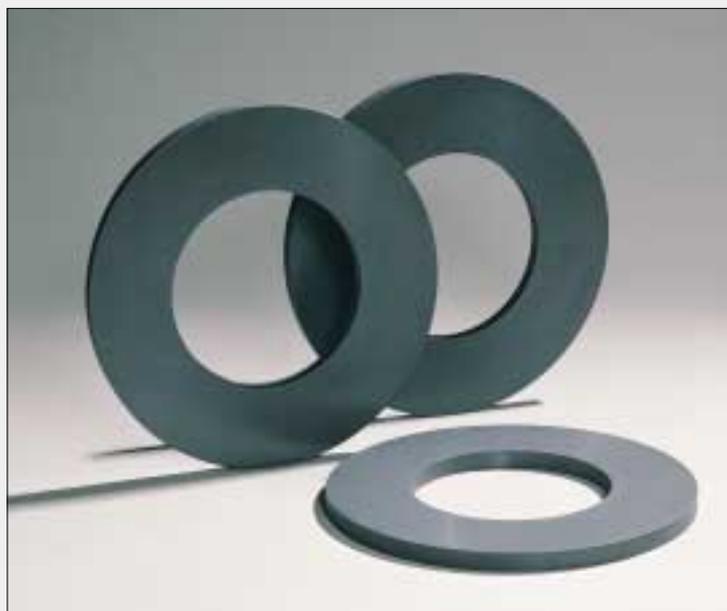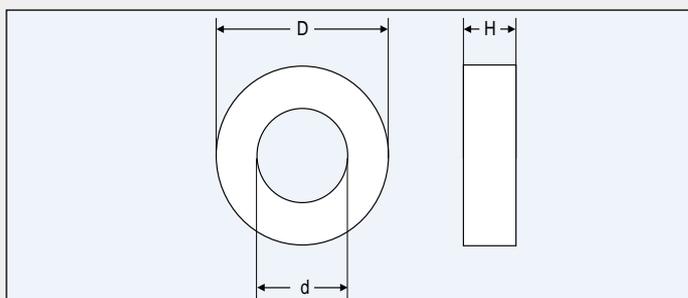

type number	D	d	H	mass (g)
T76/38/13	76.2 ± 0.1	38.1 ± 0.1	12.7 ± 0.1	≈ 220
T170/110/20	170 ± 0.2	110.2 ± 0.2	20 ± 0.2	≈ 1300
T240/160/20	240 ± 0.3	160 ± 0.3	20 ± 0.3	≈ 2500
T498/270/25	498 ± 0.1	270 ± 0.2	25 ± 0.2	≈ 17 000
T498/300/25	498 ± 0.1	300 ± 0.2	25 ± 0.2	≈ 15 000
T500/240/25	500 ± 2	240 ± 0.2	25 ± 0.2	≈ 19 000
T500/300/25	500 ± 0.1	300 ± 0.1	25 ± 0.1	≈ 16 000

core type	4M2	4B3	8C11	8C12
T76/38/13	♦		♦	♦
T170/110/20			♦	
T240/160/20			♦	
T498/270/25				♦
T498/300/25				♦
T500/240/25		♦		
T500/300/25	♦			

### Our product range

Our range of large ring cores and blocks was developed especially for use in scientific particle accelerators. Applications include kicker magnets and acceleration stations. Dynamic behaviour under pulse conditions is important for both applications, so special ferrite grades are optimized for low losses at high flux densities. These large rings have also been used successfully in delay lines for very high powers such as in pulsed lasers or radar equipment. Sizes other than those mentioned in the tables can be made on request.

- ♦ standard range of sizes
- ♦ optimized grades for particle accelerators
- ♦ other sizes on request