



电子元器件系列 (中国.厦门)

*www.rf-china.com* RF-Micom co.,Ltd

**EMail:sales@rf-china.com**

**Telephone:0086-592-5713956 Fax:5201617**

Part Number	Max. Input Voltage (V)	Output Voltage Options (V)								Adjustable (Max. Output) (V)	Output Accuracy (%)	Max. $V_{DROPOUT}$ @ $I_{LOAD}$	No Load Current ( $\mu$ A)	Reference Bypass	Shutdown Option	Standby Mode	Error Flag Output	Over Current Circuit Protection	Thermal Protection	Package
		2.5	2.7	2.85	3.0	3.3	3.6	4.0	5.0											
IMP2014	6.5	●	●	●	●	●	●	●			0.50	70mV@50mA	33	●	●			●	●	SOT-23A-5
IMP2015	6.5	●	●	●	●	●	●	●			0.50	160mV@100mA	33	●	●			●	●	SOT-23A-5
IMP2054	6.5	●	●	●	●	●	●	●			0.50	70mV@50mA	33		●		●	●	●	SOT-23A-5
IMP2055	6.5	●	●	●	●	●	●	●			0.50	160mV@100mA	33		●		●	●	●	SOT-23A-5
IMP2070	6.5									5.5		70mV@50mA	33		●			●	●	SOT-23A-5
IMP882*	11.5								●	11.5	5	640mV@200mA	11			●		●	●	8-pin, DIP and SO
IMP883*	11.5					●				11.5	5	240mV@200mA	11		●			●	●	8-pin, DIP and SO
IMP884*	11.5					●				11.5	5	640mV@200mA	11		●			●	●	8-pin, DIP and SO
IMP2071	6.5									5.5	0.50	160mV@100mA	33		●			●	●	SOT-23A-5
IMP2185	6.5	●	●	●	●	●	●	●			0.50	250mV@150mA	33	●				●	●	SOT-23A-5
IMP2186	6.5	●	●	●	●	●	●	●			0.50	250mV@150mA	33		●		●	●	●	SOT-23A-5
IMP2187	6.5									5.5	0.50	250mV@150mA	33		●			●	●	SOT-23A-5
IMP37	5.5	●			●	●					1	0.95V @ 0.8A	36					●	●	3-pin, SOT-223, 3-pin, TO-263

\* The IMP882/3/4 are available with adjustable (A) and fixed (F) voltage outputs.

## Low Dropout Positive Voltage Regulators

- 800mA
- 2.5V, 3.0V and 3.3V Output

The IMP37 series of Low Dropout (LDO) three-terminal voltage regulators feature guaranteed low dropout voltages at currents up to 0.8A. The IMP37 regulator family dropout voltage is guaranteed to be 0.95V or lower at 0.8A. At 100mA, the maximum dropout voltage is 0.8V. Compared with "1117" type LDOs, the IMP37 has a 20% lower dropout voltage.

Three fixed output voltages are offered: 2.5V, 3.0V and 3.3V. Output voltages are factory trimmed to within 1% of the nominal value.

In addition to low dropout voltages, the IMP37 family features greatly reduced quiescent operating current. The 75µA maximum specification represents an over 100 times improvement over competitive devices.

Devices are short circuit protected, and a thermal protection circuit shuts the regulator off should the junction temperature exceed 165°C.

The IMP37 is available in low-profile plastic SOT-223 and TO-263 packages and are pin compatible with fixed "1117" devices.


### Key Features

- ◆ Low Dropout Voltage
  - 0.8V maximum at 100mA
  - 0.95V maximum at 800mA
  - 20% lower dropout voltage than "1117" LDO regulators
- ◆ Guaranteed Low Dropout Voltage at Multiple Current Levels
- ◆ 1% Trimmed 2.5V, 3.0V and 3.3V Outputs
- ◆ Reduced Quiescent Current: 75µA Maximum
- ◆ Short Circuit and Thermal Protection
- ◆ Space Saving SOT-223 Surface Mount Package
- ◆ "1117" Pin Compatible



### Applications

- ◆ High-efficiency linear power supplies
- ◆ Post regulator for switching supplies
- ◆ 5V to 3.3V linear regulators
- ◆ USB hubs
- ◆ Battery chargers
- ◆ Routers, ISDN/DSL modems

### Block Diagram

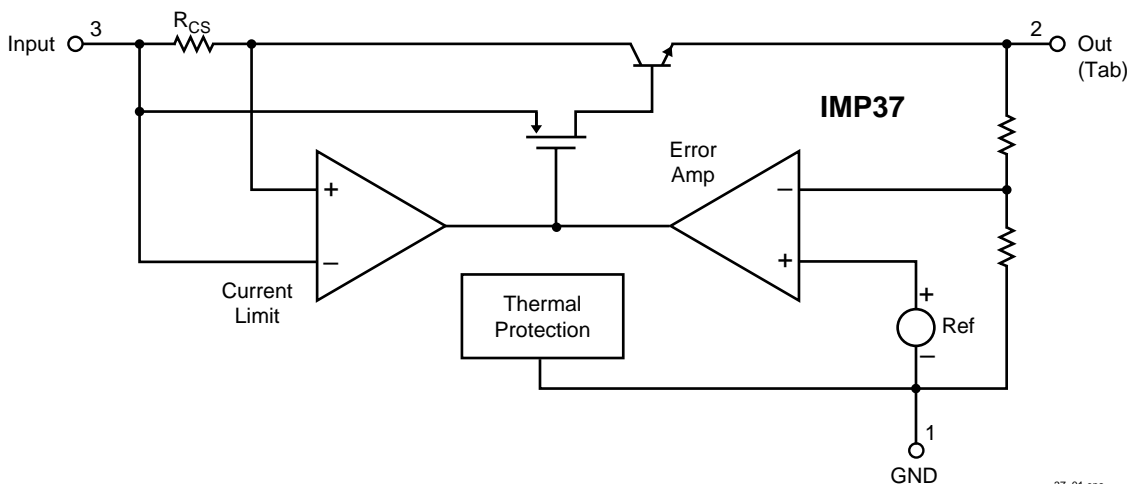

## Pin Configuration

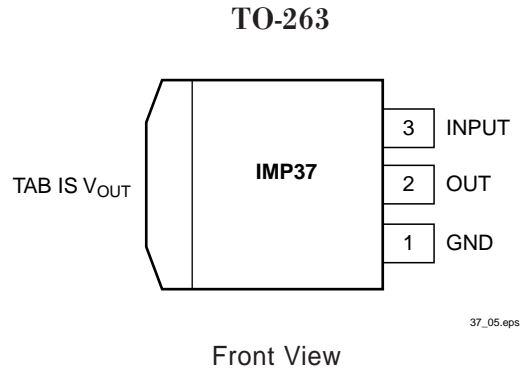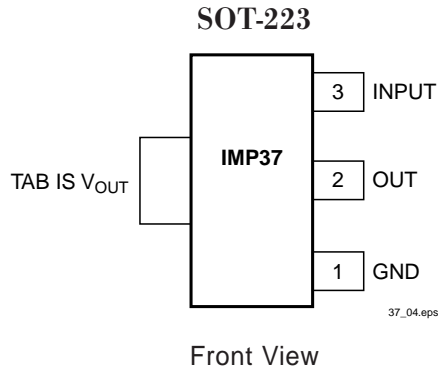

## Pin Descriptions

Pin Number	Name	Function
1	GND	Ground Pin
2	OUT	Output Voltage
3	INPUT	Input Voltage
TAB	TAB	Output Voltage

37\_Table03.eps

## Package Marking Code

Part Number	Package	Device Marking
IMP37-25JST	SOT-223	3725
IMP37-30JST	SOT-223	3730
IMP37-33JST	SOT-223	3733
IMP37-25JCM	TO-263	3725JCM
IMP37-30JCM	TO-263	3730JCM
IMP37-33JCM	TO-263	3733JCM

37\_Table05.eps

## Ordering Information

Output Options			Part Ordering Number	
Voltage	Maximum Quiescent Current	Dropout Voltage at 800mA	SOT-223 Package	TO-263 Package
2.5V	75µA	0.95V	IMP37-25JST	IMP37-25JCM
3.0V	75µA	0.95V	IMP37-30JST	IMP37-30JCM
3.3V	75µA	0.95V	IMP37-33JST	IMP37-33JCM

37\_106.eps

Note: Tape and reel shipping is available for the SOT-223 and TO-263 packages. Append the TAPE AND REEL designation "/T" to the ordering part number for tape and reel devices. For example, the IMP37-25JST/T is a 2.5V SOT-223 packaged device shipped in reels.

## Absolute Maximum Ratings

Input Voltage ..... 7V  
 Operating Junction Temperature ..... 0°C to 150°C

Storage Temperature Range ..... -65°C to +150°C  
 Lead Temperature (Soldering) ..... 300°C for 10 seconds

*These are stress ratings only and functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability. All voltages are with respect to ground.*

## Electrical Characteristics

Specifications apply over the junction operating temperature range of  $T_J = 0^\circ\text{C}$  to  $+125^\circ\text{C}$  unless otherwise noted.


Parameter	Symbol	Suffix	Conditions	Min	Typ	Max	Units
Output Voltage	$V_{OUT}$	-25	$I_{OUT} = 10\text{mA}$ , $V_{IN} = 4.85\text{V}$ , $T_J = 25^\circ\text{C}$	2.475	2.5	2.525	V
			$10\text{mA} \leq I_{OUT} \leq I_{MAX}$ , $4.25\text{V} \leq V_{IN} \leq 5.5\text{V}$	2.45	2.5	2.55	
		-30	$I_{OUT} = 10\text{mA}$ , $V_{IN} = 5\text{V}$ , $T_J = 25^\circ\text{C}$	2.97	3.00	3.03	
			$10\text{mA} \leq I_{OUT} \leq I_{MAX}$ , $4.75\text{V} \leq V_{IN} \leq 5.5\text{V}$	2.94	3.00	3.06	
		-33	$I_{OUT} = 10\text{mA}$ , $V_{IN} = 5\text{V}$ , $T_J = 25^\circ\text{C}$	3.267	3.30	3.333	
			$10\text{mA} \leq I_{OUT} \leq I_{MAX}$ , $4.75\text{V} \leq V_{IN} \leq 5.5\text{V}$	3.235	3.30	3.365	
Line Regulation (Note 1)		-25	$I_{OUT} = 10\text{mA}$ , $4.25\text{V} \leq (V_{IN}) \leq 5.5\text{V}$		12	19	mV
		-30	$I_{OUT} = 10\text{mA}$ , $4.5\text{V} \leq V_{IN} \leq 5.5\text{V}$		12	19	
		-33	$I_{OUT} = 10\text{mA}$ , $4.5\text{V} \leq V_{IN} \leq 5.5\text{V}$		12	19	
Line Regulation (Note 1)		-25	$I_{OUT} = 10\text{mA}$ , $4.25\text{V} \leq (V_{IN}) \leq 5.5\text{V}$ , $T_A = 25^\circ\text{C}$		2.8	4.3	mV
		-30	$I_{OUT} = 10\text{mA}$ , $4.5\text{V} \leq V_{IN} \leq 5.5\text{V}$ , $T_A = 25^\circ\text{C}$		2.8	4.3	
		-33	$I_{OUT} = 10\text{mA}$ , $4.5\text{V} \leq V_{IN} \leq 5.5\text{V}$ , $T_A = 25^\circ\text{C}$		2.8	4.3	
Load Regulation (Note 1)		-25	$V_{IN} = 4.25\text{V}$ , $5\text{mA} \leq I_{OUT} \leq 800\text{mA}$		25	30	mV
		-30	$V_{IN} = 4.75\text{V}$ , $5\text{mA} \leq I_{OUT} \leq 800\text{mA}$		25	30	
		-33	$V_{IN} = 4.75\text{V}$ , $5\text{mA} \leq I_{OUT} \leq 800\text{mA}$		25	30	
Dropout Voltage (Note 2)		-xx	$I_{OUT} = 100\text{mA}$			0.8	V
			$I_{OUT} = 800\text{mA}$			0.95	
Current Limit	$I_{OUT(MAX)}$	-xx	$T_J = 25^\circ\text{C}$	800	950	1200	mA
Minimum Load Current		-xx				5.0	mA
Quiescent Current	$I_Q$	-xx	$V_{IN} \leq 6\text{V}$		36	75	$\mu\text{A}$
Thermal Regulation			$T_A = 25^\circ\text{C}$ , 30ms Pulse		0.01	0.1	%/W
Ripple Rejection			$f_{RIPPLE} = 120\text{Hz}$ , $V_{IN} = 5\text{V}$ , $T_A = 25^\circ\text{C}$ $V_{RIPPLE} = 1\text{Vp-p}$ , $I_{LOAD} = 10\text{mA}$	51	54		dB
Temperature Stability					0.5		%
Long Term Stability			$T_A = 125^\circ\text{C}$ , 1000 Hrs		0.3		%
RMS Output Noise			(% of $V_{OUT}$ ), $10\text{Hz} \leq f \leq 10\text{kHz}$ , $T_J = 25^\circ\text{C}$		0.003		%
Thermal Resistance			Junction-to-Case at TAB (TO-223)		15		$^\circ\text{C/W}$
			Junction-to-Case at TAB (TO-263)		10		

Notes: 1. See thermal regulation specification for changes in output voltage due to heating effects. Load regulation and line regulation are measured with low duty cycle pulse testing to maintain a constant junction temperature.

2. Dropout voltage is specified over the full output current range. Dropout voltage is defined as the minimum input/output differential measured at the specified output current.

3. Minimum load current is defined as the minimum output current required to maintain regulation.

## Pin Configuration

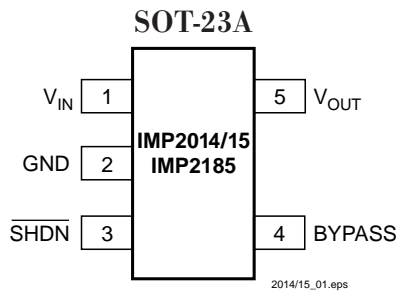

## Pin Descriptions

Pin Number	Name	Function
1	V <sub>IN</sub>	Unregulated supply input.
2	GND	Ground terminal.
3	SHDN	Shutdown control input. A shutdown mode is entered when SHDN is a logic LOW. During shutdown the output voltage falls to 0V and quiescent current drops to 2.0μA.
4	BYPASS	Reference bypass input. A capacitor connected from the BYPASS pin to ground reduces the noise present on the internal reference and enhances PSRR
5	V <sub>OUT</sub>	Output voltage

2014/15\_01.eps

## Ordering Information

Part Number*	Package	Output Voltage (V)	Output Current (mA)	Shutdown Pin	Adjust Pin	OKAY Flag Output	Reference Bypass Pin	Package Marking			
								A	B	C	D
IMP2014-2.5JUK/T	SOT23A-5	2.5	60	●			●	M	A	x	x
IMP2014-2.7JUK/T	SOT23A-5	2.7	60	●			●	M	B	x	x
IMP2014-2.85JUK/T	SOT23A-5	2.85	60	●			●	M	C	x	x
IMP2014-3.0JUK/T	SOT23A-5	3.0	60	●			●	M	D	x	x
IMP2014-3.3JUK/T	SOT23A-5	3.3	60	●			●	M	E	x	x
IMP2014-3.6JUK/T	SOT23A-5	3.6	60	●			●	M	F	x	x
IMP2014-4.0JUK/T	SOT23A-5	4.0	60	●			●	M	G	x	x
IMP2015-2.5JUK/T	SOT23A-5	2.5	110	●			●	O	A	x	x
IMP2015-2.7JUK/T	SOT23A-5	2.7	110	●			●	O	B	x	x
IMP2015-2.85JUK/T	SOT23A-5	2.85	110	●			●	O	C	x	x
IMP2015-3.0JUK/T	SOT23A-5	3.0	110	●			●	O	D	x	x
IMP2015-3.3JUK/T	SOT23A-5	3.3	110	●			●	O	E	x	x
IMP2015-3.6JUK/T	SOT23A-5	3.6	110	●			●	O	F	x	x
IMP2015-4.0JUK/T	SOT23A-5	4.0	110	●			●	O	G	x	x
IMP2185-2.5JUK/T	SOT23A-5	2.5	160	●			●	X	A	x	x
IMP2185-2.7JUK/T	SOT23A-5	2.7	160	●			●	X	B	x	x
IMP2185-2.85JUK/T	SOT23A-5	2.85	160	●			●	X	C	x	x
IMP2185-3.0JUK/T	SOT23A-5	3.0	160	●			●	X	D	x	x
IMP2185-3.3JUK/T	SOT23A-5	3.3	160	●			●	X	E	x	x
IMP2185-3.6JUK/T	SOT23A-5	3.6	160	●			●	X	F	x	x
IMP2185-4.0JUK/T	SOT23A-5	4.0	160	●			●	X	G	x	x

xx = Date Code

\* /T indicates Tape and Reel

2014/15\_03.eps

## Absolute Maximum Ratings

Input Voltage ..... 7V  
 Output Voltage ..... -0.3V to  $V_{IN} + 0.3V$   
 Maximum Voltage on Any Pin ..... -0.3V to  $(V_{IN} + 0.3V)$   
 Shutdown Voltage ( $\overline{SHDN}$ ) .....  $\overline{SHDN} \leq V_{IN} + 0.3V$

*These are stress ratings only and functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability. All voltages are with respect to ground.*

Operating Junction Temperature Range ...  $-40^{\circ}C < T_J < 125^{\circ}C$   
 Storage Temperature .....  $-65^{\circ}C$  to  $150^{\circ}C$   
 Power Dissipation ..... Internally limited

Note:  $T_J$  = Junction Temperature,  $T_A$  = Ambient Temperature

## Electrical Characteristics

$V_{IN} = V_{OUT} + 1V$ ,  $I_L = 100\mu A$ ,  $C_L = 1\mu F$ ,  $\overline{SHDN} > V_{IH}$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted. **Bold/blue** specifications apply for junction temperature range  $-40^{\circ}C < T_J < 125^{\circ}C$ .

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Input Voltage Range	$V_{IN}$	$0^{\circ}C < T_J < 125^{\circ}C$			<b>6.50</b>	V
		$-40^{\circ}C < T_J < 125^{\circ}C$			<b>6.50</b>	
Maximum Output Current	$I_{OMAX}$	IMP2014	<b>60</b>			mA
		IMP2015	<b>110</b>			
		IMP2185	<b>160</b>			
Fixed Output Voltage	$V_{OUT}$	Note 1	<b><math>V_R - 2.5\%</math></b>	$V_R \pm 0.5\%$	<b><math>V_R + 2.5\%</math></b>	V
Dropout Voltage (Note 2)	$V_{IN} - V_O$	$I_L = 100\mu A$		1		mV
		$I_L = 20mA$		17	<b>23</b>	
		$I_L = 50mA$		60	<b>70</b>	
		$I_L = 100mA$ (IMP2015, IMP2185)		90	<b>160</b>	
		$I_L = 150mA$ (IMP2185)		143	<b>250</b>	
Quiescent Current (Ground Current)		No load		33	<b>50</b>	$\mu A$
Shutdown Supply Current	$I_{INSD}$	$\overline{SHDN} = 0V$ $T_J \leq 25^{\circ}C$		0.2	2	$\mu A$
Output Temperature Coefficient				40		ppm/ $^{\circ}C$
Thermal Regulation				0.04		%/W
Line Regulation		$V_R + 1V \leq V_{IN} \leq 6V$		0.0375	<b>0.35</b>	%

- Notes: 1.  $V_R$  is the regulated output voltage: 2.5V, 2.7V, 2.85V, 3.0V, 3.3V, 3.6V or 4.0V.  
 2. Dropout Voltage is defined as the difference between IN and OUT when  $V_R$  drops 2% below its nominal value.  
 3. Specifications which would otherwise be affected by self-heating of the die are tested at a constant die temperature by using low duty cycle pulse testing.  
 3. PSRR guaranteed by design.

## Electrical Characteristics

$V_{IN} = V_{OUT} + 1V$ ,  $I_L = 100\mu A$ ,  $C_L = 1\mu F$ ,  $\overline{SHDN} > V_{IH}$ ,  $T_A = 25^\circ C$ , unless otherwise noted. **Bold/blue** specifications apply for junction temperature range of  $-40^\circ C < T_J < 125^\circ C$ .

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Load Regulation: IMP2014		$I_L = 100\mu A$ to 50mA		0.11	<b>0.5</b>	%
		$I_L = 100\mu A$ to 100mA		0.16	<b>1.0</b>	
		$I_L = 100\mu A$ to 150mA		0.65	<b>1.5</b>	
Thermal Shutdown Die Temperature				150		$^\circ C$
Thermal Shutdown Hysteresis				12		$^\circ C$
Ripple Rejection	PSRR	$V_{IN} \geq (V_O + 1V) \pm 0.25V$ $C_O = 3.3\mu F$ ceramic $C_{BYPASS} = 0.01\mu F$	Freq. = 1kHz		60	dB
			Freq. = 10kHz		47	
			Freq. = 1MHz		34	
Output Noise		300Hz to 50kHz No bypass capacitor $I_L = 50mA$ (IMP2014) $I_L = 100mA$		280		$\mu V_{RMS}$
		300Hz to 50kHz $C_{BYPASS} = 0.01\mu F$ $I_L = 50mA$ (IMP2014) $I_L = 100mA$		60		$\mu V_{RMS}$
SHDN Input HIGH Threshold		$2.5V \leq V_{IN} \leq 6.5V$	<b>45</b>			% of $V_{IN}$
SHDN Input LOW Threshold		$2.5V \leq V_{IN} \leq 6.5V$			<b>15</b>	% of $V_{IN}$
Reverse Current into $V_{OUT}$		$V_{(IN)} < V_{(OUT)}$ SHDN = HIGH = $V_{IN}$		2.0		mA
		$V_{(IN)} < V_{(OUT)}$ SHDN = LOW		2.7		$\mu A$
Output Current Limit				350	<b>600</b>	mA

Notes: 1.  $V_R$  is the regulated output voltage: 2.5V, 2.7V, 2.85V, 3.0V, 3.3V, 3.6V or 4.0V.


2. Dropout Voltage is defined as the difference between IN and OUT when  $V_R$  drops 2% below its nominal value.

3. Specifications which would otherwise be affected by self-heating of the die are tested at a constant die temperature by using low duty cycle pulse testing.

4. PSRR guaranteed by design.




**Typical Characteristics**

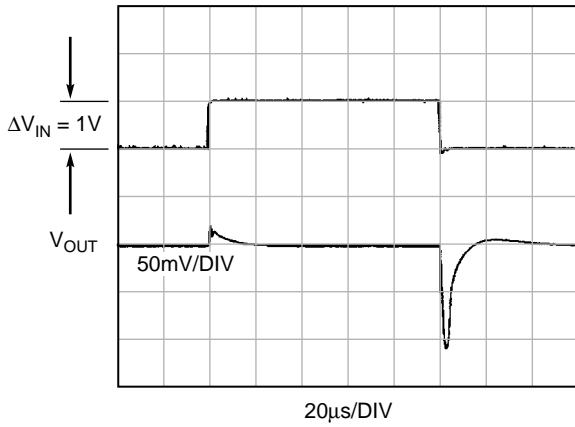


2014/15\_12.eps

**Figure 1. Line Transient Response**

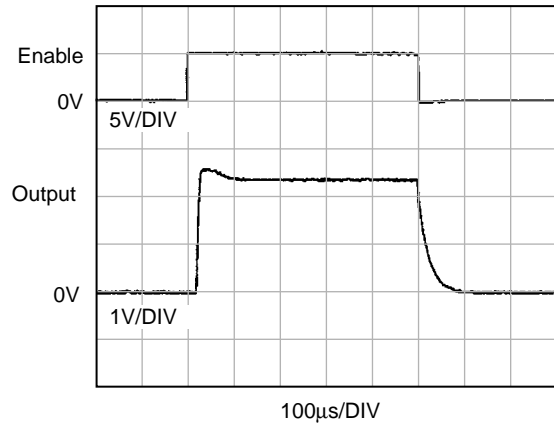


2014/15\_13.eps

**Figure 2. Enable Input Response**

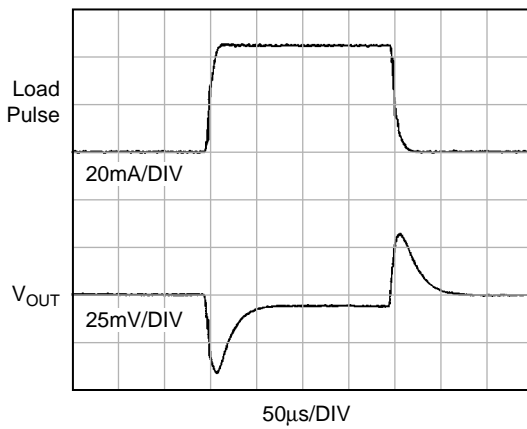


2014/15\_09.eps

**Figure 3. Load Transient Response (50mA Step)**

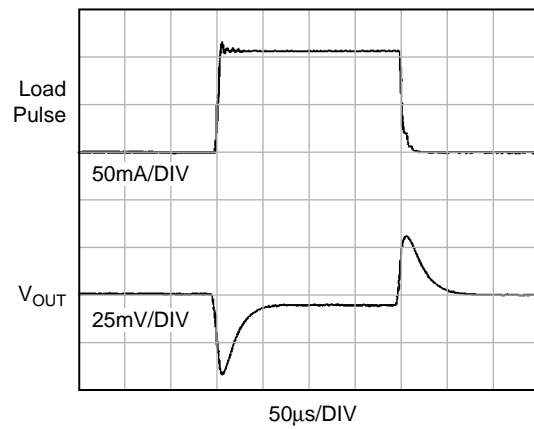

2014/15\_10.eps

**Figure 4. Load Transient Response (100mA Step)**

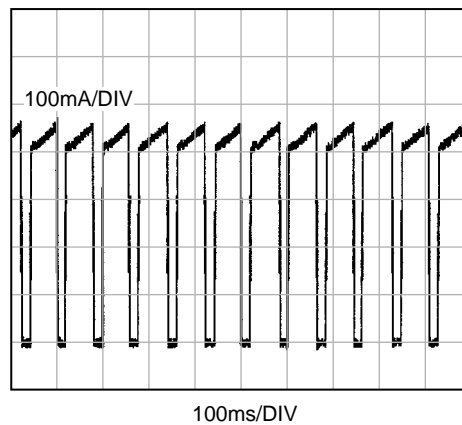

2014/15\_11.eps

**Figure 5. Output Short Circuit Response**

## POWER MANAGEMENT

### 60mA/110mA/160mA Super Low Dropout CMOS Regulators with Battery Life Extending Shutdown Mode and ERROR Output

The IMP2054, IMP2055 and IMP2186 high performance CMOS low dropout voltage regulators offer superior dropout voltage performance and load regulation characteristics as compared to the pin compatible TC1054/1055/1186 devices offered by TelCom Semiconductor. Dropout voltage performance has been improved by up to 40%.

Load regulation and power supply PSRR have been optimized. Load regulation is typically 0.32% and PSRR is 53dB at 1kHz.

A logic input controlled shutdown mode extends system battery life by reducing quiescent current to 0.2 $\mu$ A maximum. The shutdown mode can be initiated by a system microcontroller.


The regulators were designed with ease of use and stability in mind. Stability is guaranteed for 0.47 $\mu$ F and greater load capacitors with an ESR up to 5 $\Omega$ . Ceramic or tantalum capacitors can be used.

Three devices with different guaranteed output current specifications are available: IMP2054 (60mA), IMP2055 (110mA) and IMP2186 (160mA). Each device has output voltage options of 2.5V, 2.7V, 2.85V, 3.0V, 3.3V, 3.6V and 4.0V.

### Key Features

- ◆ Pin Compatible with TelCom TC1054/1055/1186
- ◆ Lower Dropout Voltage for Long Battery Life
  - IMP2054: 70mV vs. TelCom TC1054 120mV
  - IMP2055: 160mV vs. TelCom TC1055 250mV
  - IMP2186: 250mV vs. TelCom TC1186 400mV
- ◆ Power Saving Shutdown Mode
  - 0.2 $\mu$ A shutdown current
- ◆ ERROR Output
  - Low battery detection
  - Processor reset
- ◆ Superior Load Regulation
  - 0.32%
- ◆ Long Battery Life
  - 33 $\mu$ A no load ground current
- ◆ Accurate Output Voltage
  - $\pm 2.5\%$  over temperature
- ◆ Low Drift Output: 40ppm/ $^{\circ}$ C
- ◆ Guaranteed Minimum Output Current
  - IMP2054: 60mA
  - IMP2055: 110mA
  - IMP2186: 160mA
- ◆ Over-Current and Over-Temperature Protection
- ◆ Compact SOT-23A-5 Package

### Typical Application

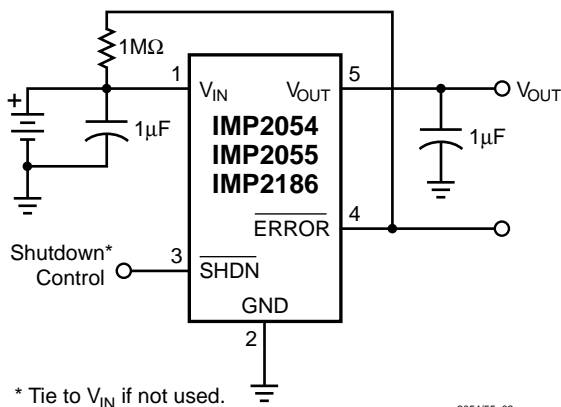


2054/55\_02.eps

### Applications

- ◆ Pagers
- ◆ Cellular/GSM/PHS Phones
- ◆ Instrumentation
- ◆ Wireless Terminals
- ◆ Battery Powered Systems
- ◆ Medical Instruments
- ◆ Linear Post-Regulators

## Pin Configuration

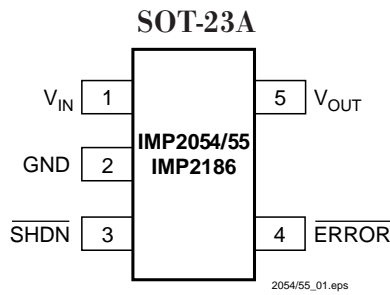

## Pin Descriptions

Pin Number	Name	Function
1	V <sub>IN</sub>	Unregulated supply input.
2	GND	Ground terminal.
3	SHDN	Shutdown control input. A shutdown mode is entered when SHDN is a logic LOW. During shutdown the output voltage falls to 0V and quiescent current drops to 2.0μA.
4	ERROR	Out-of-Regulation Flag output. An open drain output that goes LOW when the output is out-of-tolerance by approximately 5%.
5	V <sub>OUT</sub>	Output voltage

2054/55\_01.eps

## Ordering Information


Part Number*	Package	Output Voltage (V)	Output Current (mA)	Shutdown Pin	Adjust Pin	ERROR Flag Output	Reference Bypass Pin	Package Marking			
								A	B	C	D
IMP2054-2.5JUK/T	SOT23A-5	2.5	60	●		●		R	A	x	x
IMP2054-2.7JUK/T	SOT23A-5	2.7	60	●		●		R	B	x	x
IMP2054-2.85JUK/T	SOT23A-5	2.85	60	●		●		R	C	x	x
IMP2054-3.0JUK/T	SOT23A-5	3.0	60	●		●		R	D	x	x
IMP2054-3.3JUK/T	SOT23A-5	3.3	60	●		●		R	E	x	x
IMP2054-3.6JUK/T	SOT23A-5	3.6	60	●		●		R	F	x	x
IMP2054-4.0JUK/T	SOT23A-5	4.0	60	●		●		R	G	x	x
IMP2055-2.5JUK/T	SOT23A-5	2.5	110	●		●		T	A	x	x
IMP2055-2.7JUK/T	SOT23A-5	2.7	110	●		●		T	B	x	x
IMP2055-2.85JUK/T	SOT23A-5	2.85	110	●		●		T	C	x	x
IMP2055-3.0JUK/T	SOT23A-5	3.0	110	●		●		T	D	x	x
IMP2055-3.3JUK/T	SOT23A-5	3.3	110	●		●		T	E	x	x
IMP2055-3.6JUK/T	SOT23A-5	3.6	110	●		●		T	F	x	x
IMP2055-4.0JUK/T	SOT23A-5	4.0	110	●		●		T	G	x	x
IMP2186-2.5JUK/T	SOT23A-5	2.5	160	●		●		Y	A	x	x
IMP2186-2.7JUK/T	SOT23A-5	2.7	160	●		●		Y	B	x	x
IMP2186-2.85JUK/T	SOT23A-5	2.85	160	●		●		Y	C	x	x
IMP2186-3.0JUK/T	SOT23A-5	3.0	160	●		●		Y	D	x	x
IMP2186-3.3JUK/T	SOT23A-5	3.3	160	●		●		Y	E	x	x
IMP2186-3.6JUK/T	SOT23A-5	3.6	160	●		●		Y	F	x	x
IMP2186-4.0JUK/T	SOT23A-5	4.0	160	●		●		Y	G	x	x

xx = Date Code

\* /T indicates Tape and Reel

2054/55\_03.eps

## Pin Configuration

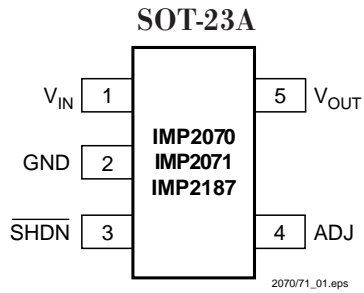

## Pin Descriptions

Pin Number	Name	Function
1	V <sub>IN</sub>	Unregulated supply input.
2	GND	Ground terminal.
3	$\overline{\text{SHDN}}$	Shutdown control input. A shutdown mode is entered when $\overline{\text{SHDN}}$ is a logic LOW. During shutdown the output voltage falls to 0V and quiescent current drops to 2.0 $\mu$ A.
4	ADJ	Output voltage adjustment terminal.
5	V <sub>OUT</sub>	Output voltage.

2070/71\_01.eps

## Ordering Information

Part Number*	Package	Output Voltage (V)	Output Current (mA)	Shutdown Pin	Adjust Pin	ERROR Flag Output	Reference Bypass Pin	Package Marking			
								A	B	C	D
IMP2070JUK/T	SOT23A-5	Adjustable	60	●	●			J	J	x	x
IMP2071JUK/T	SOT23A-5	Adjustable	110	●	●			K	J	x	x
IMP2187JUK/T	SOT23A-5	Adjustable	160	●	●			L	J	x	x

xx = Date Code

\* /T indicates Tape and Reel

2070/71\_003.eps

## Absolute Maximum Ratings

Input Voltage ..... 7V  
 Output Voltage ..... -0.3V to  $V_{IN} + 0.3V$   
 Maximum Voltage on Any Pin ..... -0.3V to  $(V_{IN} + 0.3V)$   
 Shutdown Voltage ( $\overline{SHDN}$ ) .....  $\overline{SHDN} \leq V_{IN} + 0.3V$

*These are stress ratings only and functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability. All voltages are with respect to ground.*

Operating Junction Temperature Range ...  $-40^{\circ}\text{C} < T_J < 125^{\circ}\text{C}$   
 Storage Temperature .....  $-65^{\circ}\text{C}$  to  $150^{\circ}\text{C}$   
 Power Dissipation ..... Internally limited

Note:  $T_J$  = Junction Temperature,  $T_A$  = Ambient Temperature

## Electrical Characteristics

$V_{IN} = V_{OUT} + 1V$ ,  $I_L = 100\mu\text{A}$ ,  $C_L = 1\mu\text{F}$ ,  $\overline{SHDN} > V_{IH}$ ,  $T_A = 25^{\circ}\text{C}$ , unless otherwise noted. **Bold/blue** specifications apply for junction temperature range  $-40^{\circ}\text{C} < T_J < 125^{\circ}\text{C}$ .

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Input Voltage Range	$V_{IN}$	$0^{\circ}\text{C} < T_J < 125^{\circ}\text{C}$			<b>6.50</b>	V
		$-40^{\circ}\text{C} < T_J < 125^{\circ}\text{C}$			<b>6.50</b>	
Maximum Output Current	$I_{OMAX}$	IMP2070	<b>60</b>			mA
		IMP2071	<b>110</b>			
		IMP2187	<b>160</b>			
Adjustable Output Voltage Range			$V_{REF}$		5.5	V
Reference Voltage	$V_{REF}$		<b>1.165</b>	1.20	<b>1.235</b>	V
Dropout Voltage (Note 1)	$V_{IN} - V_O$	$I_L = 100\mu\text{A}$		1		mV
		$I_L = 20\text{mA}$		17	<b>23</b>	
		$I_L = 50\text{mA}$		60	<b>70</b>	
		$I_L = 100\text{mA}$ (IMP2070, IMP2187)		90	<b>160</b>	
		$I_L = 150\text{mA}$ (IMP2187)		143	<b>250</b>	
Quiescent Current (Ground Current)		No load		33	<b>50</b>	$\mu\text{A}$
Shutdown Supply Current	$I_{INSD}$	$\overline{SHDN} = 0V$ $T_J \leq 25^{\circ}\text{C}$		0.2	2	$\mu\text{A}$
Output Temperature Coefficient				40		ppm/ $^{\circ}\text{C}$
Thermal Regulation				0.04		%/W
Line Regulation		$V_R + 1V \leq V_{IN} \leq 6V$		0.0375	<b>0.35</b>	%

- Notes:
- Dropout Voltage is defined as the difference between IN and OUT when  $V_R$  drops 2% below its nominal value.
  - Specifications which would otherwise be affected by self-heating of the die are tested at a constant die temperature by using low duty cycle pulse testing.
  - PSRR guaranteed by design.

2070/71\_102a.eps

## Electrical Characteristics

$V_{IN} = V_{OUT} + 1V$ ,  $I_L = 100\mu A$ ,  $C_L = 1\mu F$ ,  $\overline{SHDN} > V_{IH}$ ,  $T_A = 25^\circ C$ , unless otherwise noted. **Bold/blue** specifications apply for junction temperature range of  $-40^\circ C < T_J < 125^\circ C$ .

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Load Regulation: IMP2070		$I_L = 100\mu A$ to 50mA		0.32	<b>2.0</b>	%
IMP2071		$I_L = 100\mu A$ to 100mA		0.32	<b>2.0</b>	
IMP2187		$I_L = 100\mu A$ to 150mA		0.32	<b>3.0</b>	
Thermal Shutdown Die Temperature				150		$^\circ C$
Thermal Shutdown Hysteresis				12		$^\circ C$
Ripple Rejection	PSRR	$V_{IN} \geq (V_O + 1V) \pm 0.25V$ $C_O = 3.3\mu F$ ceramic				dB
				Freq. = 1kHz	58	
				Freq. = 10kHz	45	
				Freq. = 1MHz	34	
Output Noise		300Hz to 50kHz $I_L = 50mA$ (IMP2070) $I_L = 100mA$		280		$\mu V_{RMS}$
$\overline{SHDN}$ Input HIGH Threshold		$2.5V \leq V_{IN} \leq 6.5V$	<b>45</b>			% of $V_{IN}$
$\overline{SHDN}$ Input LOW Threshold		$2.5V \leq V_{IN} \leq 6.5V$			<b>15</b>	% of $V_{IN}$
$\overline{ERROR}$ Flag Minimum Supply Voltage			1.5			V
$\overline{ERROR}$ Flag Threshold Voltage		$V_{TH}$		$0.95V_R$		V
$\overline{ERROR}$ Flag Hysteresis		$V_{HYS}$		50		mV
$\overline{ERROR}$ Flag Output Low Voltage		$I_{\overline{ERROR}} = 1mA$		75	<b>400</b>	mV
Reverse Current into $V_{OUT}$		$V_{(IN)} < V_{(OUT)}$ $\overline{SHDN} = HIGH = V_{IN}$		2.0		mA
		$V_{(IN)} < V_{(OUT)}$ $\overline{SHDN} = LOW$		2.7		$\mu A$
Output Current Limit				350	<b>600</b>	mA
Adjust Input Leakage Current	$I_{ADJ}$			50		pA

- Notes: 1. Dropout Voltage is defined as the difference between IN and OUT when  $V_R$  drops 2% below its nominal value.  
 2. Specifications which would otherwise be affected by self-heating of the die are tested at a constant die temperature by using low duty cycle pulse testing.  
 3. PSRR guaranteed by design.

2070/71\_102b.eps