



电子元器件系列(中国.厦门) China.Xiamen
www.rf-china.com RF-Micom co.,Ltd

Email:sales@rf-china.com

Telephone:0086-592-5713956 Fax:5201617

Dielectric Filters (GIGAFIL®)

muRata


1

Band Pass Filters



DFCB Series 800/900MHz

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0±5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

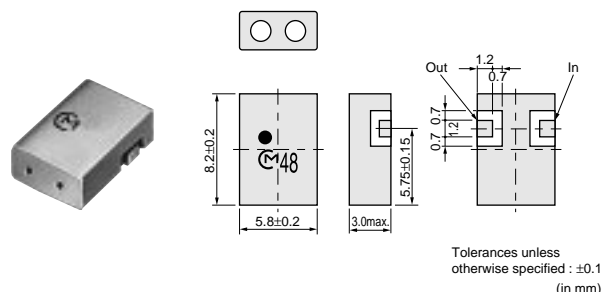

■ Characteristics

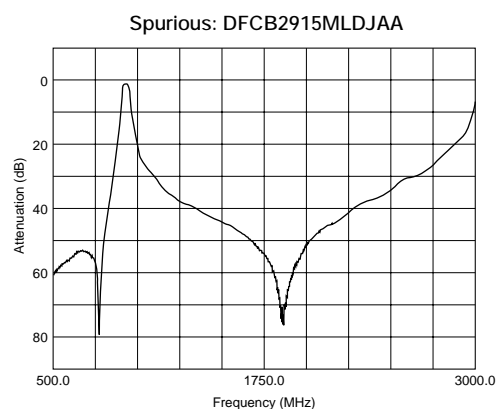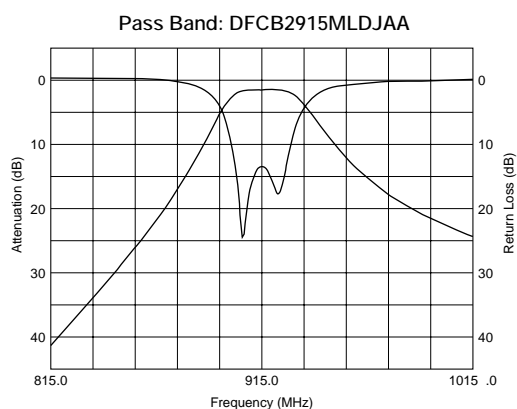

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
AMPS	DFCB2836MLDJAA	836.5	25	2.6	6.5 (869 to 894MHz)	-30 to +85
CT2	DFCB2841MLEJAA	841	4	3.0	38 (Fo-150MHz)	-30 to +85
CT2	DFCB2866MLEJAA	866	4	3.0	38 (Fo-150MHz)	-30 to +85
AMPS	DFCB2881MLDJAA	881.5	25	2.6	9 (824 to 849MHz)	-30 to +85
CT1+	DFCB2886MLEJAA	886	2	3.0	24 (Fo-44MHz)	-30 to +85
GSM	DFCB2902MLDJAA	902.5	25	2.6	27 (Fo-77.5MHz)	-30 to +85
WLAN915	DFCB2903MLEJAA	903	2	3.0	20 (Fo+22MHz)	-30 to +85
CT2	DFCB2912MLDJAA	912	4	2.0	50 (Fo-150MHz)	-30 to +85
CT2	DFCB2912MLEJAA	912	4	3.0	38 (Fo-150MHz)	-30 to +85
CT1	DFCB2914MLEJAA	914.5	1	3.0	24 (Fo-44MHz)	-30 to +85
WLAN915	DFCB2915MLDJAA	915	26	2.5	27 (837.5MHz)	-35 to +85
WLAN915	DFCB2926MLEJAA	926.25	2.7	2.8	21 (902.4 to 905.1MHz)	-30 to +85
WLAN915	DFCB2927MLEJAA	927	2	3.0	15 (Fo-22MHz)	-30 to +85
CT1+	DFCB2931MLEJAA	931	2	3.0	24 (Fo-44MHz)	-30 to +85
GSM	DFCB2947MLDJAA	947.5	25	2.6	27 (Fo-77.5MHz)	-30 to +85
CT1	DFCB2959MLEJAA	959.5	1	3.0	30 (Fo+44MHz)	-30 to +85
LMR	DFCB3815MLDJAA	815.5	19	2.5	12 (Fo±35.5MHz)	-30 to +85
AMPS	DFCB3836MLDJAA	836.5	25	3.0	12 (869 to 894MHz)	-30 to +85
CT2	DFCB3841MLEJAA	841	4	5.3	60 (Fo-150MHz)	-30 to +85
LMR	DFCB3860MLDJAA	860.5	19	2.5	13 (Fo-35.5MHz)	-30 to +85

Continued on the following page.


Continued from the preceding page.

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
CT2	DFCB3866MLEJAA	866	4	5.3	60 (Fo-150MHz)	-30 to +85
AMPS	DFCB3881MLDJAA	881.5	25	3.0	15 (824 to 849MHz)	-30 to +85
CT1+	DFCB3886MLEJAA	886	2	5.3	45 (Fo-44MHz)	-30 to +85
GSM	DFCB3902MLDJAA	902.5	25	3.0	45 (Fo-77.5MHz)	-30 to +85
WLAN915	DFCB3903MLEJAA	903	2	5.3	29 (Fo-22MHz)	-30 to +85
CT2	DFCB3912MLEJAA	912	4	5.3	60 (Fo-150MHz)	-30 to +85
CT1	DFCB3914MLEJAA	914.5	1	5.3	45 (Fo-44MHz)	-30 to +85
WLAN915	DFCB3915MLDJAA	915	26	3.0	15 (Fo-32.5MHz)	-30 to +85
WLAN915	DFCB3927MLEJAA	927	2	5.3	29 (Fo-22MHz)	-30 to +85
CT1+	DFCB3931MLEJAA	931	2	5.3	45 (Fo-44MHz)	-30 to +85
GSM	DFCB3947MLDJAA	947.5	25	3.0	45 (Fo-77.5MHz)	-30 to +85
CT1	DFCB3959MLEJAA	959.5	1	5.3	45 (Fo-44MHz)	-30 to +85


Continued from the preceding page.

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
PHS	DFCB21G90LBJAB	1907.5	25	1.6	35 (1655 to 1680MHz)	-15 to +55
PHS	DFCB21G90LBJAC	1907.5	25	1.9	45 (1655 to 1680MHz)	-15 to +55
DECT (CHINA)	DFCB21G91LBJAA	1910	20	1.7	34 (1675 to 1700MHz)	-30 to +85
DECT (CHINA)	DFCB21G91LDJAA	1910	20	1.8	40 (1675 to 1700MHz)	-30 to +85
CDMA1.9	DFCB21G92LBJAA	1920	20	1.2	20 (1655 to 1694MHz)	-30 to +85
CDMA1.9	DFCB21G92LDJAA	1920	20	1.9	16 (1800 to 1820MHz)	-30 to +85
PCS1.9	DFCB21G96LDJAA	1960	60	1.5	17 (2360MHz)	-30 to +85
TD-SCDMA	DFCB22G01LBJAA	2017.5	15	1.5	35 (1270MHz)	-35 to +85
W-CDMA	DFCB22G14LBJAA	2140	60	2.7	26 (1920 to 1980MHz)	-30 to +85
Sirius Radio	DFCB22G32LBJAA	2326	14	1.8	8.5 (2227MHz)	-35 to +85
XM Satellite	DFCB22G33LBJAA	2339	14	1.8	8.5 (2240MHz)	-35 to +85
WLAN2.4	DFCB22G44LANAA	2441.5	83	1.5	35 (2000MHz)	-35 to +85
WLAN2.4	DFCB22G44LBJAA	2442	84	2.0	16 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCB22G45LBJAA	2450	100	2.0	15 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCB22G48LBJAA	2484	26	2.0	27.5 (Fo-204MHz)	-30 to +85
VICS	DFCB22G50LBJAA	2500	4	4.5	20 (2440MHz)	-30 to +85
WLAN5G	DFCB25G25LAHAA	5250	200	1.5	38 (4370 to 4510MHz)	-35 to +85
WLAN5G	DFCB25G59LAHAA	5597.5	255	1.5	11 (Fo-375MHz)	-35 to +85
WLAN5G	DFCB25G77LAHAA	5775	100	1.5	12 (Fo-375MHz)	-35 to +85
ETC	DFCB25G80LBHAA	5800	100	2.0	25 (Fo-375MHz)	-30 to +85
DAB	DFCB31G47LBJAA	1472	40	3.0	45 (1100MHz)	-35 to +85
DCS1800	DFCB31G74LBJAA	1747.5	75	3.5	45 (1464 to 1539MHz)	-30 to +85
DCS1800	DFCB31G84LBJAA	1842.5	75	3.5	45 (1559 to 1634MHz)	-30 to +85
DCS1800	DFCB31G84LBJAB	1842.5	75	2.75	45 (0.3 to 1388MHz)	-30 to +85
PCS1.9	DFCB31G88LBJAA	1880	60	3.7	5 (1930MHz)	-30 to +85
PCS1.9	DFCB31G88LBJAB	1880	60	4.0	41 (2043 to 2103MHz)	-30 to +85
W-CDMA	DFCB31G95LBJAA	1950	60	3.5	35 (2110 to 2170MHz)	-30 to +85
PCS1.9	DFCB31G96LBJAA	1960	60	3.7	5 (1910MHz)	-30 to +85
PCS1.9	DFCB31G96LBJAB	1960	60	3.0	10 (1498 to 1860MHz)	-30 to +85
PCS1.9	DFCB31G96LBJAC	1960	60	2.8	10 (1860MHz)	-30 to +85
PCS1.9	DFCB31G96LBJAE	1960	60	3.7	20 (2065 to 2125MHz)	-35 to +85
W-CDMA	DFCB32G14LBJAA	2140	60	3.7	30 (1920 to 1980MHz)	-30 to +85
Sirius Radio	DFCB32G32LBJAA	2326	14	3.0	24 (2227MHz)	-35 to +85
XM Satellite	DFCB32G33LBJAA	2339	14	3.0	24 (2240MHz)	-35 to +85
WLAN2.4	DFCB32G44LBJAA	2442	84	3.2	30 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCB32G45LBJAA	2450	100	3.2	30 (Fo-250MHz)	-30 to +85
WLAN5G	DFCB35G25LAHAA	5250	200	3.3	45 (4450 to 4650MHz)	-35 to +85
WLAN5G	DFCB35G59LAHAA	5597.5	255	3.6	45 (4750 to 5000MHz)	-35 to +85
WLAN5G	DFCB35G77LAHAA	5775	100	3.0	30 (Fo-375MHz)	-35 to +85
WLAN5G	DFCB35G80LBHAA	5800	150	3.4	10 (Fo-175MHz)	-35 to +85

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+-5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine



Pass Band: DFCH3897MHDJAA

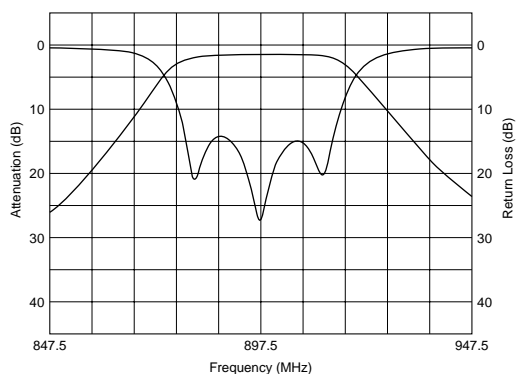

The graph displays the frequency response of a 100% coupled directional coupler. The x-axis represents Frequency in MHz, ranging from 892.5 to 992.5. The left y-axis represents Attenuation in dB, ranging from 0 to 40. The right y-axis represents Return Loss in dB, ranging from 0 to 40. The solid line shows the Attenuation, which has a sharp dip at 942.5 MHz. The dashed line shows the Return Loss, which also has a sharp dip at 942.5 MHz, indicating a resonance frequency.

Figure 1 is a line graph showing the attenuation of a 100-MHz signal as a function of frequency. The x-axis is labeled "Frequency (MHz)" and ranges from 500.0 to 3000.0 with major grid lines every 500.0 MHz. The y-axis is labeled "Attenuation (dB)" and ranges from 0 to 80 with major grid lines every 20 dB. The curve starts at approximately 65 dB at 500 MHz, rises to a sharp peak of 0 dB at 1000 MHz, drops to a sharp minimum of approximately 75 dB at 1500 MHz, and then rises to a broad peak of approximately 10 dB at 2500 MHz, before decreasing again.

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
LMR	DFCH3815MHDJAA	815	20	2.8	36 (Fo±80MHz)	-30 to +85
AMPS	DFCH3836MHDJAA	836.5	25	2.6	12 (Fo±32.5MHz)	-30 to +85
LMR	DFCH3860MHDJAA	860	20	2.8	36 (Fo±80MHz)	-30 to +85
AMPS	DFCH3881MHDJAA	881.5	25	2.6	12 (Fo±32.5MHz)	-30 to +85
ETACS	DFCH3888MHDJAA	888.5	33	3.0	7 (Fo±28.5MHz)	-30 to +85
EGSM	DFCH3897MHDJAA	897.5	35	3.0	6 (Fo±27.5MHz)	-30 to +85
GSM	DFCH3902MHDJAA	902.5	25	2.6	12 (Fo±32.5MHz)	-30 to +85
ETACS	DFCH3933MHDJAA	933.5	33	3.0	7 (Fo±28.5MHz)	-30 to +85
EGSM	DFCH3942MHDJAA	942.5	35	3.0	6 (Fo±27.5MHz)	-30 to +85
GSM	DFCH3947MHDJAA	947.5	25	2.6	12 (Fo±32.5MHz)	-30 to +85
ETACS	DFCH4888MHDJAA	888.5	33	4.6	15 (Fo±28.5MHz)	-30 to +85

8


Continued from the preceding page.

Application	Part Number	fo (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
EGSM	DFCH4897MHDJAA	897.5	35	4.6	13 (Fo±27.5MHz)	-30 to +85
ETACS	DFCH4933MHDJAA	933.5	33	4.6	15 (Fo±28.5MHz)	-30 to +85
EGSM	DFCH4942MHDJAA	942.5	35	4.6	13 (Fo±27.5MHz)	-30 to +85


1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0 ± 5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine




Pass Band: DFCH31G95HDHAA

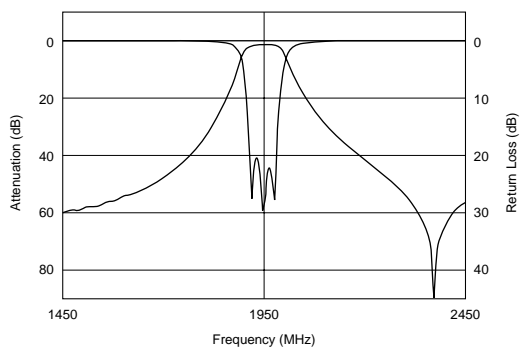


Spurious: DFCH31G95HDHAA

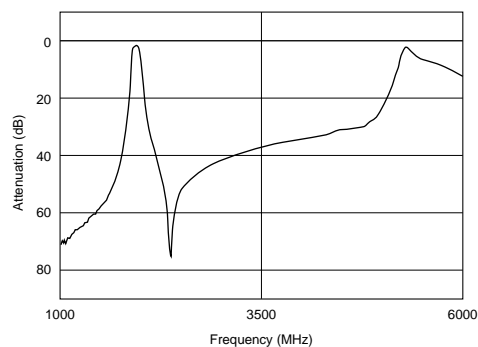

Pass Band: DFCH32G14HDHA

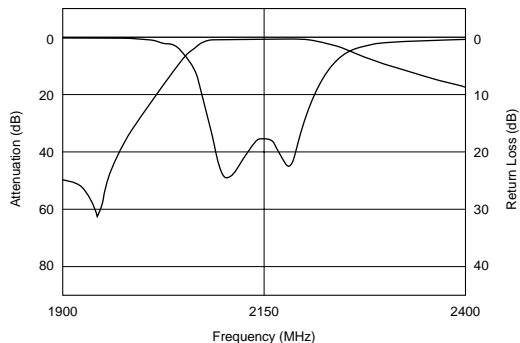

Spurious: DFCH32G14HDHA

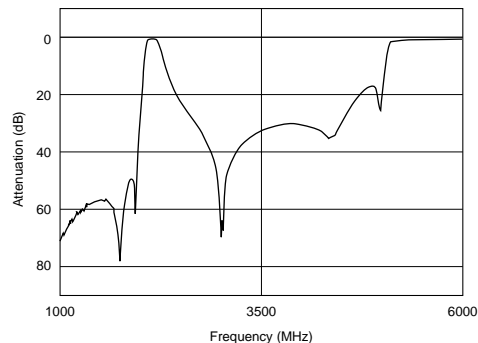


Application	Part Number	f _o (MHz)	Bandwidth (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temp. (°C)
GPS	DFCH21G57HDHAA	1575.5	2	0.9	16 (Fo-140MHz)	-30 to +85
PHS	DFCH21G90HDJAA	1907.5	25	0.7	35 (Fo-227.5MHz)	-30 to +85
WLAN2.4	DFCH22G44HDHAA	2442	84	1.2	15 (Fo±250MHz)	-30 to +85
WLAN2.4	DFCH22G45HDHAA	2450	100	1.0	16 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCH22G48HDHAA	2484	26	2.5	47 (Fo-270MHz)	-30 to +85
VICS	DFCH22G50HDHAA	2500	4	2.4	10 (Fo±60MHz)	-30 to +85
MSAT	DFCH31G54HDJAA	1542	34	3.0	30 (1626.5 to 1660.5MHz)	-30 to +85
MSAT	DFCH31G64HDJAA	1643.5	34	3.0	30 (1525 to 1559MHz)	-30 to +85
DCS1800	DFCH31G74HDJAA	1747.5	75	2.0	8 (Fo±80MHz)	-30 to +85
DCS1800	DFCH31G84HDJAA	1842.5	75	2.0	8 (Fo±80MHz)	-30 to +85
PCS1.9	DFCH31G88HDJAA	1880	60	2.2	15 (Fo±100MHz)	-30 to +85
W-CDMA	DFCH31G95HDHAA	1950	60	1.8	45 (1550MHz)	-30 to +85
PCS1.9	DFCH31G96HDJAA	1960	60	2.2	15 (Fo±100MHz)	-30 to +85
W-CDMA	DFCH32G14HDHAA	2140	60	1.3	52 (1325 to 1385MHz)	-30 to +85
MMDS	DFCH32G15HDHAB	2156	20	3.0	36 (2050MHz)	-35 to +85
WLAN2.4	DFCH32G44HDHAA	2442	84	2.4	36 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCH32G45HDHAA	2450	100	2.3	36 (Fo-250MHz)	-30 to +85
WLAN2.4	DFCH32G48HDHAA	2484	26	3.0	45 (Fo-270MHz)	-30 to +85
DCS1800	DFCH41G74HDJAA	1747.5	75	3.6	10 (Fo±57.5MHz)	-30 to +85
DCS1800	DFCH41G84HDJAA	1842.5	75	3.6	10 (Fo±57.5MHz)	-30 to +85
PCS1.9	DFCH41G88HDJAA	1880	60	4.5	12 (Fo±50MHz)	-30 to +85
PCS1.9	DFCH41G96HDJAA	1960	60	4.5	12 (Fo±50MHz)	-30 to +85
MMDS	DFCH42G59HDHAB	2593	186	1.8	50 (Fo-400MHz)	-35 to +85

muRata

2

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+-5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine



■ Characteristics

The graph displays two metrics against frequency from 769 MHz to 969 MHz. The solid line represents Attenuation (dB), which starts at 0 dB at 769 MHz, remains flat until about 840 MHz, then drops sharply to a minimum of approximately 65 dB at 869 MHz, before rising back to 0 dB by 969 MHz. The dashed line represents Return Loss (dB), which starts at approximately 15 dB at 769 MHz, remains flat until about 840 MHz, then drops sharply to a minimum of approximately 35 dB at 869 MHz, before rising back to approximately 15 dB by 969 MHz.

Frequency (MHz)	Attenuation (dB)	Return Loss (dB)
769	0	15
800	0	15
840	0	15
869	65	35
900	0	15
969	0	15

12


AMPS/CDMA800: DFYG Series

■ Features


1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+-5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine



DFYG7836MLEJAA

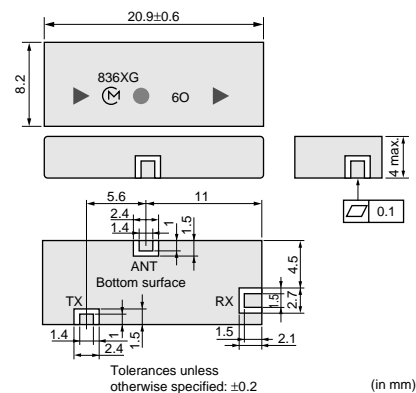


DFYG7836MLEJAB

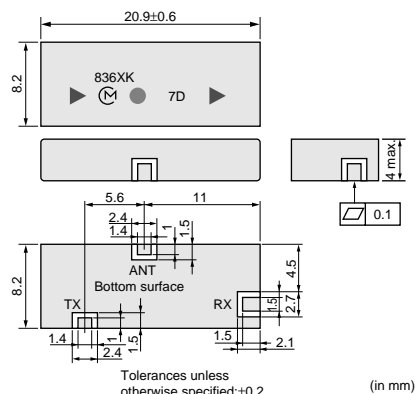


■ Characteristics


Pass Band (Tx): DFYG7836MLEJAA

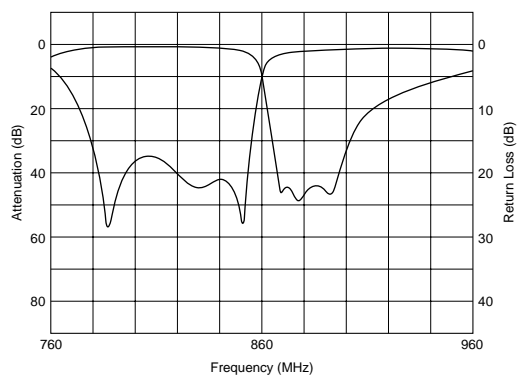


Spurious (Tx): DFYG7836MLEJAA

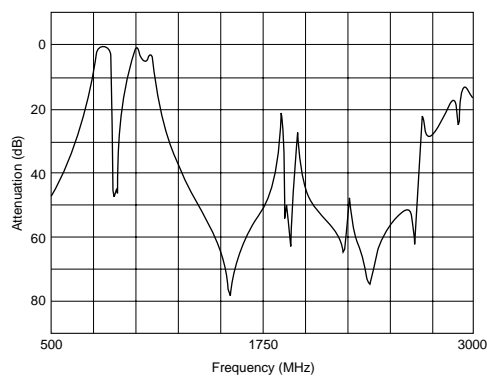

Pass Band (Rx): DFYG7836MLEJAA

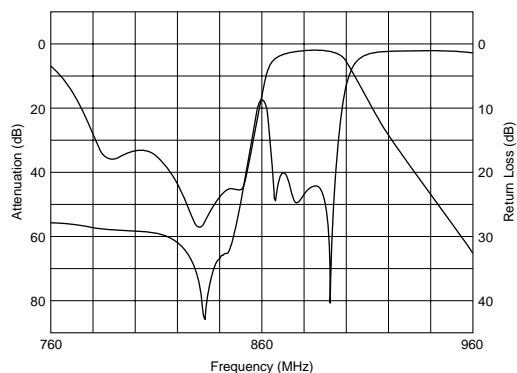

Spurious (Rx): DFYG7836MLEJAA

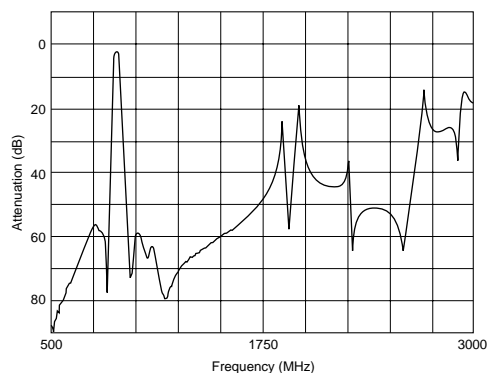


Continued on the following page. ➤


Continued from the preceding page.

Characteristics


Pass Band (Tx): DFYG7836MLEJAB

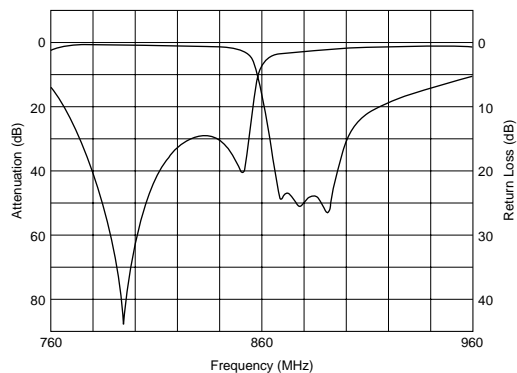


Spurious (Tx): DFYG7836MLEJAB

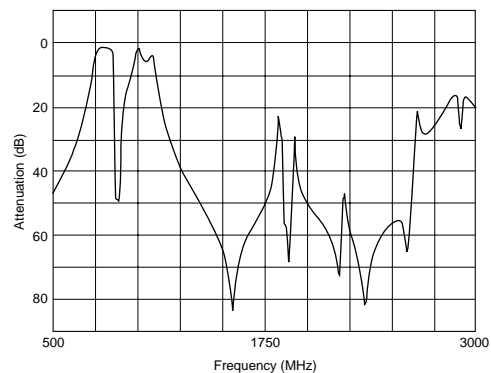

Pass Band (Rx): DFYG7836MLEJAB

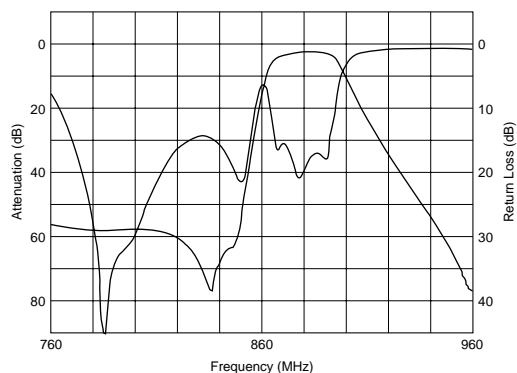

Spurious (Rx): DFYG7836MLEJAB

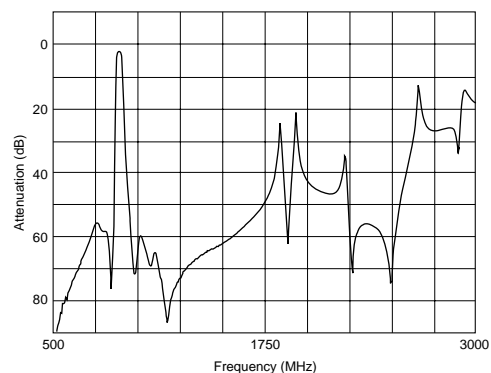


Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYG7836MLEJAA	836.5	25	2.6	42 (869 to 894MHz)	881.5	25	4.1	50 (824 to 849MHz)	-30 to +85
DFYG7836MLEJAB	836.5	25	2.6	42 (869 to 894MHz)	881.5	25	4.5	56 (824 to 849MHz)	-30 to +85





GSM: DFYG Series

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+-5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

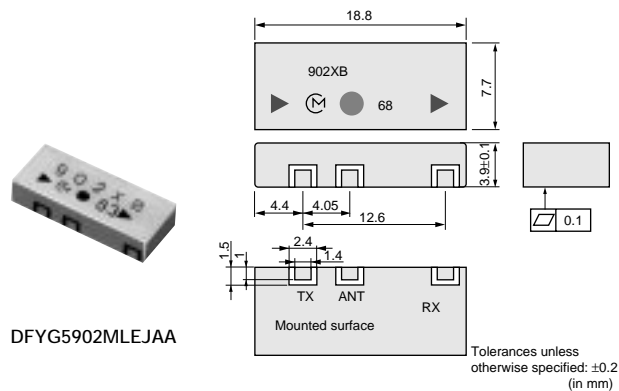

■ Characteristics

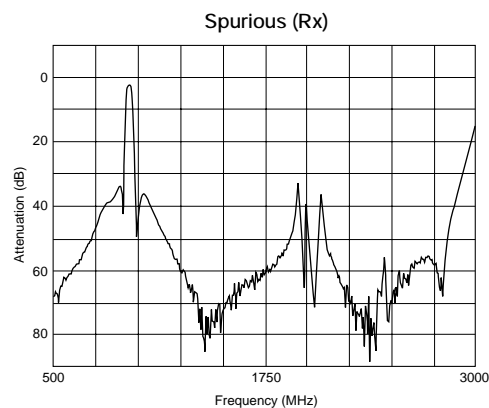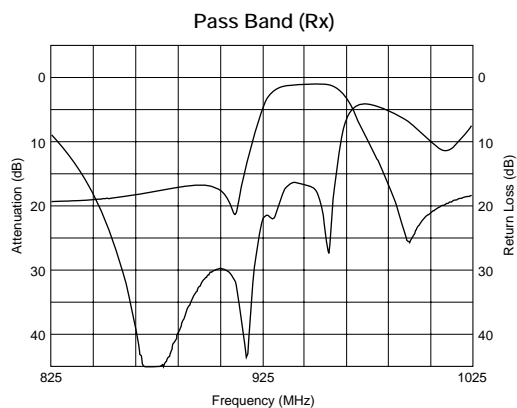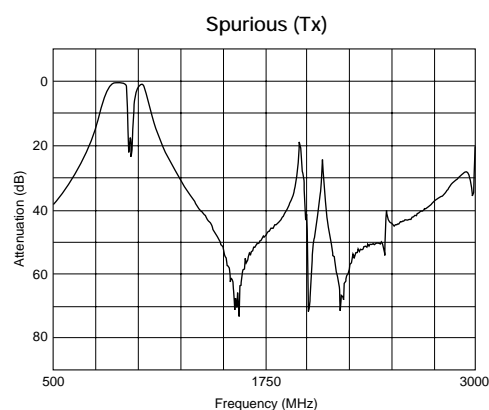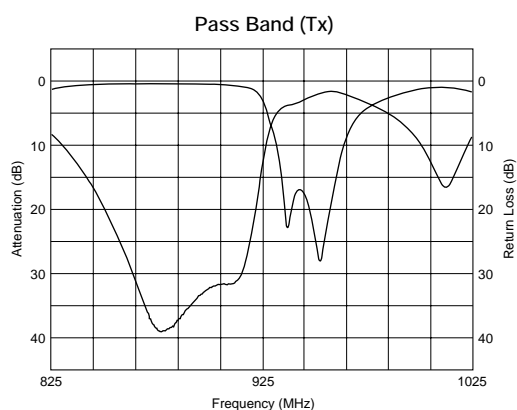


Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYG5902MLEJAA	902.5	25	1.3	14 (935 to 960MHz)	947.5	25	3.5	29 (890 to 915MHz)	-30 to +85
DFYG5902MLEJAB	902.5	25	1.8	14.5 (935 to 960MHz) -20 to +75 degree C	947.5	25	3.2	30 (890 to 915MHz)	-20 to +75
DFYG6902MLEJAA	902.5	25	2.2	20 (935 to 960MHz)	947.5	25	3.2	30 (890 to 915MHz)	-20 to +75

KPCS: DFYK Series


■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+-5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine


■ Characteristics

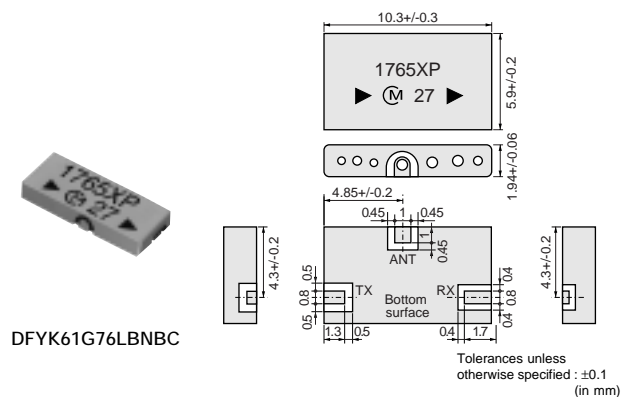


Pass Band (Tx)

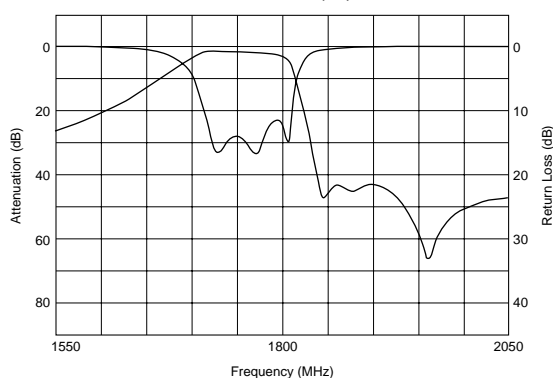


Spurious (Tx)

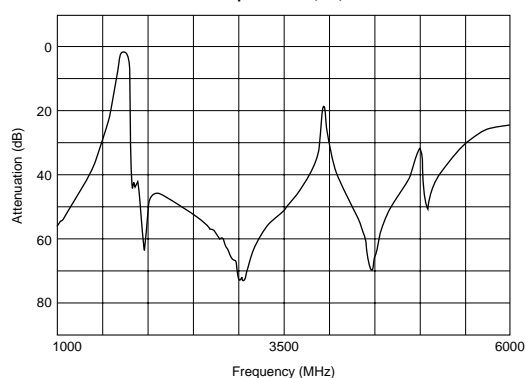

Pass Band (Rx)

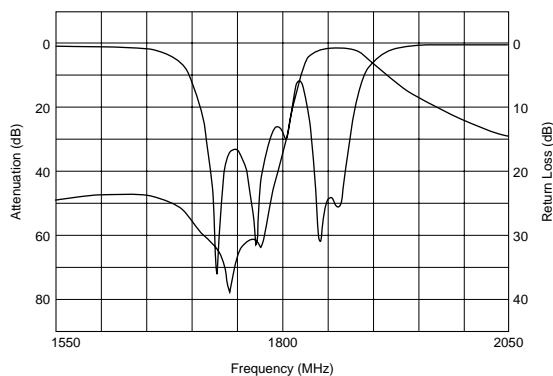

Spurious (Rx)

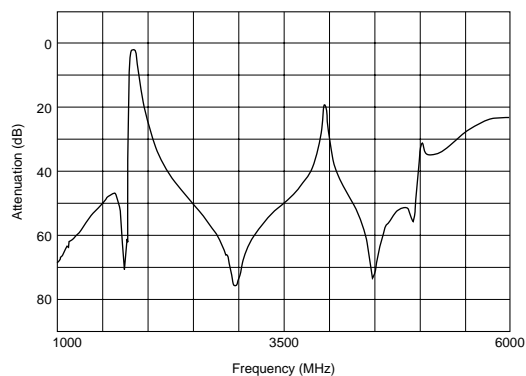

Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYK61G76LBNBC	1765	30	2.3	38 (1840 to 1870MHz)	1855	30	3.3	57 (1750 to 1780MHz)	-35 to +85


CDMA1.9: DFYK Series

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine







DFYK91G88LEHAC

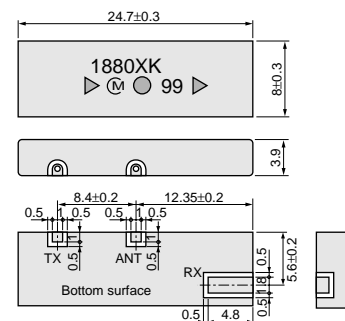

Tolerances unless
otherwise specified : ±0.1

(in mm)

■ Characteristics

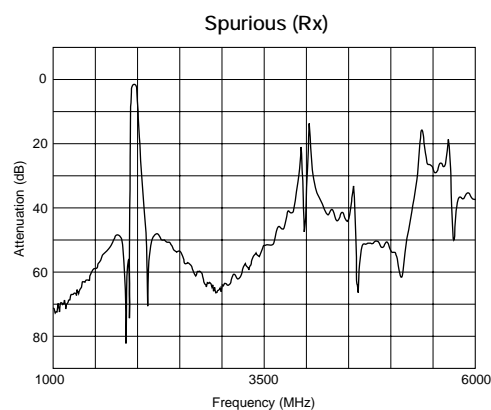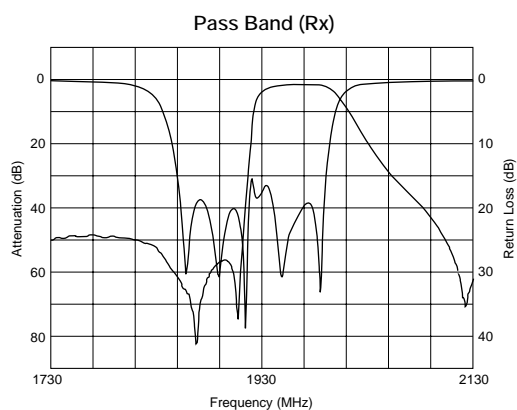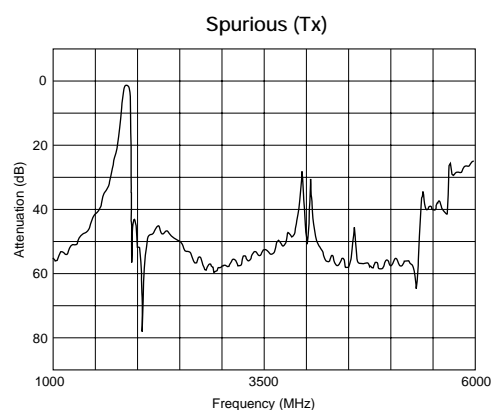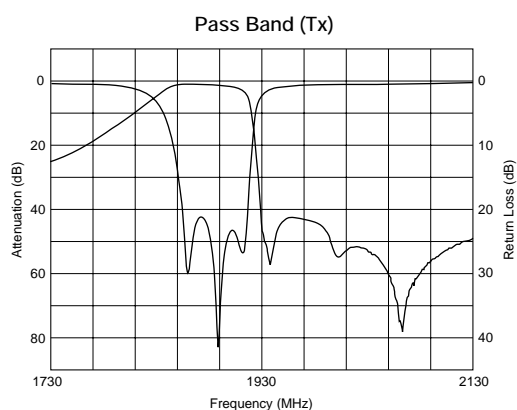


Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYK91G88LEHAB	1880	60	3.4	40 (1930 to 1990MHz)	1960	60	4.1	50 (1850 to 1910MHz) 0 to +35 degree C	-35 to +85
DFYK91G88LEHAC	1880	60	3.4	40 (1930 to 1990MHz)	1960	60	4.6	53 (1850 to 1910MHz) -35 to +85 degree C	-35 to +85

W-DCMA: DFYK Series


■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0±5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine


■ Characteristics

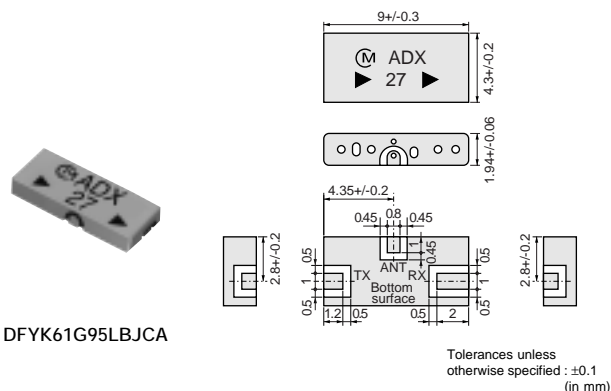


Pass Band (Tx)

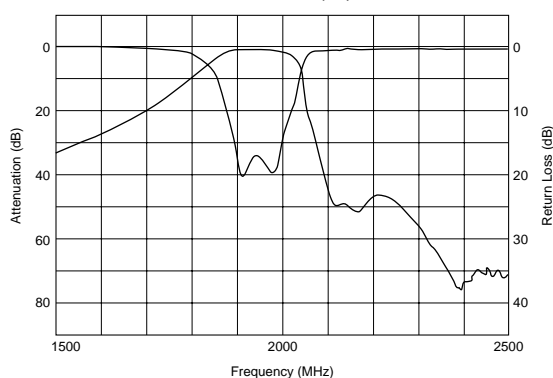


Spurious (Tx)

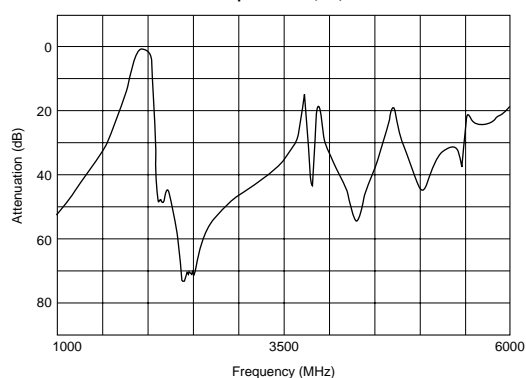

Pass Band (Rx)

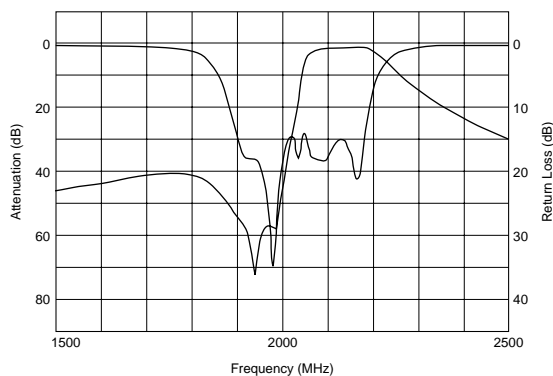

Spurious (Rx)

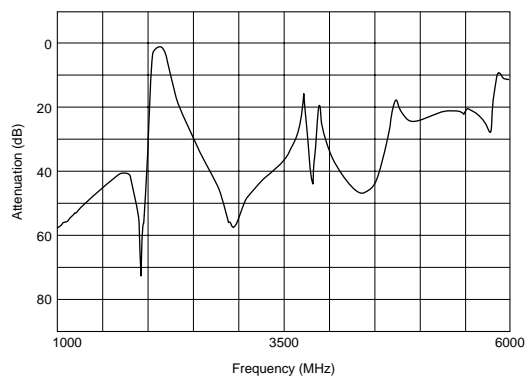


Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYK61G95LBJCA	1950	60	1.5	44 (2110 to 2170MHz)	2140	60	1.8	54 (1920 to 1980MHz)	-35 to +85
DFYK61G95LBNCB	1950	60	1.4	43 (2110 to 2170MHz)	2140	60	2.2	48 (1920 to 1980MHz)	-35 to +85





CDMA800: DFYH Series

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

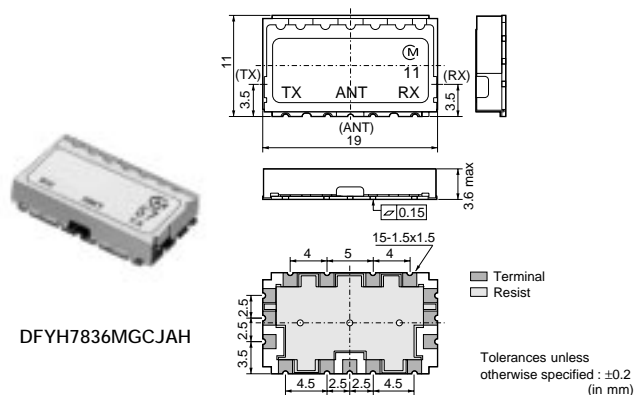

■ Characteristics

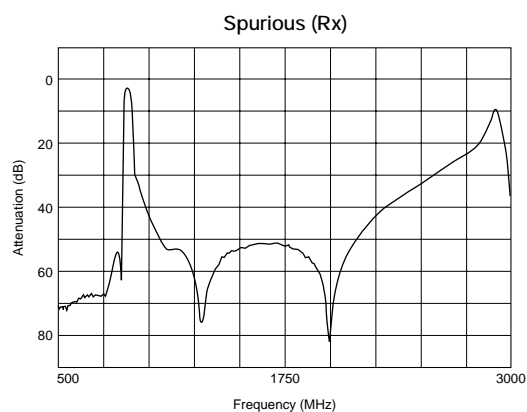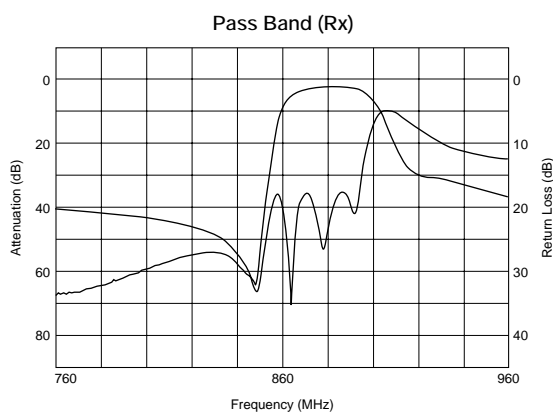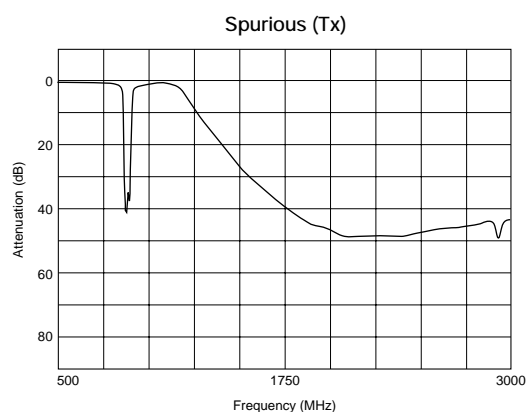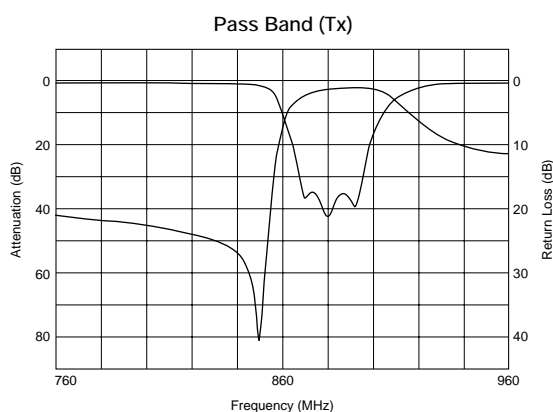


Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYH7836MGCJAH	836.5	25	2.0	32 (869 to 894MHz)	881.5	25	4.3	50 (824 to 849MHz)	-30 to +85





AMPS/CDMA800: DFYH Series

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

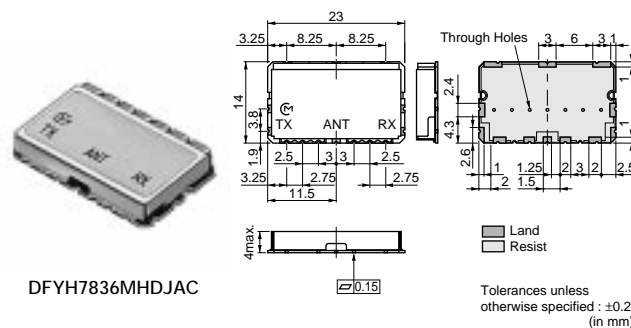

■ Characteristics

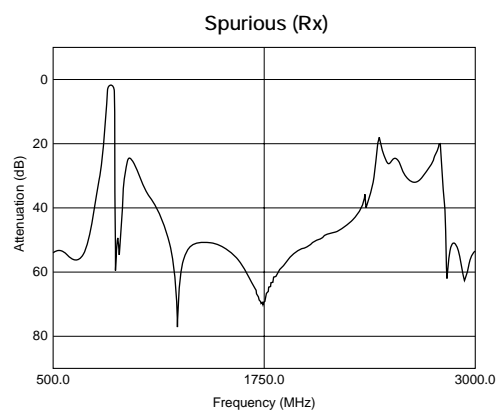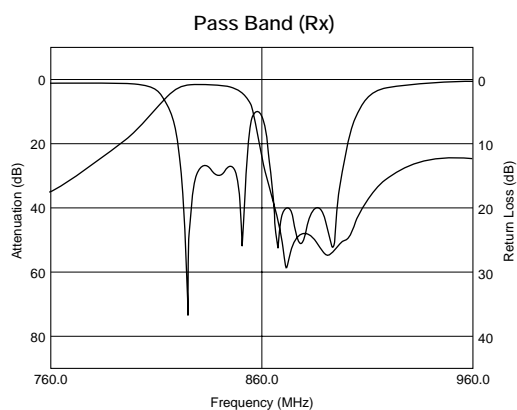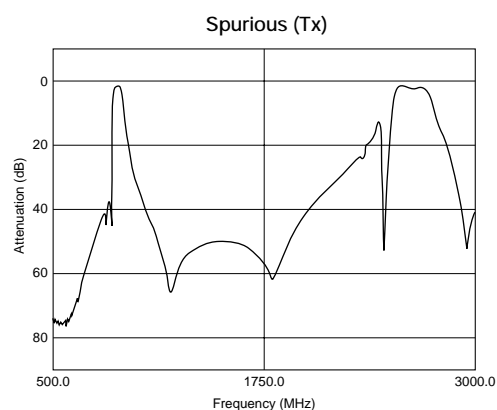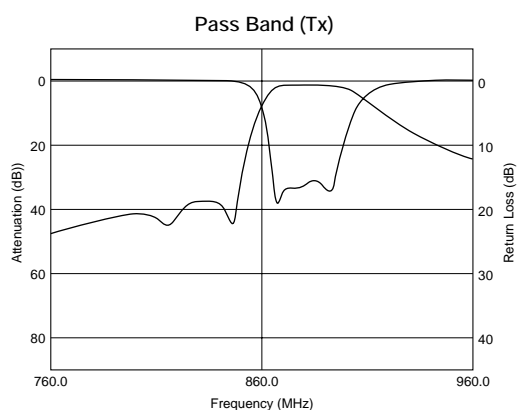


Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYH7836MHDJAC	881.5	25	3.0	35 (824 to 849MHz)	836.5	25	4.0	45 (869 to 894MHz)	-30 to +85





EGSM: DFYH Series

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0±5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

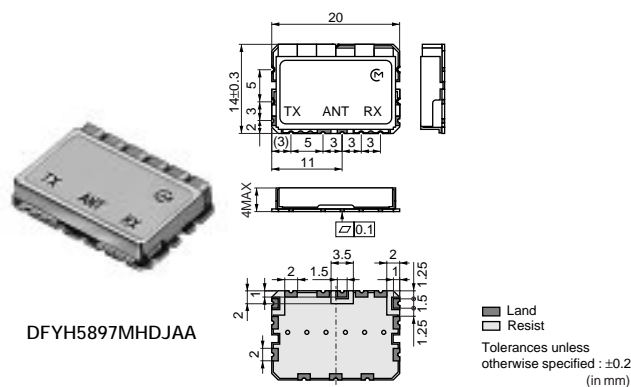

■ Characteristics

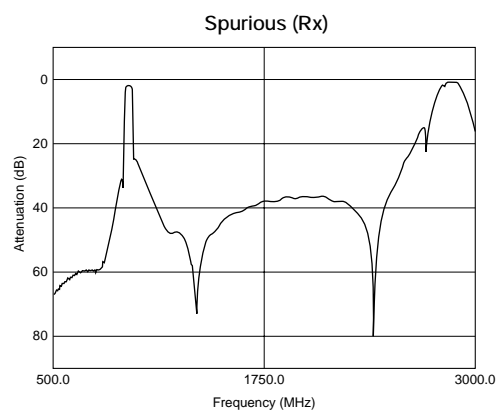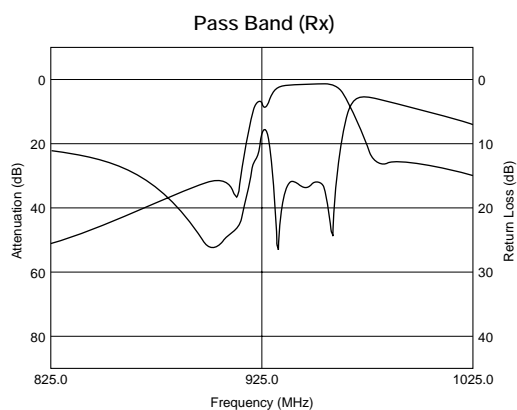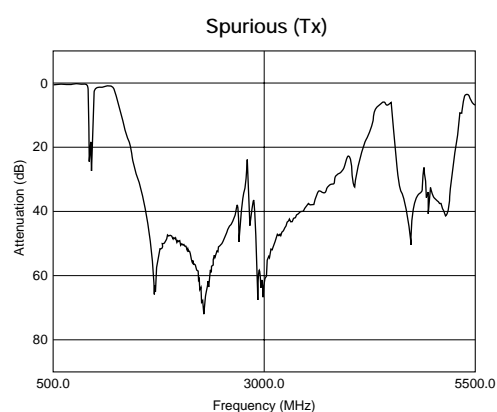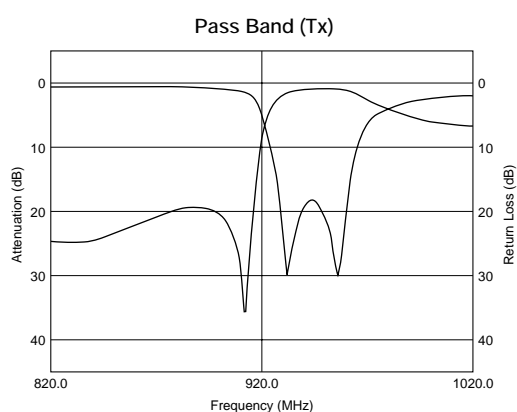


Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYH5897MHDJAA	897.5	35	2.0	15 (935 to 960MHz)	942.5	35	4.3	20 (905 to 915MHz)	-30 to +85





GSM: DFYHA Series

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

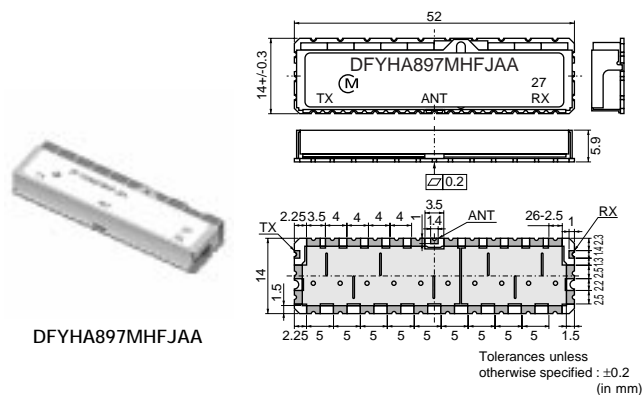


■ Characteristics

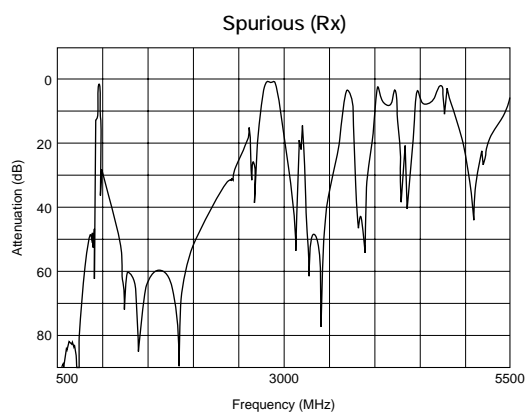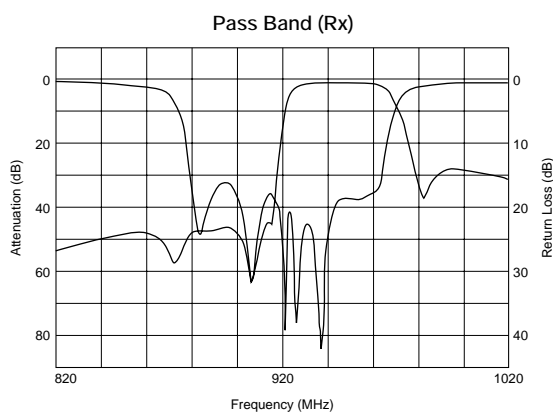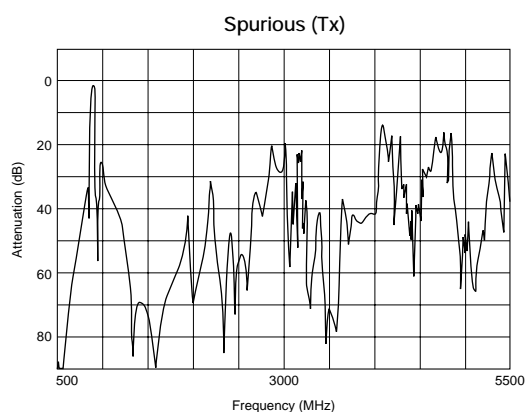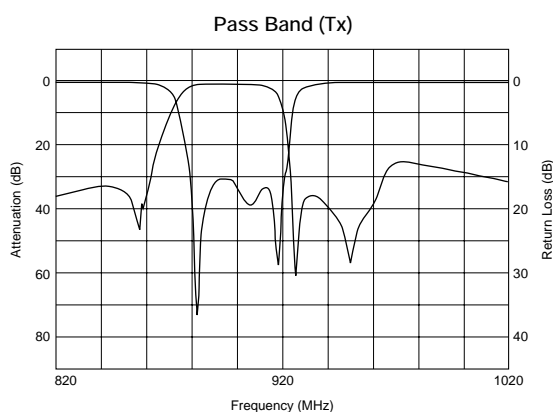





Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYHA897MHFJAA	897.5	35	3.7	30 (925 to 960MHz)	942.5	35	4.4	40 (880 to 915MHz)	-35 to +85

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0 ± 5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

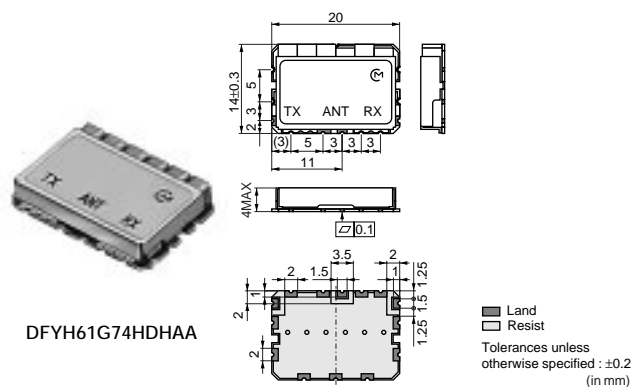

■ Characteristics

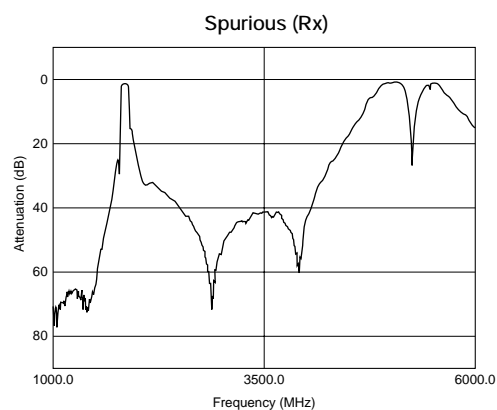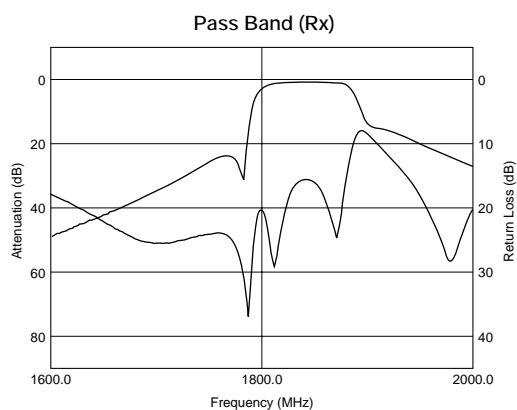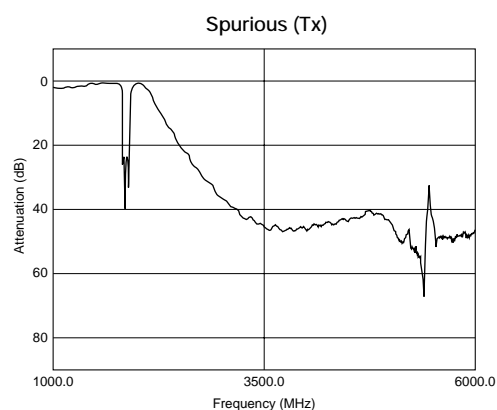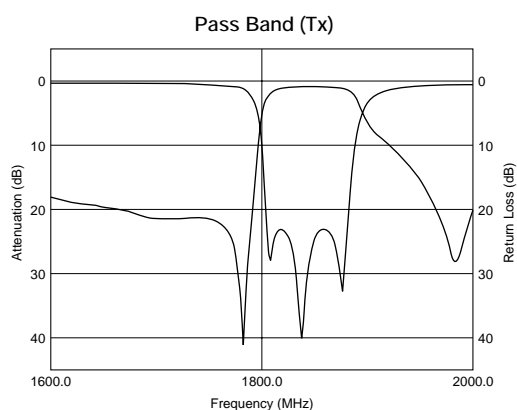


Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYH61G74HDHAA	1747.5	75	2.3	20 (1805 to 1880MHz)	1842.5	75	2.7	20 (1710 to 1785MHz)	-30 to +85
DFYH61G74HDHAB	1747.5	75	2.0	15 (1805 to 1880MHz)	1842.5	75	3.0	20 (1710 to 1785MHz)	-30 to +85
DFYHA1G74HFHAB	1747.5	75	3.8	42 (1805 to 1880MHz)	1842.5	75	4.3	42 (1710 to 1785MHz)	-35 to +85





PCS1.9: DFYH Series

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

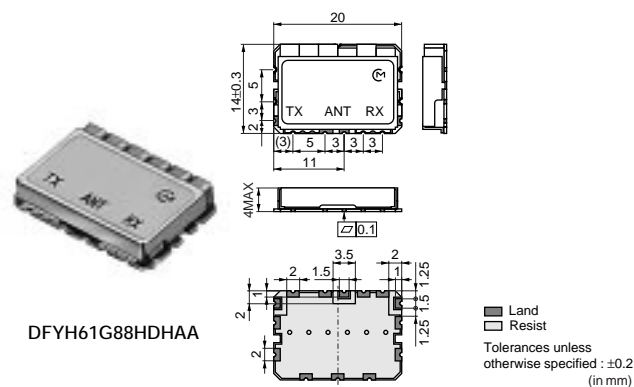

■ Characteristics

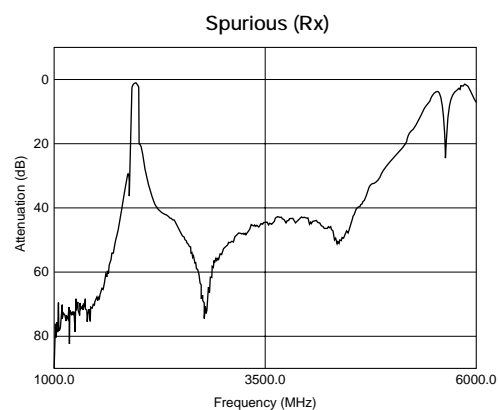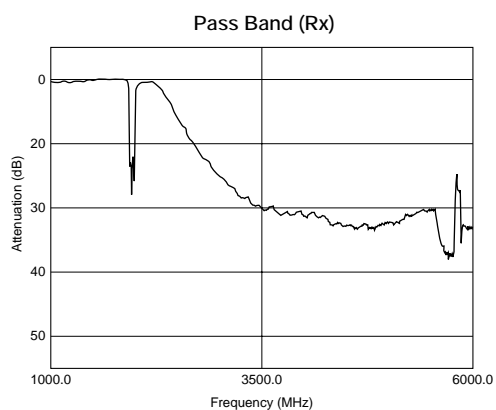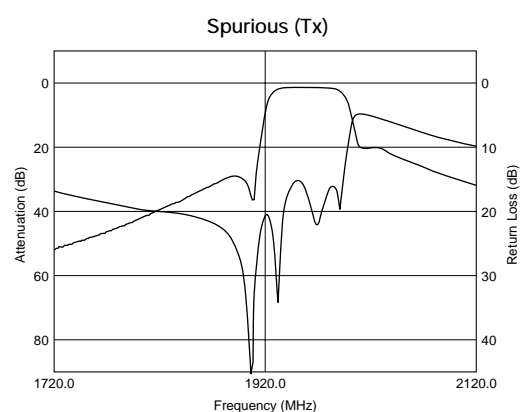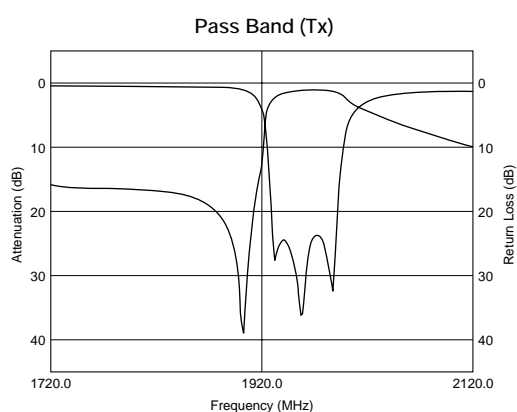






Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYH61G88HDHAA	1880	60	2.0	17 (1930 to 1990MHz)	1960	60	3.0	20 (1850 to 1910MHz)	-30 to +85
DFYH61G88HDHAB	1880	60	2.3	20 (1930 to 1990MHz)	1960	60	3.2	25 (1850 to 1910MHz)	-30 to +85

LMR: DFYH Series

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0±5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

■ Characteristics

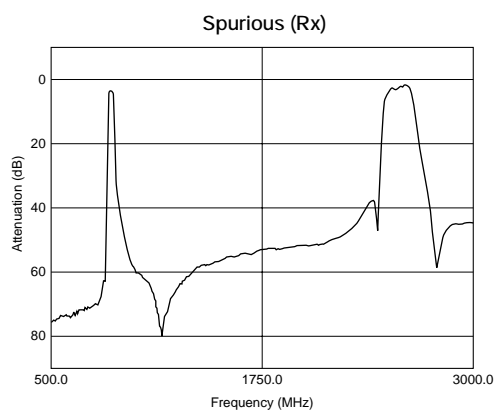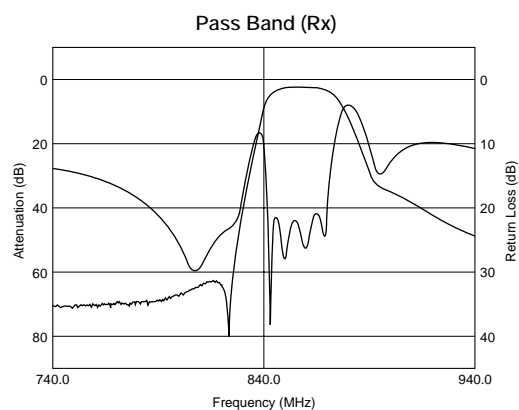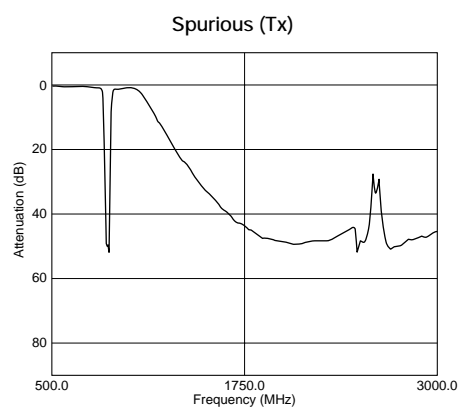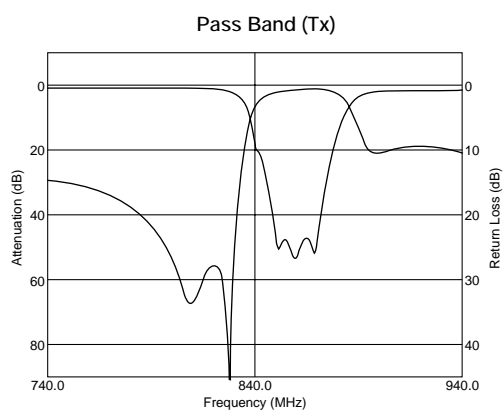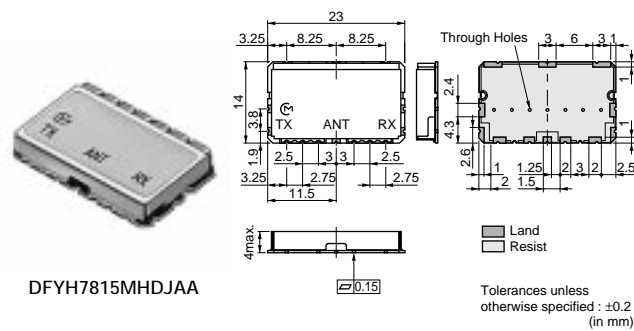

Part Number	fo (Tx) (MHz)	Bandwidth (Tx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	fo (Rx) (MHz)	Bandwidth (Rx) (MHz)	IL at BW (dB max.)	Attenuation (dB min.)	Operation Temperature Range (°C)
DFYH7815MHDJAA	815	20	2.0	40 (850 to 870MHz)	860	20	4.0	57 (805 to 825MHz)	-30 to +85

